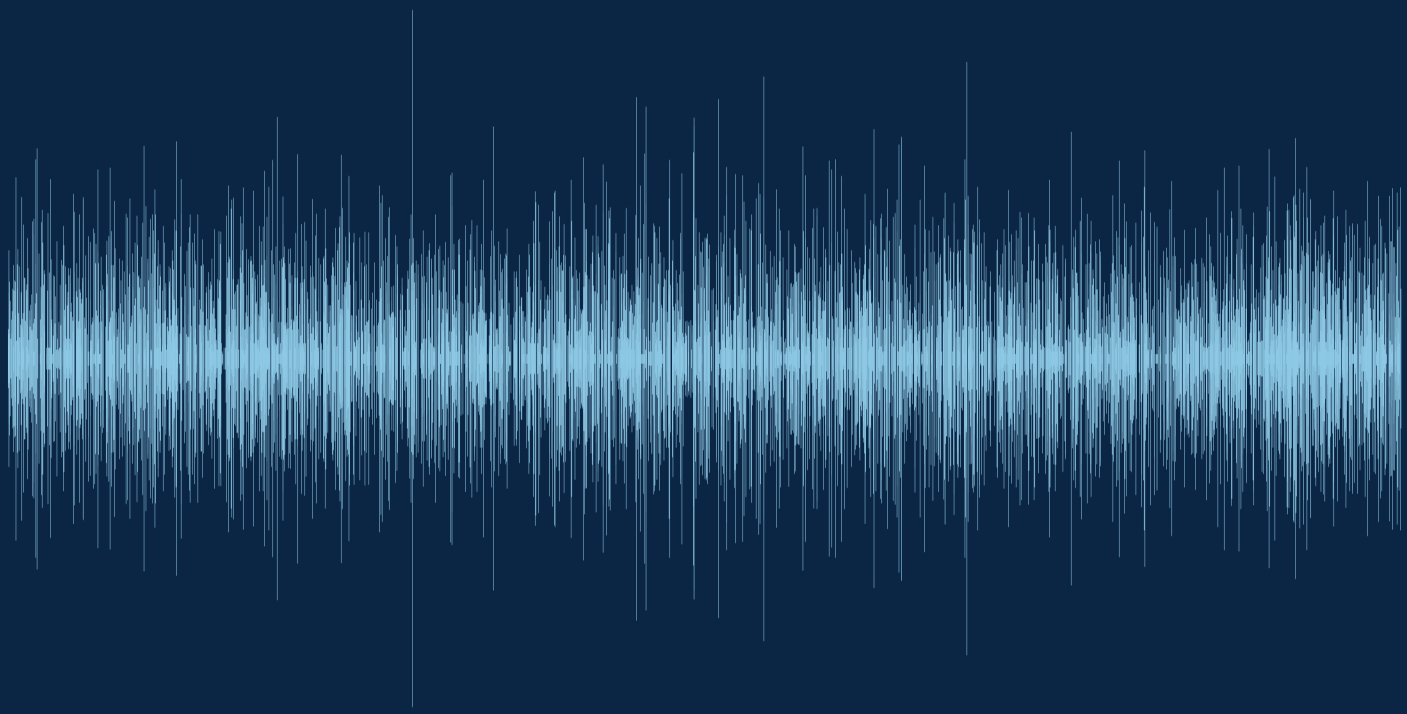


Triton User Manual

Simulation of rainwater harvesting systems in buildings: the method, the tutorial, the guides and the references, in one volume.

COMPLETE EDITION · SEVEN CHAPTERS AND TEN APPENDICES

Igor Catão Martins Vaz & Enedir Ghisi
Sustainable Environments Research Group
Federal University of Santa Catarina
2026 · Version 0.2.0

Publication record

Element	Content
Title	Triton: user manual
Authors	Igor Catão Martins Vaz; Enedir Ghisi
Edition	Version 0.2.0, International Edition
Publisher	Federal University of Santa Catarina
Research group	Sustainable Environments
Year	2026
Licence	Academic source-available (non-commercial use), see LICENSE.md

How to cite

Author-date style

> Vaz, I. C. M., & Ghisi, E. (2026). *Triton: user manual* (Version 0.2.0). Federal University of Santa Catarina.

BibTeX

```
@manual{tritonmanual2026en,
  title     = {Triton: user manual},
  author    = {Vaz, Igor Catão Martins and Ghisi, Enedir},
  edition   = {Version 0.2.0},
  publisher = {Federal University of Santa Catarina},
  year      = {2026}
}
```

When citing results obtained with the program, also state the version used and the source of the rainfall series, following the list in section 4.10.

About this edition

This is the manual of the **International Edition (INT)** of Triton. It is written in English and is self-contained: the section numbers, figures, tables and equations are those of this edition.

The International Edition ships no national data. You supply the rainfall series, the water and sewage tariff, the costs and the emission factors, in the currency you choose, and the program calculates in the same way wherever the project is. Three example cities (New York, London and Cape Town) come with the program, with ERA5 reanalysis rainfall and the published tariff of each city, so that every case of the manual can be reproduced (appendices D, E and J).

Costs in the examples are illustrative. Where a case of the manual prints a cost, it is a rounded figure that lets you follow the method, labelled as illustrative, not a market price. Replace it with your own before drawing any economic conclusion.

Numbers follow the English convention (a point for decimals, a comma for thousands).

How to use this manual

It was not written to be read from cover to cover. Section 1.3 tells you where to enter, depending on what you want to do.

You want to	Read
learn to use the program	chapter 4, the tutorial
solve a case	chapter 3, the guides
publish a study	chapter 2, the method; and section 4.10
review a study	chapter 5, and appendices A and B
avoid mistakes	section 5.1

The manual assumes an engineering reader who does not yet know the subject: concepts are introduced before they are used, and the vocabulary is in appendix G. Two kinds of box appear throughout the text:

The box	When it appears
with a **blue** rule	a warning or remark that changes what you do
with an **orange** rule, marked In depth	the technical detail behind it; can be skipped on a first reading

> **Every number printed in this manual is calculated by the program.** The tables and figures were not typed: they are produced by running Triton with the input data each section declares. Each published value has a matching automatic check, so that a fix in the program cannot leave the manual lying. Section 5.3 explains how this is done.

Contents

1 Start here

1.1 What Triton does, and what it does not

1.2 Installation and first run

1.3 Where to start, depending on your goal

2 The method

2.1 The daily water balance

2.2 Ideal volume and the sweep

2.3 Efficiency indicators

2.4 Rainfall indices

2.5 Sizing the treatment line

2.6 Pumping energy

2.7 Economic analysis and tariff regimes

2.8 Life cycle assessment

2.9 Certifications

2.10 Multi-criteria decision

3 Guides available in the program

3.1 Comparing cities

3.2 Using a future climate scenario

3.3 Adjusting the tariff of your site

3.4 Modulating the demand by calendar

3.5 Simulating schools, hospitals and shops

3.6 Comparing many cases at once

3.7 Sensitivity analysis

3.8 Importing a legacy project

3.9 Exporting to CAD, BIM and spreadsheets

4 Tutorial: one example from start to finish

4.1 The project and the rain

4.2 The building and the demand

4.3 The first simulation

4.4 Choosing the volume

4.5 Is an upper tank needed?

4.6 What quality the use requires

4.7 What it costs and how fast it pays back

4.8 How much carbon it avoids

4.9 Which volume to choose, after all

4.10 The report, and what to declare in a paper

5 Mistakes, limitations and reliability

5.1 Ten mistakes the program does not prevent

5.2 Known limitations

5.3 How the program is verified

6 Fixes, bugs and versioning

6.1 Checking the results against other tools

6.2 Error messages and what to do

6.3 Version history and what changed

6.4 How to report a problem

6.5 Roadmap

7 Probabilistic modulation

7.1 What probabilistic modulation is

7.2 The variables and the distributions

7.3 How to run it

7.4 How to read the results

7.5 Method, statistics and limits

Appendices

Appendix A — The project parameters

Appendix B — The program's processes

Appendix C — Emission factors

Appendix D — Tariff regimes

Appendix E — Climate database

Appendix F — Files, folders and formats

Appendix G — Glossary

Appendix H — References

Appendix I — One-page summaries

Appendix J — Example files

List of figures

Figure 1 — Components of a building rainwater harvesting system and the path of the water, from collection to the point of use

Figure 2 — The same system seen in section

Figure 3 — Destination of the precipitation of one day

Figure 4 — Sequence of operations of the daily balance, in the order the program runs them, in the notation of the equations of the daily balance section

Figure 5 — The six dimensions of analysis and the question assessed in each one

Figure 6 — The four reading paths of the manual

Figure 7 — Which part of the total consumption rainwater can supply, depending on the uses the project intends

Figure 8 — The twelve steps of the program, grouped by nature

Figure 9 — The ten days of the worked case: (a) collected volume, in blue, and overflowed volume, in orange, by day: on day 8 the overflow almost equals the collection; (b) volume stored in the lower tank at the end of each day, after consumption, with the 2,000 L capacity dashed; on days 5 to 8 the tank reaches capacity, overflows and ends the day with 1,920 L

Figure 10 — Sequence of operations of the daily balance: (a) the order adopted by the program, with the overflow calculated before consumption; (b) the reversed order (YBS), with consumption withdrawn before the overflow

Figure 11 — Saving potential curve of the same building, swept with a 250 L step and with a 5,000 L step

Figure 12 — Sweep of the tutorial project read by three criteria: (a) saving potential and (b) net present value of the same set of volumes

Figure 13 — The three efficiency indicators and what each one counts

Figure 14 — Daily supply classes: full (V_con,t = D_pl,t), partial (0 < V_con,t < D_pl,t) and none (V_con,t = 0). The filled height represents the fraction of the day's rainwater demand supplied by rainwater

Figure 15 — Four of the nine indices marked over one year of the New York series: PRCPTOT and SDII, at the top; RX1day, the largest daily value of the year; CDD, the longest sequence of dry days, in the shaded band; and R20mm, the days with 20 mm or more, marked at the bottom

Figure 16 — Walsh and Lawler (1981) seasonality index in the three example cities (New York, London and Cape Town), with the classes of the index in the background and the mean annual precipitation under the name of each city

Figure 17 — Total annual precipitation (PRCPTOT) of the New York series, with the mean of the period as a dashed line, in the indices tab

Figure 18 — Longest annual sequence of dry days (CDD) and of wet days (CWD) of the New York series, in the indices tab

Figure 19 — Components of the treatment line sized by the program, in the order of the flow, and destination of the material retained

Figure 20 — The three disinfection technologies, the residual effect of each one and the make-up of the annual running cost (OPEX). The residual effect distinguishes chlorination from the others: it protects the stored water, while ultraviolet radiation and ozone act only on the water passing through the equipment

Figure 21 — Energy chain of pumping

Figure 22 — (a) Manometric head of a building rising main: geometric difference in level between the water surfaces of the cistern and the upper tank, plus the head losses; (b) energy line along a stretch of pipe, with the continuous friction loss (h_f) and the local losses at a valve and an elbow (h_loc)

Figure 23 — Illustrative efficiency of induction motors by power for a standard and a high-efficiency class: efficiency rises with power

Figure 24 — Monthly water and sewage bill of the tutorial project, broken down into parts, without and with the system

Figure 25 — The six tariff block codes and the effect of each one on the monthly water and sewage bill

Figure 26 — Distribution of the example tariffs among the six tariff regimes

Figure 27 — Initial investment broken down into the seven items the program adds up, for three volumes of polyethylene tank

Figure 28 — Cash flow of the tutorial project over twenty years: annual saving on the water and sewage bill and annual costs, with the initial investment in year zero, in nominal values; and cumulative balance discounted at the minimum attractive rate of return, which does not cross zero within the twenty years: there is no payback

Figure 29 — The seven stages of the inventory, grouped by the nature of the emission

Figure 30 — Boundary of the program's environmental assessment: (a) processes included — embodied carbon of the tanks, the piping and the pump set, operational emissions of pumping and of treatment consumables, and the credit for the potable water avoided; (b) processes excluded — civil works, maintenance and replacement, end of life and impact categories beyond global warming

Figure 31 — The thresholds of reduction in potable water consumption with which the program places the project in LEED v4 (credits WEc1 and WEc2), LEED v5 (credit WEc2, options 1, 2 and 4) and EDGE, on the same scale

Figure 32 — TOPSIS score of each volume of the sweep of the tutorial project, with a polyethylene cistern, the four dimensions weighted equally and equal criterion shares; the star marks the volume with the highest score

Figure 33 — First-rank acceptability (b^1) of each candidate volume, obtained with five thousand vectors of eight criterion weights drawn with 25% expected on each dimension

Figure 34 — (a) Mean annual precipitation and (b) potable water saving potential of the tutorial project, with 150 m^2 of catchment, 600 L/day of demand, a 28% suppliable fraction and a 4,000 L cistern, in New York, London and Cape Town

Figure 35 — Mean monthly precipitation in (a) New York, (b) London and (c) Cape Town, on the same scale; the dashed line is the monthly mean of each series

Figure 36 — The shape of two typical emission pathways

Figure 37 — Water part of the monthly bill as a function of consumption, in three minimum-charge regimes

Figure 38 — The four modulation modes, what each one asks of the user and the situation in which each one is justified

Figure 39 — Demand profiles used in the comparison, expressed as the ratio between the month's demand and the mean demand

Figure 40 — (a) Demand profiles of the school and the hotel over the mean monthly precipitation of the city of each case; (b) saving potential of each profile against the same annual demand spread evenly

Figure 41 — The eight available building types, grouped by the tariff category the utility charges

Figure 42 — Plausible range of variation of each assumption in a sensitivity analysis, with the origin of the uncertainty

Figure 43 — The variation of the net present value when each assumption is changed by 30% up and down, keeping the others

Figure 44 — New York precipitation series used throughout the tutorial (ERA5 reanalysis, 1991 to 2020): (a) total precipitation of each year, with the thirty-year mean as a solid line and the years above the mean in blue and below it in orange; (b) frequency distribution of daily precipitation on wet days, on a logarithmic scale, which shows how few days account for the largest volumes

Figure 45 — The mean seasonal cycle of the series, calculated and drawn by the program as soon as the precipitation is loaded

Figure 46 — The runoff coefficient the program gives to each roof material, with the values the program uses

Figure 47 — The usual ranges of per capita consumption by building type

Figure 48 — Typical split of the consumption of a house by end use

Figure 49 — States of the suppliable-fraction field in the interface

Figure 50 — The level of the cistern over the first year of the series, with the daily rain in the background

Figure 51 — (a) Saving potential as a function of the tank volume, approaching the 28% ceiling without crossing it, with the ideal volume marked; (b) marginal gain, on a logarithmic scale, with the 1 %/m^3 threshold adopted in the tutorial

Figure 52 — The first chart of the results tab: the potable water saving potential as a function of the lower tank volume

Figure 53 — The second chart: the marginal gain, in percentage points per added cubic metre

Figure 54 — The third chart: the overflowed volume and the rainwater volume consumed, both annual, on the same scale

Figure 55 — The fourth chart: the split of the days of the period into fully supplied, partly supplied and not supplied

Figure 56 — Use of the lower tank capacity in the tutorial project, with a rainwater demand of 168 L/day: (a) duration curves of the stored autonomy at the end of each day, in days of rainwater demand, for 2, 4, 10 and 20 m^3; (b) annual turnovers of the volume, given by the ratio between the annual rainwater consumption and the capacity, with the fraction of days on which the tank ends empty (up to 5% of the capacity) shown under each volume

Figure 57 — The program's four quality classes and the status of each one

Figure 58 — The chart of the economic tab: the net present value of each volume of the sweep, with the economic maximum and the technical optimum marked

Figure 59 — The chart of the environmental tab for the same project, with a concrete cistern: the parts of the carbon balance over twenty years, with illustrative factors

Figure 60 — Cumulative net emissions of the 4,000 L cistern over the service life, for polyethylene and concrete, with illustrative factors

Figure 61 — Net emissions over twenty years of the 4,000 L cistern, by material, with illustrative factors

Figure 62 — Net emissions over twenty years against the cistern volume, for (a) polyethylene and (b) concrete, in the tutorial project, with illustrative factors

Figure 63 — The chart of the decision tab: the closeness-to-ideal score of each candidate volume, with the four dimensions weighted equally and the highest score marked with a star

Figure 64 — The second chart of the decision tab: how close each volume comes to the best observed value on each of the eight criteria, with the volume of the highest TOPSIS score marked

Figure 65 — Catchment area as the horizontal projection of the roof

Figure 66 — Number of tests and of files in each family of the verification suite, as collected in this version

Figure 67 — The five verification layers of the program, from the unit tests, numerous and aimed at local errors, to the manual check, occasional and aimed at model errors

Figure 68 — Breakdown of the mean divergence between the program and an independent reference

Figure 69 — Potable water savings by lower-tank volume in the tutorial example: band between the 5th and 95th percentiles of the realisations, median and deterministic study

Figure 70 — Net present value by lower-tank volume in the same example

Figure 71 — Frequency, as a percentage of the realisations, with which each volume is the technical ideal, the economic optimum and the volume with the highest TOPSIS score in the tutorial example

Figure 72 — Spearman rank correlation of each drawn variable with potable water savings and with the net present value at the volume chosen by the tutorial study, from the largest to the smallest influence on the net present value

List of tables

Table 1 — System requirements to install and run the program

Table 2 — What the International Edition brings and what it leaves to you

Table 3 — File formats the program saves and the content of each one

Table 4 — Example files distributed with the program

Table 5 — Recommended reading path depending on the reader's goal

Table 6 — Choice between fixed volume and sweep depending on the question of the study

Table 7 — Hydraulic criteria to decide on the upper tank

Table 8 — Input data of the ten-day worked case

Table 9 — Precipitation series of the ten days of the worked case (New York, September 2018)

Table 10 — Daily water balance of the worked case, day by day, with collection, consumption, overflow and storage

Table 11 — Check of the mass balance closure over the ten days

Table 12 — Indicators of the ten-day worked case

Table 13 — Variables of Equation 1

Table 14 — Variables of Equation 2

Table 15 — Variables of Equation 5

Table 16 — Withdrawal of the day and volume stored at the end of the day under strict YAS, strict YBS and in Triton

Table 17 — Variables of Equation 7

Table 18 — Variables of Equation 8

Table 19 — Variables of Equation 9

Table 20 — Variables of Equation 10

Table 21 — Variables of Equation 11

Table 22 — Variables of Equation 12

Table 23 — Volumes given by classical sizing rules for the tutorial project, rounded to 250 L, and the potential each one yields in the daily simulation

Table 24 — Storage fraction of the sweep volumes and the simulation time step Fewkes and Butler (2000) recommend for each range

Table 25 — Variables of Equation 13

Table 26 — Variables of Equation 14

Table 27 — Variables of Equation 15

Table 28 — Variables of Equation 16

Table 29 — Variables of Equation 17

Table 30 — Variables of Equation 18

Table 31 — Variables of Equation 19

Table 32 — Variables of Equation 20

Table 33 — Summary of the indicators, with the denominator and the question each one answers

Table 34 — Variables of Equation 21

Table 35 — Variables of Equation 22

Table 36 — Variables of Equation 23

Table 37 — Variables of Equation 24

Table 38 — Variables of Equation 25

Table 39 — Variables of Equation 26

Table 40 — Variables of Equation 27

Table 41 — Variables of Equation 28

Table 42 — Variables of Equation 29

Table 43 — Mechanical inlet filter sized by the roof area

Table 44 — Variables of Equation 30

Table 45 — Polishing filter recommendation by target quality class

Table 46 — Sizing of the first flush in the tutorial project

Table 47 — Variables of Equation 31

Table 48 — The two efficiencies of the pumping chain and what each one converts

Table 49 — Variables of Equation 32

Table 50 — Variables of Equation 33

Table 51 — Variables of Equation 34

Table 52 — Variables of Equation 35

Table 53 — Variables of Equation 36

Table 54 — Fallback values adopted when the project does not declare them

Table 55 — Variables of Equation 37

Table 56 — Annual energy of six generic pressure pumps (illustrative curves, no brand) in the tutorial direct pressurisation, with the toilet flow limiting the pump flow

Table 57 — Variables of Equation 38

Table 58 — Variables of Equation 39

Table 59 — Variables of Equation 40

Table 60 — Coding and application of each minimum-charge regime in the calculation of the bill

Table 61 — Variables of Equation 41

Table 62 — Parts of the annual running cost and the origin of each one

Table 63 — Variables of Equation 42

Table 64 — Variables of Equation 44

Table 65 — Variables of Equation 45

Table 66 — Building life cycle modules and what the program's assessment covers in each one

Table 67 — Variables of Equation 46

Table 68 — Mass per useful cubic metre of each tank material

Table 69 — Carbon inventory of the final tutorial project, item by item, with the share of each component in the embodied carbon; negative annual values are credits (illustrative grid and water factors, not measured values)

Table 70 — Variables of Equation 47

Table 71 — Variables of Equation 48

Table 72 — Variables of Equation 49

Table 73 — Variables of Equation 50

Table 74 — Variables of Equation 51

Table 75 — Options of LEED v5 credit WEc2 to which rainwater harvesting contributes

Table 76 — The eight decision criteria, their dimension, the direction of preference and the definition the program uses

Table 77 — Variables of Equation 52

Table 78 — Variables of Equation 53

Table 79 — TOPSIS closeness score with the four dimensions weighted equally and first-rank acceptability in SMAA-VIKOR, with 5,000 vectors of eight criterion weights drawn with 25% expected on each dimension, for the tutorial volumes

Table 80 — Choice band of each method for the tutorial volumes: the volumes whose index lies within 5% of the range of the index, counted from the best; TOPSIS, VIKOR and PROMETHEE II with the four dimensions weighted equally

Table 81 — Variables of Equation 54

Table 82 — Where the multi-criteria weights and the criterion shares are declared

Table 83 — Variables of Equation 56

Table 84 — The same tutorial project simulated in New York, London and Cape Town

Table 85 — Ratio between the wettest and the driest month in the three cities

Table 86 — The six tariff block codes and the effect of each one on the bill

Table 87 — The six tariff regimes and what happens when saving in each one

Table 88 — Effect of the water saving on the bill in two opposite tariff regimes (hypothetical structures, in currency units)

Table 89 — The three ways of comparing alternatives depending on what varies between them

Table 90 — Subcommands of the command line and the purpose of each one

Table 91 — Potential, net present value and payback of the final tutorial project with each assumption varied alone, from the low to the high value (costs are illustrative, not market prices)

Table 92 — Reading the SMAA-VIKOR acceptability of the winning volume

Table 93 — Legacy-format data recovered by the import

Table 94 — Export formats and the purpose of each one

Table 95 — Spreadsheet export options and when to use each one

Table 96 — Characteristics of the New York precipitation series used in the tutorial

Table 97 — The three ways of applying the first flush

Table 98 — State of the tutorial project at the end of defining the rain and the catchment

Table 99 — State of the tutorial project at the end of defining the demand

Table 100 — Comparison between the annual rainwater supply and the suppliable demand

Table 101 — Result of the first tutorial simulation, with a 3,000 L tank

Table 102 — Classification of each day of the simulation by the degree of supply

Table 103 — State of the tutorial project after the first simulation

Table 104 — Volume sweep of the tutorial project, with the marginal gain of each added cubic metre

Table 105 — Marginal saving gain for each cubic metre added to the tank

Table 106 — Indicators of the ideal volume obtained with the 1 $\%/m^3$ threshold adopted in the tutorial

Table 107 — Ideal volume obtained with each marginal-gain threshold, for the same project

Table 108 — Cost and performance compared between the ideal volume and the largest volume swept (prices are illustrative, not market prices)

Table 109 — State of the tutorial project after choosing the volume

Table 110 — The three supply arrangements and what each one adds to the project

Table 111 — Single tank compared with two tanks, keeping the same total storage (energy cost is illustrative, not a market price)

Table 112 — Effect of the pump trigger level on the saving potential and on the number of starts

Table 113 — State of the tutorial project after the decision on the upper tank

Table 114 — Treatment line by disinfection technology adopted: stages, ultraviolet energy and annual carbon

Table 115 — Fine-filtration recommendation by quality class

Table 116 — Mechanical inlet filter sized by the roof area

Table 117 — State of the tutorial project after defining the quality class

Table 118 — Make-up of the New York water and sewer bill before and after the rainwater system

Table 119 — Economic indicators of the tutorial project over twenty years of analysis (all costs are illustrative, not market prices)

Table 120 — The six tariff regimes and the effect of each one on the saving

Table 121 — Make-up of the initial investment of the tutorial project (illustrative, not a market price)

Table 122 — What a new project of the International Edition contains, and what is left for you to enter

Table 123 — Where each part of the running cost comes from in the International Edition

Table 124 — Effect of the three illustrative maintenance routines on the running cost in the summary and on the result of the tutorial (illustrative costs, not market prices)

Table 125 — Assumptions of the economic projection and the weight of each one in the result

Table 126 — State of the tutorial project after the economic analysis (illustrative, not a market price)

Table 127 — Carbon balance of the tutorial project with a concrete cistern (illustrative factors)

Table 128 — Net carbon emissions of the tutorial project according to the tank material (prices are illustrative, not market prices)

Table 129 — Effect of the concrete cistern volume on the net carbon emissions

Table 130 — Effect of switching from concrete to polyethylene on the three dimensions of analysis (illustrative, not a market price)

Table 131 — State of the tutorial project after the environmental analysis (illustrative, not a market price)

Table 132 — The eight multi-criteria criteria, their dimension and the direction of preference of each one

Table 133 — Multi-criteria decision matrix: the eight criteria of each candidate volume, as the program computes them (costs are illustrative, not market prices)

Table 134 — Winning volume under each dimension taken alone, and the TOPSIS choice band with the four dimensions together

Table 135 — TOPSIS choice band (the volumes within 5% of the score range, counted from the highest score) according to the dimension given the dominant weight (70% on it, 10% on each of the other three), with the highest score, the runner-up and the score margin between them

Table 136 — The same with the share of storage efficiency set to zero, so that the technical dimension measures volumetric reliability alone

Table 137 — Declared equal weights and the objective weights the CRITIC method computes from the seven volumes, summed per dimension, with the TOPSIS choice band each gives

Table 138 — Summary of the tutorial project, with all the parameters and results

Table 139 — Variables of Equation 57

Table 140 — Physical input validation messages and the action for each one

Table 141 — Suppliable fraction messages and the action for each one

Table 142 — Precipitation series error messages and the action for each one

Table 143 — Volume sweep error messages

Table 144 — Chlorination parameter error messages

Table 145 — Economic analysis error messages and the action for each one

Table 146 — Multi-criteria decision error messages and the action for each one

Table 147 — Pump set parameter error messages

Table 148 — Error situations when reading and saving files

Table 149 — Warnings that do not stop the calculation and must be stated in the study

Table 150 — **Table 99** — Overview of the published versions

Table 151 — Fixes that change results in version 0.2.0

Table 152 — Fixes that change results in version 0.1.0

Table 153 — Items planned for version 1.1

Table 154 — Items planned for version 2.0

Table 155 — The variables that probabilistic modulation can draw, with the screening distribution the screen proposes

Table 156 — What each economic and environmental variable does in the calculation, and what it does not touch

Table 157 — The four distributions the tool offers, their parameters and when to use each

Table 158 — The variables drawn in the tutorial example: declared distribution and statistics of the realisations

Table 159 — Results at the volume chosen by the tutorial study: deterministic study and statistics of the realisations (money in US$, illustrative, not a market price)

Table 160 — Probabilities at the chosen volume, with the Wilson 95% confidence interval

Table 161 — Frequency with which each volume is chosen in the realisations of the example, by criterion (%)

Table 162 — Sensitivity at the chosen volume: strength and direction of the influence of each drawn variable on the tutorial results

Table 163 — Share of the variance of the result explained by each drawn variable in the tutorial example, at the chosen volume (η^2; continuous variables grouped in deciles)

Table 164 — Project parameters: identification

Table 165 — Project parameters: rainfall

Table 166 — Project parameters: catchment

Table 167 — Project parameters: building

Table 168 — Project parameters: demand

Table 169 — Project parameters: irrigation

Table 170 — Project parameters: water quality

Table 171 — Project parameters: tanks

Table 172 — Project parameters: pump set

Table 173 — Project parameters: piping

Table 174 — Project parameters: investment

Table 175 — Project parameters: operation

Table 176 — Project parameters: tariffs

Table 177 — Project parameters: energy

Table 178 — Project parameters: financial

Table 179 — Project parameters: certifications

Table 180 — Project parameters: other

Table 181 — Emission factors that the user supplies, and what to declare for each

Table 182 — Emission factors of the tank materials, with mass and boundary

Table 183 — Reference recorded in the program for each tank-material factor, and its status

Table 184 — Emission factors of the treatment consumables

Table 185 — The block codes of the water tariff table

Table 186 — The four ways of entering the sewage charge

Table 187 — The six tariff regimes and what happens when saving

Table 188 — Tariff structure of the New York example

Table 189 — Tariff structure of the London example

Table 190 — Tariff structure of the Cape Town example

Table 191 — Rainfall series distributed with the International Edition

Table 192 — What the user supplies in the International Edition, and what happens without it

Table 193 — The worked examples of the International Edition: rainfall, currency and tariff structure

Table 194 — Example rainfall series of the International Edition: description and quality

Table 195 — Formats the program reads and where each one is loaded

Table 196 — Formats the program writes and where each one is generated

Table 197 — The seven sections of the project file and what each one holds

Table 198 — Location of the program's files and of the user's files

Table 199 — Sections of the estudo.json file (schema triton-estudo, version 1)

Table 200 — Aliases of the substitutions and the project field each one changes

Table 201 — Files that triton estudo run writes to the output folder

Table 202 — Compatibility between versions of the project file

Table 203 — Terminology for rainwater and stormwater

Table 204 — Fundamental quantities of the water balance and relations between fraction and potential

Table 205 — Reference sheet: the ten steps of a complete study and the section that deals with each one

Table 206 — Reference sheet: the ten design pitfalls and where each one is dealt with

Table 207 — Reference sheet: the six tariff regimes and the effect of saving

Table 208 — Reference sheet: the indicators and the question each one answers

Table 209 — The example cases and what each one demonstrates

Table 210 — Result each example case produces when reread and simulated

List of equations

Equation 1 — Mass balance closure

Equation 2 — Volume collected in the day

Equation 3 — Volume available before consumption

Equation 4 — Overflow volume

Equation 5 — Volume stored before consumption

Equation 6 — Rainwater volume consumed

Equation 7 — Volume left for the next day

Equation 8 — Potable mains top-up

Equation 9 — Classification of the day by supply

Equation 10 — The three parts of the daily demand

Equation 11 — Marginal gain per added cubic metre

Equation 12 — Ideal volume by the marginal-gain criterion

Equation 13 — Storage fraction

Equation 14 — Potable water saving potential

Equation 15 — Volumetric reliability

Equation 16 — Relation between potential and reliability

Equation 17 — Mean daily overflow

Equation 18 — Efficiency of use of the collected water

Equation 19 — Annual potable water volume saved

Equation 20 — Mean daily unmet demand

Equation 21 — Total annual precipitation, PRCPTOT

Equation 22 — Precipitation on very wet days, R95p

Equation 23 — Maximum one-day precipitation, RX1day

Equation 24 — Maximum five-day precipitation, RX5day

Equation 25 — Simple daily intensity index, SDII

Equation 26 — Days of heavy precipitation, R20mm

Equation 27 — Consecutive dry days, CDD

Equation 28 — Consecutive wet days, CWD

Equation 29 — Seasonality index, SI

Equation 30 — Mass of chlorine product per cubic metre

Equation 31 — Incremental investment of the treatment line

Equation 32 — Specific pumping energy

Equation 33 — Specific energy from the flow rate

Equation 34 — Pumping flow rate deduced from the power

Equation 35 — Energy used at start-ups

Equation 36 — Annual pump energy

Equation 37 — Annual energy of the pressure pump

Equation 38 — Monthly bill saving

Equation 39 — Exponential tariff formula

Equation 40 — Sewage part of the bill

Equation 41 — Total initial investment

Equation 42 — Cumulative inflation factor

Equation 43 — Number of tariff adjustments applied

Equation 44 — Cumulative tariff adjustment factor

Equation 45 — Net present value

Equation 46 — Embodied emission of a component

Equation 47 — Annual emission of the pumping energy

Equation 48 — Net annual emission balance

Equation 49 — Environmental payback time

Equation 50 — Carbon balance at the end of service life

Equation 51 — Specific emission per litre delivered

Equation 52 — lcow

Equation 53 — TOPSIS closeness coefficient

Equation 54 — pesos_dos_criterios

Equation 55 — critic_informacao

Equation 56 — critic_pesos

Equation 57 — Series transformation for comparison with another program

1. Start here

1.1. What Triton does, and what it does not

Triton simulates rainwater harvesting systems in buildings. Given the rainfall regime of a place, the roof of a building and the consumption of the people who use it, it answers **how much potable water the system replaces**, and at what cost, with what quality and with what carbon impact.

This section starts from the beginning, so the first two subsections deal with the object itself before dealing with the program. Readers who already design building water systems will find them elementary and can go straight to the six dimensions of analysis, which is where Triton appears; readers who are new to the subject will find there the vocabulary that the rest of the manual uses without explaining again.

1.1.1. What a rainwater harvesting system is

It is a system that **collects the rain falling on the roof and uses it instead of mains water**, for the uses that do not need potable water.

The idea is old and simple. What makes it difficult is one thing only: rain does not fall when you need it. That is why the system needs a tank, and that is why the size of that tank is the central question of every project — and of this manual. Figure 1 presents the components of the system and the path of the water, from collection to the point of use.

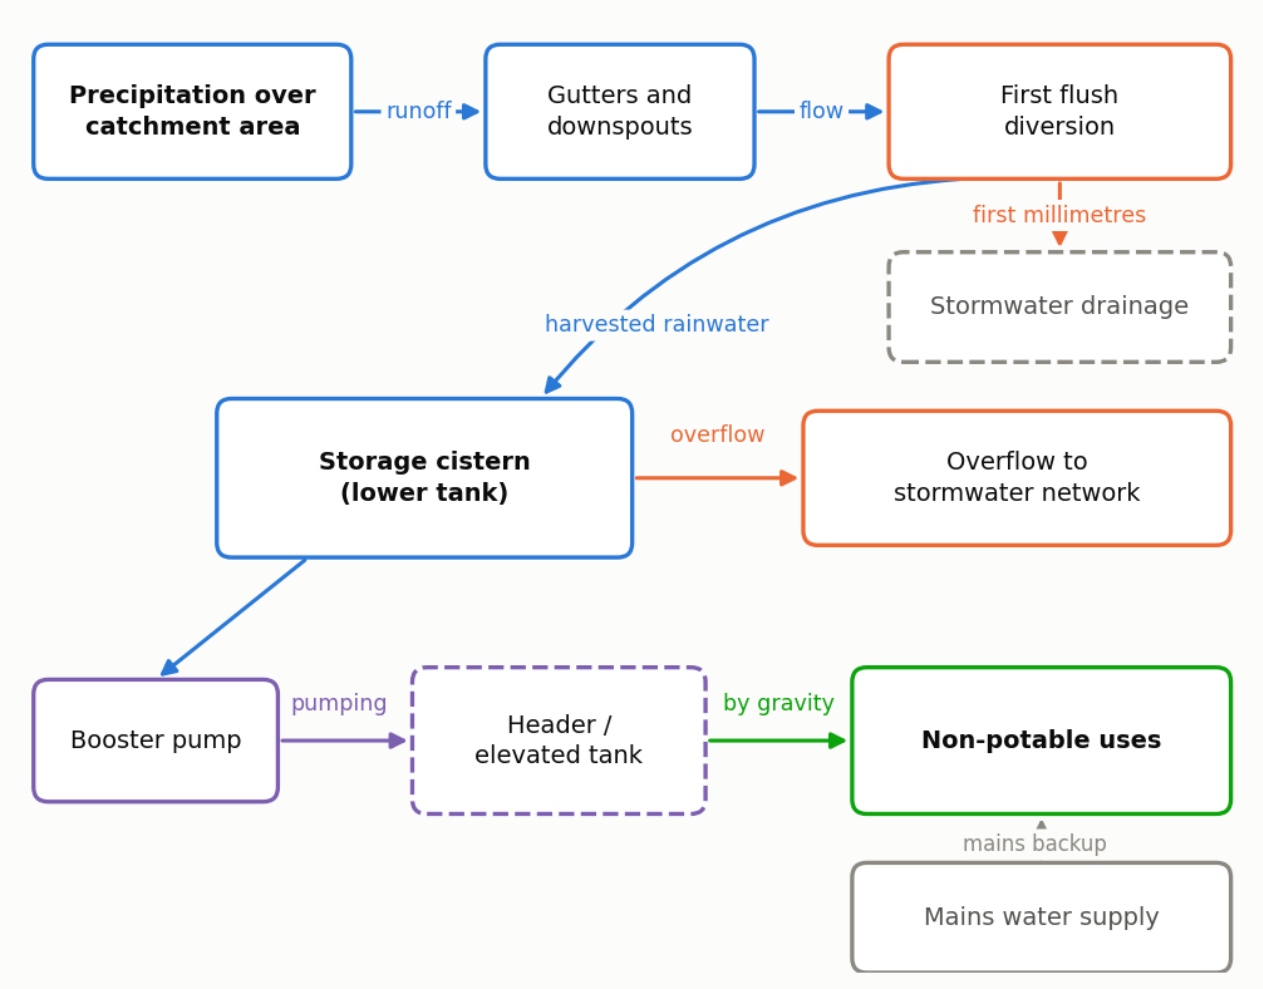


Figure 1 — Components of a building rainwater harvesting system and the path of the water, from collection to the point of use. The upper tank is dashed because it is optional: in a single-storey building the pump can pressurise the points of use directly, and the upper tank changes when water is supplied, not the volume available.

Following the drawing, from left to right:

The roof is the catchment area. What counts is the **horizontal projection** of the roof, not the sloping area: it is the roof's shadow on the ground that receives the rain. Getting this wrong is the first of the ten mistakes in section 5.1.

The gutters and downpipes carry the water to the cistern. The program does not size them; that is hydraulic design, and it follows the rainwater drainage standard that applies where the building stands.

The first-flush device diverts the first millimetres of each event, which carry the dust, leaves and bird droppings accumulated on the roof. It is the cheapest quality control measure, and section 4.6 shows how much it changes the water that reaches the tank.

The cistern, or lower tank, stores the collected water. When the inflow exceeds the capacity, the surplus **overflows** to the drainage system. This overflow is not waste through carelessness: it is the unavoidable consequence of storing a resource that arrives concentrated.

The pump and the upper tank distribute the water. In a single-storey building the pump can pressurise the points of use directly. In buildings of two or more storeys an elevated tank is usually adopted: the water is pumped up to it and distributed by gravity.

The non-potable uses are the destination: toilets and urinals, floor and vehicle washing, landscape irrigation. When rainwater is not enough, the **mains** supplies the rest, and supply is never interrupted.

The diagram of Figure 1 shows how the parts are linked, which is what matters to follow the calculation. It lacks, however, the information that settles half of the design questions: where each part sits in relation to the others, and at what height. The section of Figure 2 restores that geometry, because the difference in level is what determines whether water flows by gravity or needs a pump, and because the position of the cistern relative to the ground is a construction decision, not a calculation one.

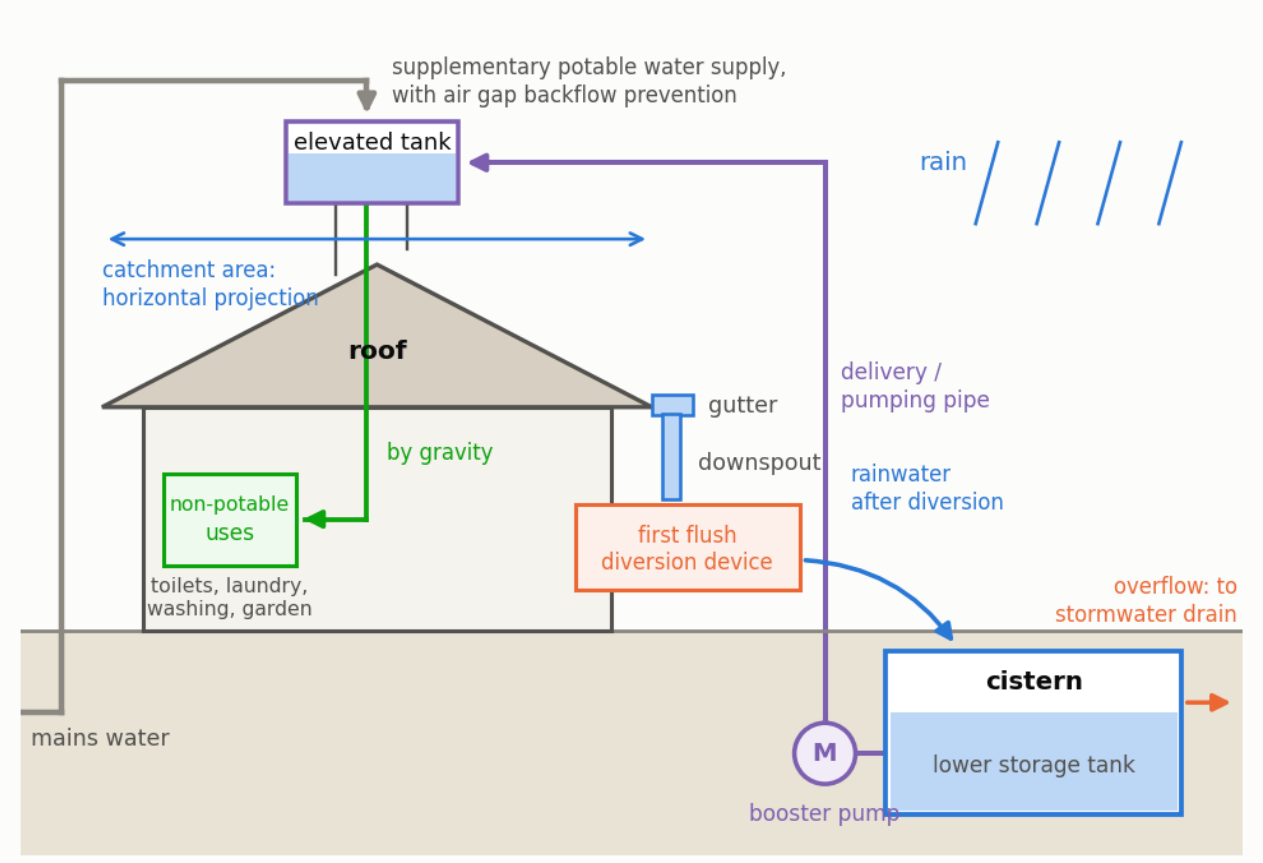


Figure 2 — The same system seen in section. The catchment area is the horizontal projection of the roof, not the sloping area of the roof. The elevated tank receives the water pumped from the cistern and returns it to the points of use by gravity; the mains feeds it, through an air gap, supplying the volume that rainwater does not cover. The cistern overflow carries the surplus to the drainage system.

> **Vocabulary the manual uses all the time.** *Cistern* and *lower tank* designate the same component. *Overflow* is the surplus volume that the overflow pipe carries to the drainage system. *Rainwater demand* is the part of the consumption that rainwater can supply; *total demand* is the whole consumption of the building. Appendix G has the complete glossary.

1.1.2. What the program calculates, in one day

The program does an inflow and outflow account, every day, for each day of the rainfall series. Figure 3 shows how the precipitation of one day is split, and the account is this:

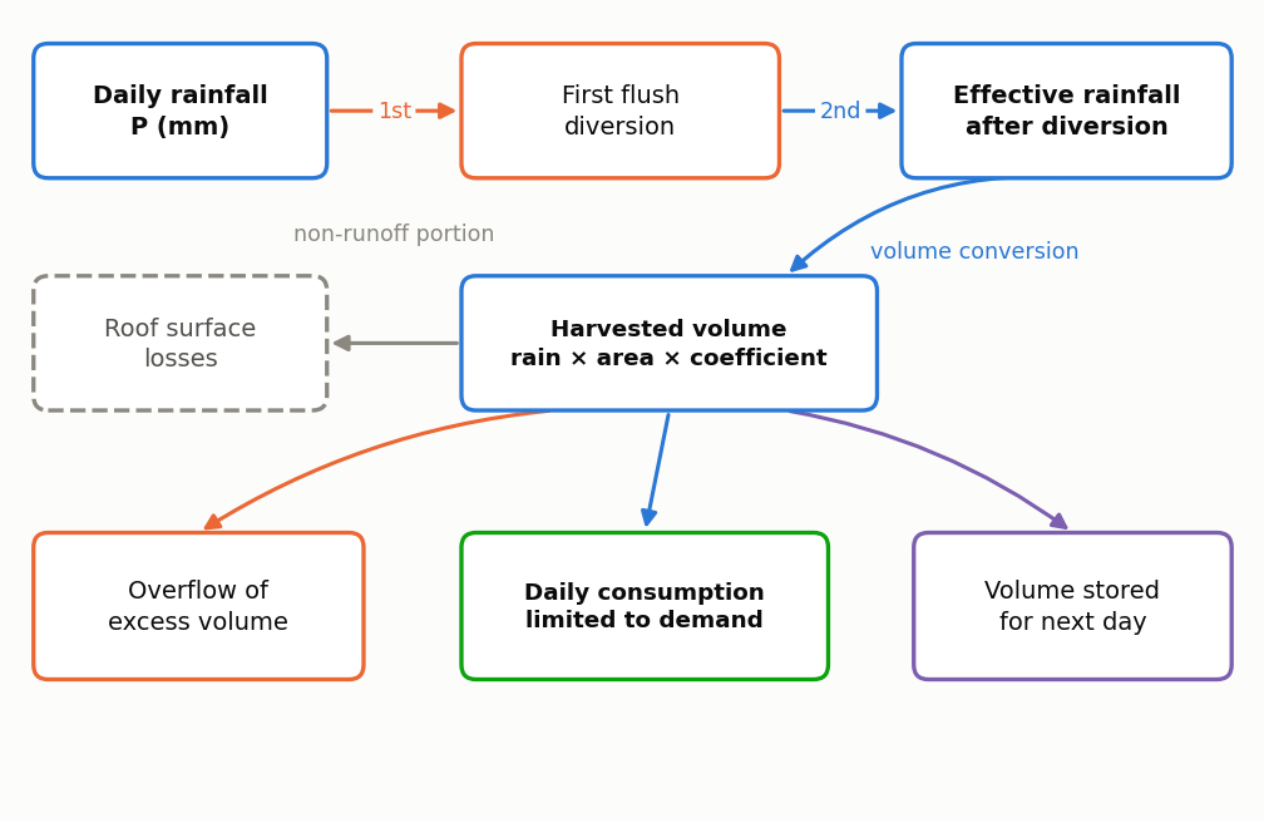


Figure 3 — Destination of the precipitation of one day. Each box is a part of the balance, and the sum of the overflow, the consumption and the stored volume equals the collected volume. The overflow is calculated before the day's consumption, and the day's rain can already supply the day's consumption: an order between the YAS and YBS rules, explained in the section on the daily balance.

Reading the drawing:

1. **The first flush is deducted.** With 12 mm of precipitation and a 2 mm first flush, 10 mm of effective precipitation remain.
2. **It is converted into volume.** Ten millimetres on 100 m² of roof, with a runoff coefficient of 0.85, give 850 litres. The calculation is `mm × m² × coefficient`, and it comes out directly in litres, because one millimetre on one square metre is exactly one litre.
3. **It is added to the volume stored in the cistern**, and whatever exceeds the capacity **overflows** to the drainage system.
4. **The day's consumption is withdrawn**, up to the rainwater demand.
5. **The remaining volume is carried to the next day** — and it is this dependence between consecutive days that makes a daily simulation necessary.

The five steps form a cycle, not a list: the volume left at the end of the fifth step is exactly the volume from which the third step starts on the next day. This link between one day and the next is the one thing that a calculation on the annual mean cannot reproduce, and it is the reason the simulation is daily. Figure 4 represents this sequence in the notation of the daily balance equations.

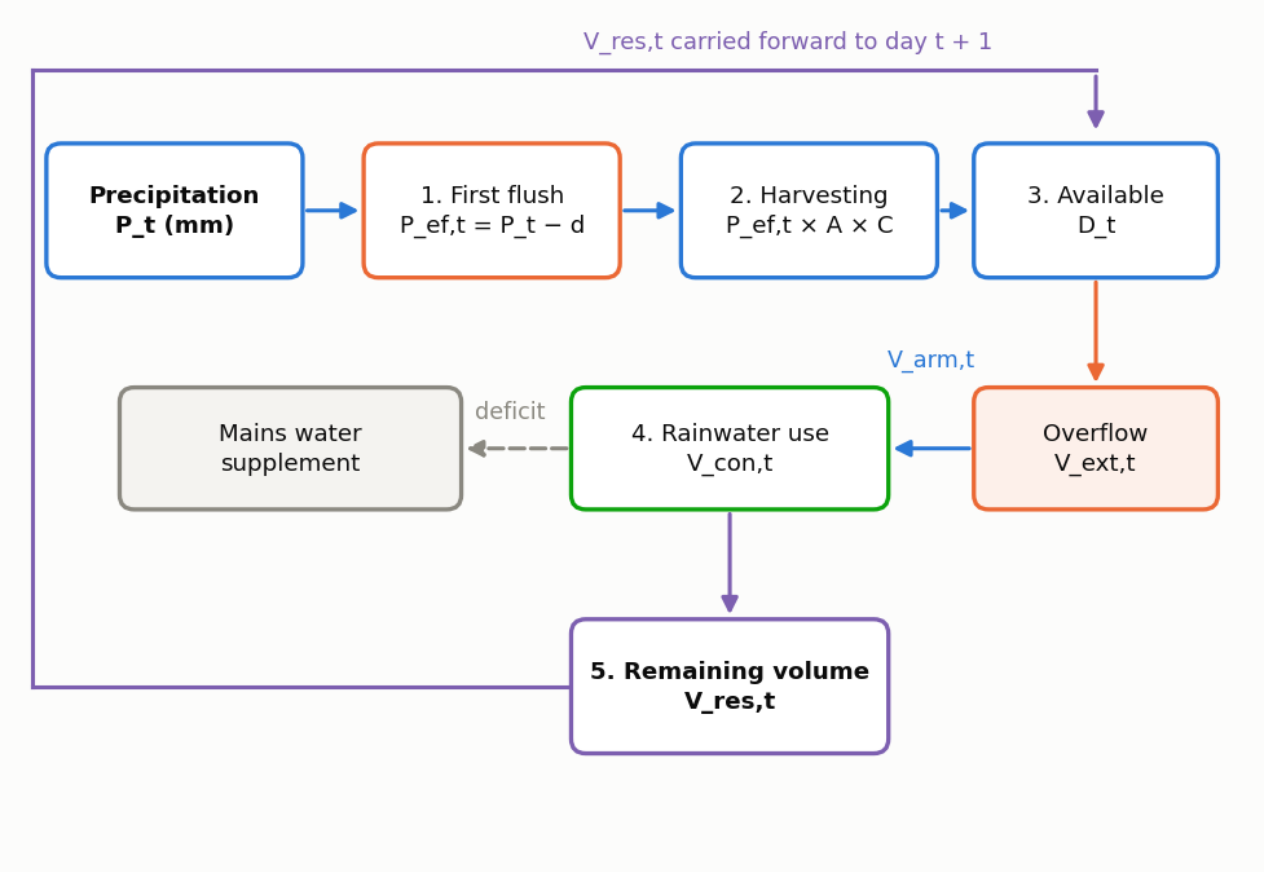


Figure 4 — Sequence of operations of the daily balance, in the order the program runs them, in the notation of the equations of the daily balance section. The purple link around the drawing represents the dependence between consecutive days: the remaining volume V_res,t is the starting volume of the next day.

> IN DEPTH · WHY THE ANNUAL MEAN IS NOT ENOUGH
>
> It is tempting to divide the annual rain by 365 and do the calculation in one go. The result is always optimistic, and sometimes very much so. The reason is that rain arrives **concentrated**: it fills the cistern in one day, overflows, and then is missing for two weeks. The mean represents neither the overflow nor the deficit, and both reduce the yield. Section 2.1 shows this happening in a ten-day table that you can redo in a spreadsheet, and section 4.4 shows the size of the error.

Repeated over thirty years of series, this calculation produces the program's central answer: the **potable water saving potential**, the fraction of the building's total consumption that rain managed to replace.

1.1.3. The six dimensions

The volume of water supplied is the first question of a project, but not the only one. The program assesses the system in six dimensions, which generally lead to different optimal volumes (Figure 5).

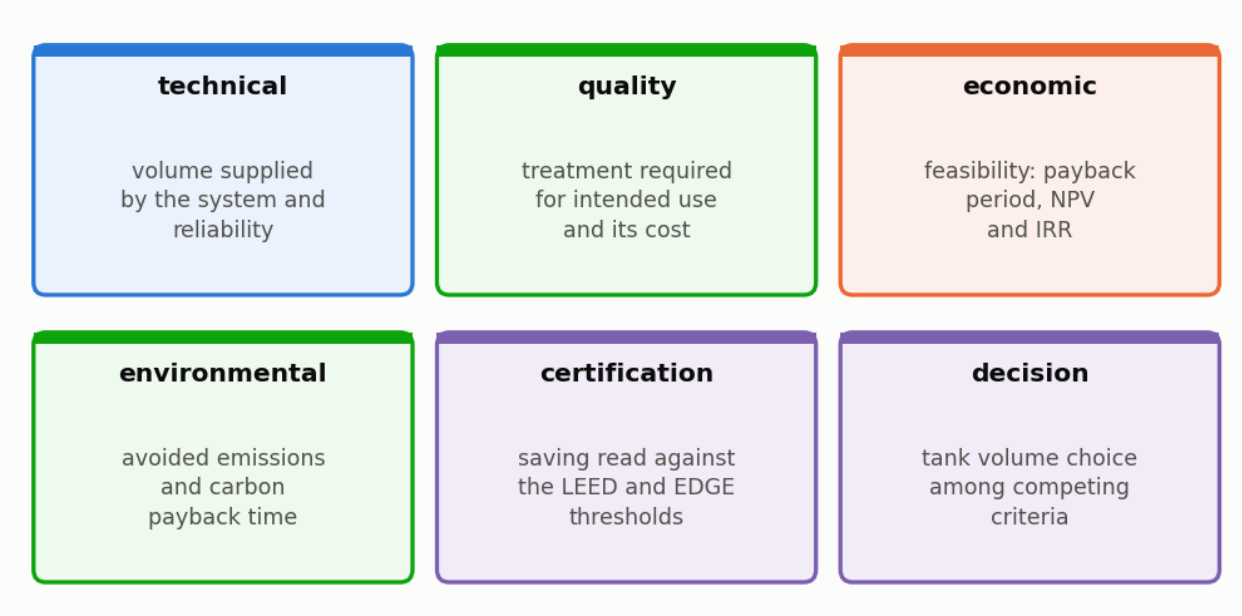


Figure 5 — The six dimensions of analysis and the question assessed in each one. The program goes through them in this order, and each one is treated in a section of its own in the method chapter.

Each dimension has its own treatment in the method chapter: the technical one in sections 2.1 to 2.4, quality in 2.5, economics in 2.7, the environment in 2.8, certification in 2.9 and the decision in 2.10.

The sixth dimension is what sets the program apart from a spreadsheet. The first five produce **diverging** results: the volume with the largest water saving is rarely the one with the best financial return, and neither is usually the one with the best environmental performance. The multi-criteria decision makes explicit the weights given to each criterion.

1.1.4. What the program does not do

Starting with the limits is unusual, and deliberate. It saves the time of anyone who opened the program expecting something else.

It does not size the plumbing. It does not calculate the routing, the diameter of each run or the slope of the network. The pump wizard estimates the diameter and the head loss of the rising main to select the equipment, but it does not replace the plumbing design; the diagram exported in DXF is a diagram, and the construction design belongs to the designer.

It does not detail the first-flush device. The program calculates the volume of the first-flush chamber, equal to the catchment area times the depth, and prices it with the leaf separator; the arrangement of the fittings, the purge and the connection to the drainage are separate hydraulic design.

It does not replace water quality testing. It sizes treatment equipment from assumptions. The constants of the roof wash-off model are not calibrated against measurements, and the resulting quality is an assumption, not a result.

It does not model an hourly sub-step. A 40 mm rain in two hours and the same depth over twenty-four hours give the same result.

It does not do a complete life cycle inventory. The assessment is a **screening** one, in a single impact category — carbon. There is no eutrophication, acidification, land use or toxicity.

It does not certify. It shows where the project would fit. Certification is decided by the certification body, with the complete documentation of the development.

It does not know the site. It does not know whether the volume fits on the plot, whether the water table is high, or whether the structure can carry the elevated tank.

Section 5.2 has the complete list of known limitations, with the consequences of each one.

1.1.5. Who it is for

The manual serves four reader profiles, with reading paths independent of one another (Figure 6).

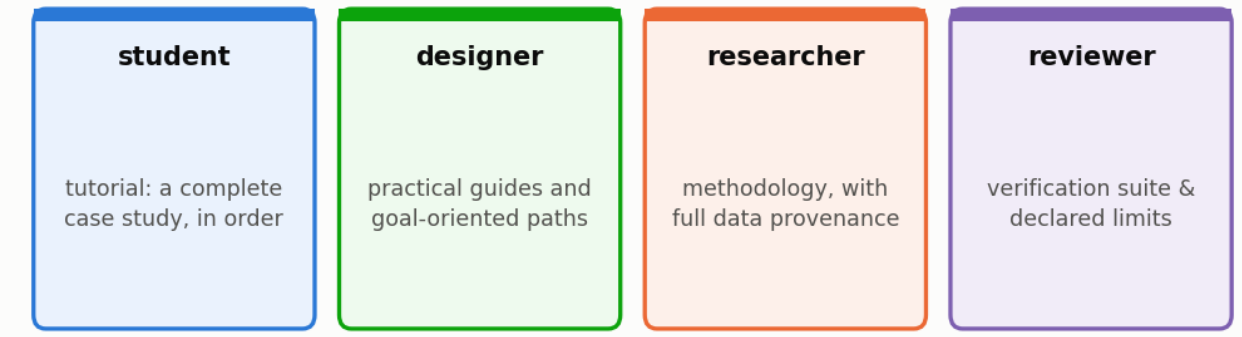


Figure 6 — The four reading paths of the manual. They are independent of one another, and the manual was organised so that each one can be followed on its own.

In section numbers: the student follows chapter 4, which is the tutorial from start to finish; the designer uses the guides of chapter 3 and the route of section 1.3; the researcher goes to the method of chapter 2; and the reviewer finds in chapter 5 the verification and the declared limits.

Anyone starting now should go through the whole of chapter 4, in the order in which it is written. It builds a project from scratch and follows it to the final decision, and each section ends by showing where the project has got to, so that the reader sees the study taking shape instead of receiving it finished.

1.1.6. How the engine is checked

Triton is a daily behavioural balance with six dimensions of analysis built around it. Section 5.3 describes how the engine is verified.

> **IN DEPTH · THE FIRST FLUSH IS SUBTRACTED, NOT USED AS A THRESHOLD**
> Some tools treat the first-flush depth as an **event threshold**: below it nothing is collected, above it the whole rain is collected. Triton **subtracts** the depth from each day's precipitation, which is physically more faithful. Anyone comparing results with another tool must declare which treatment each one uses, together with the search grid of the optimal volume, because either choice changes the result.

1.1.7. A word about results

Every number the program produces is **conditional on the declared assumptions**. It does not discover truths; it calculates consequences.

That is why the manual insists so much on declaration. Section 4.10 has the list of what must appear in a paper, section 5.1 has the ten mistakes the program does not prevent, and section 5.2 has what it does not cover.

A study that declares its assumptions and its limits is more useful — and more defensible — than one that presents a number on its own.

1.2. Installation and first run

> By the end of this section you will have the program installed, open, and a simulation finished with a result you can check against this manual.

1.2.1. What you need

Table 1 — System requirements to install and run the program

Requirement	What is needed
system	Windows 10 or 11, 64-bit
disk space	about 0.7 GB
memory	4 GB is enough; 8 GB makes the sweep more comfortable
privileges	administrator, to install for all users; without them, the installation goes to the user's folder

Nothing else needs to be installed. The program is distributed already assembled, with all the components it depends on to calculate, and does not require any prior installation of interpreters, libraries or auxiliary packages. Nor does it need an internet connection to work: everything it consults during a simulation is on the computer itself.

1.2.2. The edition

This is the International Edition (INT). It carries no rainfall, tariff, price, standard or emission factor of any one country: you enter those of your project, in the currency you choose. The blue badge at the top of the sidebar, the window title and the footer of every report and export say which edition the study came from.

Table 2 — What the International Edition brings and what it leaves to you

	International Edition (INT)
installer	`Triton_INT_Setup_1_0_0.exe`
language on opening	English
rainfall	your own series; three sample series (New York, London, Cape Town) ship with the program
water and sewage tariffs	typed in
electricity	typed in
currency and costs	no default currency: you choose it; costs typed in
grid and potable water emission factors	from the project's country, mandatory
certifications and incentives	LEED, EDGE
step 12	Probabilistic Modulation
cost of piping and labour	typed in
manual the program opens	this English manual
stored preferences	`Triton-INT`

Without the emission factors of the project's country, the program does not calculate the environmental assessment: a factor from the wrong grid would give a wrong result without any warning.

The method is the same whatever the country: the daily balance, the first flush, the runoff coefficients, the economic analysis and the life cycle assessment are one engine. What changes from one country to another is **data**, and the program leaves it to you. Where a requirement of a national standard matters, this manual describes it in general terms and asks you to check the standard that applies where the building stands.

1.2.3. Installation

1. Run `Triton_INT_Setup_1_0_0.exe`. The installer asks whether the installation is for all users, which requires administrator rights, or only for you.
2. Choose the installation language and read and accept the licence (academic source-available, non-commercial use).
3. Choose the installation type. The **standard** one brings the program, the manual, the cases, the examples and all the languages. The **custom** one lets you untick the Spanish and Chinese language packs.
4. Accept the suggested folder, `C:\Program Files\Triton International`, or choose another.
5. Tick, if you wish, **create a desktop icon**. The option **open .triton files with Triton** comes unticked, so as not to take over the project files of another Triton edition installed on the same computer; tick it if you want double-clicking a project to open it directly in the program.
6. When it finishes, the installer offers to open the program.

After that, the Start menu has two shortcuts: the program, and its manual in PDF (this English manual). To uninstall, use Windows *Apps and features*, as with any program; your projects stay where they were saved.

> **What the installer puts on the computer.** The program, the three sample rainfall series that come with the installation, the example files and this manual. Nothing is downloaded during use: Triton works without an internet connection.

1.2.4. Where your files go

The program never decides for you where to save. Every time you save a project, a report or an export, it asks for the folder.

Table 3 — File formats the program saves and the content of each one

What you save	Extension	Contains
project	`.triton`	all the input data **and the rainfall series**
report	`.pdf`	the complete document of the study
results	`.xlsx`, `.csv`	the tables, for a spreadsheet
diagram	`.dxf`	the schematic drawing, for CAD

Among these formats, `.triton` is the one that really matters to keep. It is self-contained: it carries the whole rainfall series inside it, and therefore opens on any other computer even without the files it came from. It is also the file to attach to a paper so that someone else can reproduce the study, and this property is what separates a verifiable piece of work from one that is merely reported.

1.2.5. The rainfall series

The program brings three long historical series ready to use — New York, London and Cape Town, 1991 to 2020, from the ERA5 reanalysis — and accepts any series of your own in CSV: daily precipitation in millimetres, one value per day, as appendix F describes. The sample series are reanalysis grid-point data, not rain-gauge records. They serve as examples and starting points; for a real project, use the series measured at the site.

1.2.6. The example files

The manual comes with ready-made projects that reproduce the results printed here.

Table 4 — Example files distributed with the program

File	What it is for
`manual\casos\01_tutorial_new_york.triton`	the project that chapter 4 builds, ready
`manual\casos\05_ten_days.triton`	the ten-day teaching case of section 2.1
`manual\casos\02_london.triton` and `manual\casos\03_cape_town.triton`	the same building in other cities
`examples\*.triton`	three complete studies: New York, London and Cape Town

They are in the program folder. Appendix J lists the ten cases of the manual, with the chapter of each one and the result they produce.

It is worth starting with the ten-day case. Open it, run the simulation and compare the result with the table printed in section 2.1. If the two match, the installation corresponds exactly to this manual; if they differ, the manual and the program are of different versions, and section 6.3 explains what to do in that case.

1.2.7. The first simulation, in five minutes

The program is organised in **steps**, in the left sidebar, in the order in which you work. For the first simulation four of them are enough.

1. **Project & Rainfall.** Load the file `NewYork.csv` that comes with the program. Enter a catchment area of 150 m^2, a runoff coefficient of 0.85 and a first flush of 2.0 mm.
2. **Building & Demand.** Choose a single-family house, 4 residents, 150 litres per person per day, and a rainwater-suppliable fraction of 28%.
3. **Tank & Costs.** Enter a fixed volume of 4,000 L.
4. Run it, and go to **Technical Results**.

You should get a saving potential of about **27%**.

Section 4.3 explains what this number means, and section 4.4 asks the next question: is 4,000 L the right volume?

1.2.8. If something goes wrong

The program does not open. Check that the installation finished without errors and reinstall over it; reinstalling keeps your files, because they are not in the program folder.

There is no list of cities. The program does not carry a rainfall database. Load one of the three sample series, or a rainfall file of your own.

Some part of the program is missing, such as the 3D volumetry. Run, in the Command Prompt, `"C:\Program Files\Triton International\Triton_INT.exe" --diagnostico` (with the default folder). The program lists what the installation contains: the 3D viewer, the sample rainfall series and the manual. Each item is marked OK or FALTA (missing). The list is also saved in `triton_diagnostico.txt`, in the Windows temporary folder. Send that file with the problem report.

The result does not match the manual. Check, in this order: the rainfall series loaded, the area, the coefficient, the first-flush depth, the demand and the rainwater-suppliable fraction. A difference in result is almost always a difference in input, and section 5.1 lists the most common mistakes.

An error message appeared. Section 6.2 has the program's messages, what each one means and what to do.

1.3. Where to start, depending on your goal

This manual brings together fifty-four sections in eight chapters, and it was not designed to be read from cover to cover. It works best as a reference work, in which each reader enters at the point that matches what they need to do, and this section exists precisely to show that entry point.

1.3.1. Route by goal

The table below lists the five most common purposes of people who open the program, with the reading path for each one.

Table 5 — Recommended reading path depending on the reader's goal

You want to	Read
learn to use the program	the whole of chapter 4, sections 4.1 to 4.10, in order
solve a case today	the three questions below, and then the guide of chapter 3 that fits
publish a study	chapter 2, which has the method, and section 4.10, with the declaration list
review someone else's study	chapter 5, and appendices A and B
export to CAD, BIM or a spreadsheet	section 3.9
avoid mistakes	section 5.1, with the ten most common mistakes

Anyone with an hour and no previous familiarity should read the tutorial of chapter 4. It builds a complete study around a single project, and each section ends by showing where that project has got to, so that the reader follows the construction instead of receiving the finished result.

1.3.2. The three questions that define a study

Even before opening the program, it is worth answering three questions, because they determine a good part of the later decisions and because answering them afterwards usually means redoing work.

1.3.2.1. Which uses will rainwater supply?

The answer defines the **rainwater-suppliable fraction**, and that fraction is the ceiling of everything else: a system whose fraction is 28% will never save more than 28% of the total consumption, however large the cistern and however much it rains. No later design decision changes this limit, which is why it deserves to be set before anything else. Figure 7 brings together the usual ranges of the suppliable fraction depending on the intended uses.

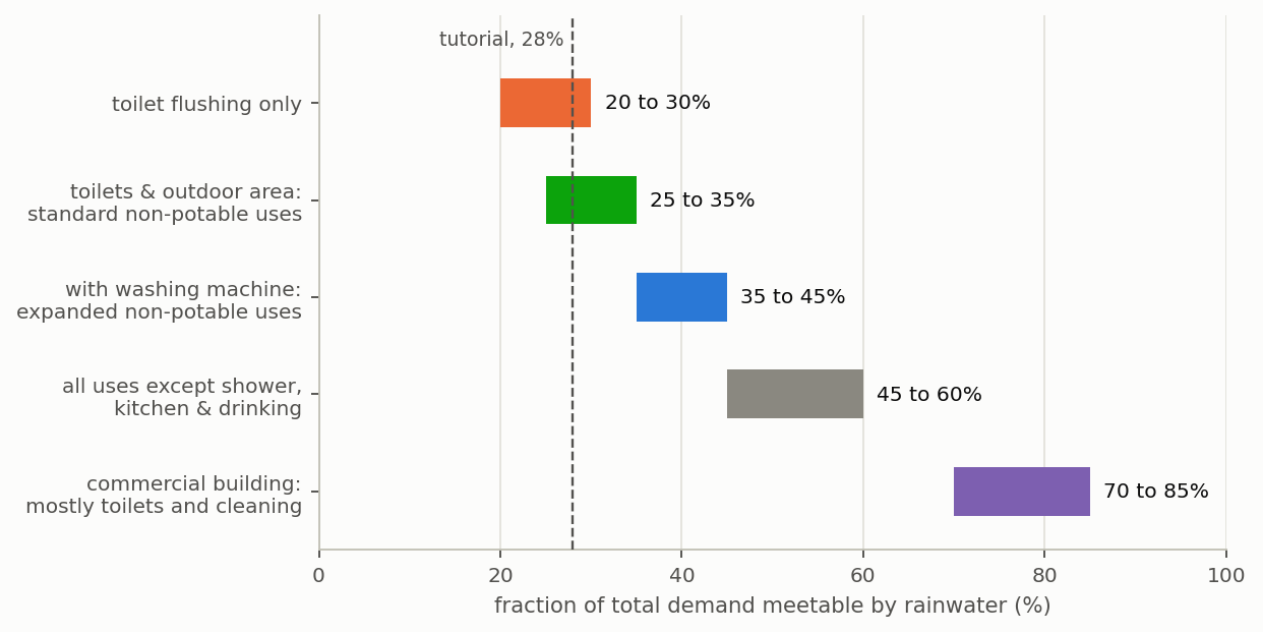


Figure 7 — Which part of the total consumption rainwater can supply, depending on the uses the project intends. It is the ceiling of the saving potential: no tank, however large, exceeds this fraction.

The residential cases are dealt with in section 4.2, and the commercial case in section 3.5. The dashed line marks the 28% of the tutorial, which keeps to the non-potable uses that rainwater guidance generally admits: toilet flushing, washing and irrigation.

1.3.2.2. Will you compare volumes or assess just one?

The distinction between assessing a known volume and looking for the right volume determines the simulation mode and, with it, the computing time and the richness of the result.

Table 6 — Choice between fixed volume and sweep depending on the question of the study

If you want to	Use	Where it is dealt with
assess a cistern that already exists	fixed volume	section 4.3
find out which volume to buy	**sweep**	sections 4.4 and 2.2
choose between criteria that disagree	sweep and multi-criteria	sections 4.9 and 2.10

The sweep is almost always the right answer. It costs more computing time, in the order of seconds, and it produces the curve of diminishing returns, which is the strongest argument any study can have when justifying a volume.

1.3.2.3. Is an upper tank needed?

The third question is hydraulic, and the answer depends on the height of the building and on the pressure required at the points of use.

Table 7 — Hydraulic criteria to decide on the upper tank

If the building	Then	Where it is dealt with
is single-storey and the points are close to the cistern	direct pressurisation, no tank	section 4.5
is a two-storey house or a multi-storey building	elevated tank, for **pressure**	section 4.5
needs a reserve against power cuts	elevated tank	section 4.5

> The elevated tank **does not increase** the water saving. Keeping the same total storage, it delivers slightly less and consumes pumping energy. The decision to adopt it must be hydraulic, and never based on the expectation of a larger yield.

1.3.3. The order of work in the program

The program's sidebar is numbered, and the numbering matches the order in which you work. The first four steps are data input, the next four show results, and the last four produce outputs or support the study (Figure 8).



Figure 8 — The twelve steps of the program, grouped by nature. The first four are input and must be filled in order, because each one uses what the previous one defined; the next four are for reading results; the last four produce outputs or give support, and can be used at any time.

Where this manual deals with each one: step 1 in section 4.1, step 2 in 4.2, step 3 in 4.6, step 4 in sections 4.3, 4.4 and 4.7, step 5 in 4.3, step 6 in 4.7, step 7 in 4.8, step 8 in 4.9, step 9 in 4.10, step 10 in 3.9 and step 12, Probabilistic Modulation, in sections 7.1 to 7.5. Step 11 is the documentation built into the program itself, and has no corresponding section here. The International Edition carries no tariff catalogue, so it has no tariff-manager step: you type the tariffs of your project in the economic step, and the numbering has no gap.

It is worth saving the project at the end of each step. The parameters of appendix A are saved and read back in full, and the resulting file is the documentary evidence of the study, both for whoever will redo it in the future and for whoever will assess it.

1.3.4. Before publishing

Three readings are mandatory for anyone who intends to publish results, and none of them is long. Section 4.10 has the list of what to declare in a paper, together with a method paragraph ready to adapt. Section 5.1 brings together the ten design mistakes that the program has no way of preventing. And section 5.2 lists the known limitations — of which it is worth reading not all, but those that affect the case in hand.

Appendix I condenses the three into one-page summaries, for quick reference.

2. The method

2.1. The daily water balance

> By the end of this section you will be able to redo, in a spreadsheet, exactly what Triton does on each day of the series, and to say why the program reached the number it reached.

> **Before you start.** Chapter 2 is the technical layer of the manual: it shows the calculations from the inside. You do not need it to use the program — chapter 4 is enough — but you do need it to **defend** a result, whether before an examining board, in a review or in front of a client who asked where the number came from.

This is the section on which all the others depend. The saving potential, the cash flow, the avoided emission and the multi-criteria ranking all come from the numbers the daily balance produces. Whoever understands this section understands the program.

Triton uses a **daily-step behavioural model**: for each day of the precipitation series, the program works out what enters the tank, what leaves it, what overflows and what stays stored. There is no probability distribution and no annual mean. There is the series, day after day, and the same calculation repeated.

2.1.1. The order of operations

For each day `t`, the program always runs, in this order:

1. **decides whether to divert** the first flush, according to the chosen mode;
2. **converts the depth into collected volume**, with the area and the coefficient;
3. **adds it to what was left from yesterday** and checks the overflow;
4. **supplies the rainwater demand** with what is stored;
5. **splits** the supply between indoor use and irrigation;
6. **tops up with mains water** what the rain did not supply;
7. **classifies** the day as one of full, partial or no supply.

The order is not arbitrary, and swapping two steps changes the result. Item 2.1.4 returns to this.

2.1.2. The worked case

Ten days, one house, no upper tank. The numbers were chosen to fit in a spreadsheet.

Table 8 — Input data of the ten-day worked case

Input	Value
catchment area	100 m²
runoff coefficient	0.85
first-flush depth	2.0 mm, at every event
total demand	200 L/day
fraction suppliable by rainwater	40% = 80 L/day
lower tank volume	2,000 L
upper tank	none
rainfall	New York, 21 to 30 September 2018 (ERA5 reanalysis)

The ten-day rainfall series, in millimetres:

Table 9 — Precipitation series of the ten days of the worked case (New York, September 2018)

Day	1	2	3	4	5	6	7	8	9	10
Rain	0.0	2.4	1.9	0.0	59.8	9.2	5.5	32.9	0.0	0.0

Without outdoor demand, the daily rainwater demand is the indoor demand times the indoor non-potable fraction, which here coincides with the total suppliable fraction: 200 × 0.40 = **80 L/day**. That is the volume the system tries to deliver every day.

2.1.2.1. The table, day by day

Table 10 — Daily water balance of the worked case, day by day, with collection, consumption, overflow and storage

Day	Rain	First flush	Effective rain	Collected	Rainwater demand	Consumed	Overflowed	In the tank	Supply
	mm	mm	mm	L	L	L	L	L	
1	0.0	0.0	0.0	0	80	0	0	0	none
2	2.4	2.0	0.4	34	80	34	0	0	partial
3	1.9	1.9	0.0	0	80	0	0	0	none
4	0.0	0.0	0.0	0	80	0	0	0	none
5	59.8	2.0	57.8	4,913	80	80	2,913	1,920	full
6	9.2	2.0	7.2	612	80	80	532	1,920	full
7	5.5	2.0	3.5	298	80	80	218	1,920	full
8	32.9	2.0	30.9	2,626	80	80	2,546	1,920	full
9	0.0	0.0	0.0	0	80	80	0	1,840	full
10	0.0	0.0	0.0	0	80	80	0	1,760	full
sum				**8,483**		**514**	**6,209**	1,760	

Table 11 — Check of the mass balance closure over the ten days

Closure check	Litres
collected in the period	8,483
minus the overflow	−6,209
minus the consumption	−514
minus what stayed in the tank	−1,760
residual	**0**

Table 12 — Indicators of the ten-day worked case

Ten-day indicator	Value
potable water saving potential	25.7%
daily mean of rainwater consumed	51.4 L/day
daily mean of potable water consumed	148.6 L/day
daily mean overflow	620.9 L/day
days of full supply	60%
days of partial supply	10%
days of no supply	30%

2.1.3. Reading the table

Five things happen in these ten days, and each one teaches a rule of the program.

2.1.3.1. Day 1: empty tank

The simulation starts with the tank **empty**. There is no rain on day 1, nothing is stored, and the 80 L of rainwater demand are not met by a single drop: the day is one of **no** supply, and the 200 L of the whole day come from the mains.

This is not a defect of the chosen series. It is the initial condition of the model, and it matters: in short series, the first days penalise the result. With thirty years of series the effect disappears; with ten days, it is one of the reasons the potential obtained, 25.7%, falls so far below the suppliable fraction of 40%. Days 3 and 4 add two more days of no supply.

2.1.3.2. Days 2 and 3: the first flush at work

On day 2 it rained 2.4 mm. After the 2.0 mm first flush, 0.4 mm remain, which on 100 m² at a coefficient of 0.85 give 34 L. All 34 L are consumed, and the day is one of **partial** supply: 34 L of the 80 L wanted.

On day 3 it rained 1.9 mm, less than the first-flush depth of 2.0 mm. The program does not subtract 1.9 and collect zero: it **diverts the whole day**.

> **Warning.** When the first-flush rule applies and the day's rain does not exceed the depth, the **whole** day is lost, not the difference. The calculation is `P_ef = P - d_f` when `P > d_f`, and **zero** otherwise.

The reason is physical: the diversion device has to fill before the water reaches the cistern. If the rain does not fill the device, nothing passes. In climates of light, frequent rain, this weighs far more than intuition suggests: in the New York series of the tutorial, 17% of the days are below the first-flush depth, and that is why the first-flush mode deserves attention in section 4.1.

> **A note for those who compare tools.** Some simulation tools treat `d_f` as an **event threshold**: below it nothing is collected, above it the **whole** rain is collected, without subtraction. Triton subtracts the depth. The difference is deliberate, it lowers the estimated saving, and studies comparing the two rules must declare it. Section 6.1 deals with the comparison.

2.1.3.3. Day 5: overflow comes before consumption

It rained 59.8 mm. After the 2.0 mm first flush, 57.8 mm of effective rain remain, which on 100 m² at a coefficient of 0.85 give 4,913 L collected.

The tank was empty. The tank holds 2,000 L, so **2,913 L overflow**. Only after that does the program withdraw the 80 L of demand, leaving 1,920 L for the next day.

> **Warning.** This order defines the model. The overflow is calculated **before** the demand is withdrawn, as in the **YAS** rule (*yield after spillage*), but the day's own rain can already supply the day's demand, as in the **YBS** rule. Triton therefore sits between the two, and the subsection «YAS, YBS and Triton's order», further on, shows why.
>
> If consumption came before the overflow, the tank would accept water that would physically have overflowed already, and the program would overestimate the yield. The difference shows up precisely on days of heavy rain, which are those that weigh most in the annual total.

Day 6 follows the same rule: the tank holds 1,920 L, receives 612 L, and 532 L overflow. On day 7 the tank is already full, and 218 L of a 298 L collection overflow.

2.1.3.4. Day 8: a tank too small for the event

It rained 32.9 mm, and the system collected 2,626 L. The tank was already at 1,920 L and holds 2,000. **2,546 L overflowed**, nearly the whole collection.

In a single day, the system threw away the equivalent of almost thirty-two days of rainwater demand. It is the portrait of the mismatch between the rain, which arrives concentrated, and the demand, which is constant. Enlarging the tank recovers part of it, and that is exactly the question the volume sweep of section 2.2 answers. Figure 9 sums up the ten days.

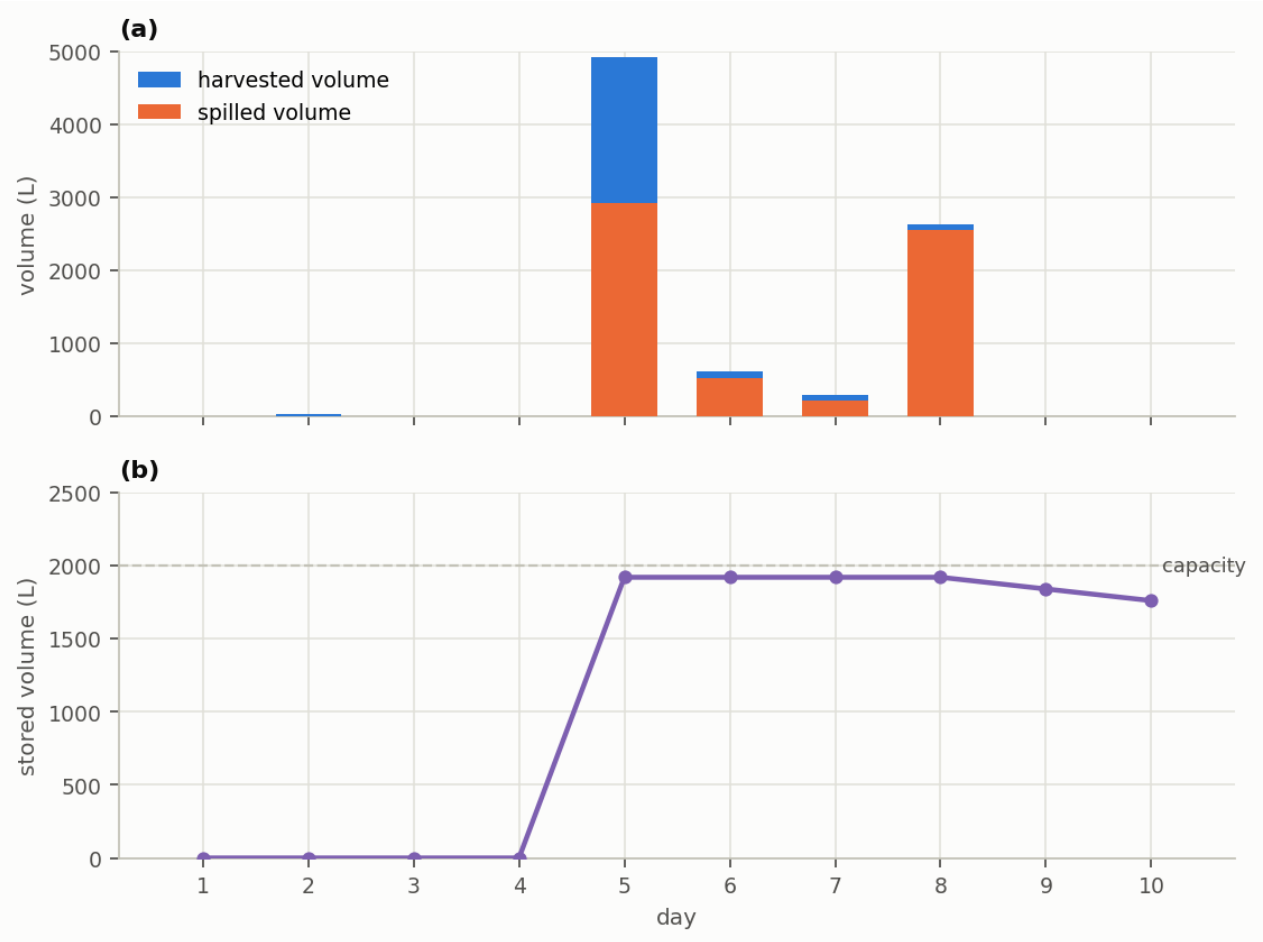


Figure 9 — The ten days of the worked case: (a) collected volume, in blue, and overflowed volume, in orange, by day: on day 8 the overflow almost equals the collection; (b) volume stored in the lower tank at the end of each day, after consumption, with the 2,000 L capacity dashed; on days 5 to 8 the tank reaches capacity, overflows and ends the day with 1,920 L.

2.1.3.5. The sum: the balance closes

The last row of the table and the check table show the closure:

$$V_{\mathrm{cap}} = V_{\mathrm{ext}} + V_{\mathrm{con}} + V_{\mathrm{res}} \tag{1}$$

Table 13 — Variables of Equation 1

Symbol	Meaning	Unit
`V_cap`	total volume collected in the period	L
`V_ext`	total volume overflowed in the period	L
`V_con`	total rainwater volume consumed in the period	L
`V_res`	volume left in the tank at the end of the period	L

In the ten days of the worked case, Equation 1 holds with 8,483 L collected, 6,209 L overflowed, 514 L consumed and 1,760 L left.

Zero residual. The program neither creates nor loses water, and this check is made automatically by the test suite at every change of the code, on ten-year series, with a residual of the order of 10^{-14} per cent of the collection.

2.1.4. The equations

The daily balance is written in five chained equations, which the program solves in this order for each day of the series. The notation follows that of section 4.1 for the collection part, and the index `t` always designates the current day of the simulation, so that `t-1` is the day immediately before.

2.1.4.1. The collected volume

Converting the precipitated depth into volume is the first operation of the day, and the simplest of all: the effective rain is multiplied by the catchment area and by the surface runoff coefficient.

$$V_{\mathrm{cap,\,t}} = P_{\mathrm{ef,\,t}} \times A \times C \tag{2}$$

Table 14 — Variables of Equation 2

Symbol	Meaning	Unit
`V_cap,t`	volume collected on day `t`	L
`P_ef,t`	effective rain on day `t`, after deducting the first-flush depth	mm
`A`	catchment area, in horizontal projection	m²
`C`	surface runoff coefficient of the roof	dimensionless

The result of Equation 2 comes out directly in litres, with no conversion factor, because one millimetre of depth over one square metre of surface is exactly one litre of water. It is the only dimensional simplification of the model, and it is exact.

2.1.4.2. The overflow and the storage

The volume available before any consumption is the sum of what was left in the tank at the end of the previous day and what was collected today, as in Equation 3. Two parts follow from that sum, calculated in this order: the surplus that does not fit in the tank and therefore overflows, and the volume actually stored.

$$D_{\mathrm{t}} = V_{\mathrm{res,\,t-1}} + V_{\mathrm{cap,\,t}} \tag{3}$$

$$V_{\mathrm{ext,\,t}} = \max\left(0;\, D_{\mathrm{t}} - V_{\max}\right) \tag{4}$$

$$V_{\mathrm{arm,\,t}} = \min\left(D_{\mathrm{t}};\, V_{\max}\right) \tag{5}$$

Table 15 — Variables of Equation 5

Symbol	Meaning	Unit
`D_t`	volume available on day `t`, before consumption	L
`V_res,t-1`	volume left in the tank at the end of the previous day	L
`V_cap,t`	volume collected on day `t`, from Equation 2	L
`V_ext,t`	volume overflowed on day `t`	L
`V_arm,t`	volume stored on day `t`, before consumption	L
`V_max`	useful capacity of the lower tank	L

The order in which Equations 4 and 5 appear defines the model. The overflow is calculated **before** the day's consumption is withdrawn, and that is why the program is usually described by the YAS rule, from *yield after spillage*. The description is approximate, and the next subsection says where it falls short. Reversing the order would make the tank accept, as consumption, water that would physically have overflowed already, and would overestimate the yield precisely on days of intense rain, which are those that weigh most in the annual total.

The difference between the two orders is invisible on most days and decisive on the few that matter. While the tank does not fill, overflowing before or after consuming gives exactly the same result, because there is no overflow at all; on days of intense rain, when the tank reaches capacity, the order determines whether a part of the water is counted as consumed or as lost. Those are precisely the days that weigh most in the annual total, and that is why a choice that looks like a formality shifts the whole result. Figure 10 compares the two sequences in the notation of the equations of this section.

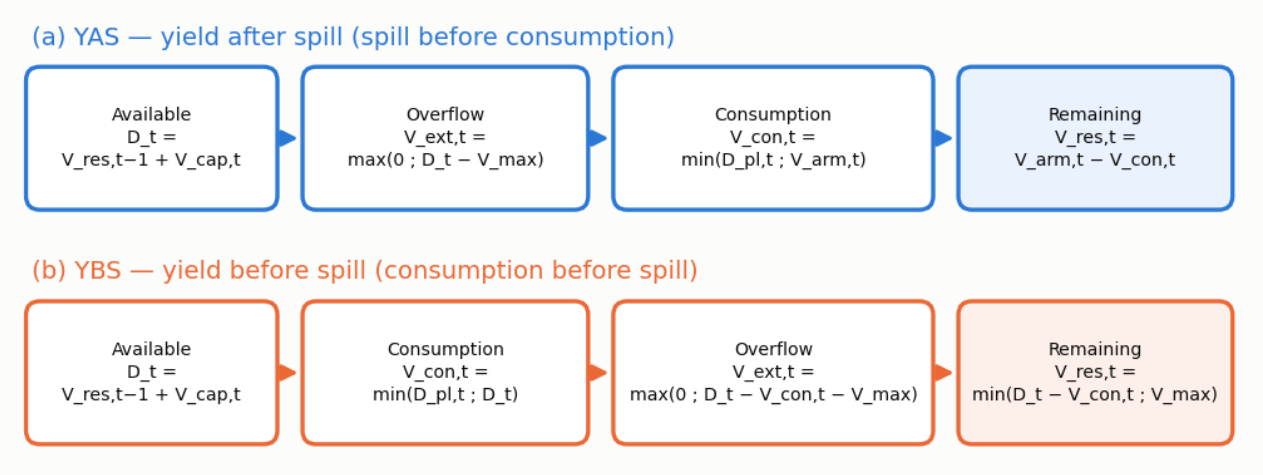


Figure 10 — Sequence of operations of the daily balance: (a) the order adopted by the program, with the overflow calculated before consumption; (b) the reversed order (YBS), with consumption withdrawn before the overflow. The two sequences only diverge on days when the tank reaches capacity, and YBS assumes a consumption before the day's rain, which overestimates the yield.

2.1.4.3. YAS, YBS and Triton's order

In the literature, YAS and YBS have a precise definition (Fewkes and Butler, 2000). With `Y_t` the volume withdrawn in the day, `Q_t` the collected volume, `S_t` the volume stored at the end of the day and `V_max` the capacity:

Table 16 — Withdrawal of the day and volume stored at the end of the day under strict YAS, strict YBS and in Triton

Rule	Withdrawal of the day	Stored at the end of the day
strict YAS	`Y_t = min(D_pl,t ; S_t-1)`	`S_t = min(S_t-1 + Q_t - Y_t ; V_max - Y_t)`
strict YBS	`Y_t = min(D_pl,t ; S_t-1 + Q_t)`	`S_t = min(S_t-1 + Q_t - Y_t ; V_max)`
Triton	`Y_t = min(D_pl,t ; min(S_t-1 + Q_t ; V_max))`	`S_t = min(S_t-1 + Q_t ; V_max) - Y_t`

Under strict YAS, the day's withdrawal comes only from what was stored the day before: today's rain only serves tomorrow. Under strict YBS, today's rain supplies the demand before the tank overflows. Triton does the overflow first, as YAS does, and then lets the day's rain, up to the capacity, supply the day's demand.

An inequality follows that holds for any series: the volume consumed by Triton is never smaller than that of strict YAS nor larger than that of strict YBS. The result lies **between the two**, closer to YAS for large tanks, where the previous day almost always suffices, and further from it for small ones, where the day's rain weighs. Anyone comparing Triton with a program or a standard that uses strict YAS should expect from Triton a slightly higher saving potential for the same volume.

The program keeps this order by decision: it keeps continuity with the earlier studies of the research group, and a change here would shift every published result.

2.1.4.4. Supplying the demand

Once it is established how much is in the tank, the program withdraws the smaller of the day's rainwater demand and the available volume, and passes on to the next day what is left.

$$V_{\mathrm{con,\,t}} = \min\left(D_{\mathrm{pl,\,t}}; V_{\mathrm{arm,\,t}}\right) \tag{6}$$

$$V_{\mathrm{res,\,t}} = V_{\mathrm{arm,\,t}} - V_{\mathrm{con,\,t}} \tag{7}$$

Table 17 — Variables of Equation 7

Symbol	Meaning	Unit
`V_con,t`	rainwater volume consumed on day `t`	L
`D_pl,t`	rainwater demand of day `t`, built as in section 4.2	L
`V_arm,t`	volume stored on day `t`, from Equation 5	L
`V_res,t`	remaining volume, carried to the next day	L

Equation 7 is what makes the daily simulation necessary and irreplaceable: it links each day to the next and makes the tank a memory of what happened before. No calculation based on monthly or annual means can represent this chaining, and the whole mismatch between the concentrated supply and the spread-out demand follows from it.

2.1.4.5. The mains top-up

What the rain did not supply is bought from the utility, and that part brings together three different origins.

$$V_{\mathrm{pot},\,\mathrm{t}} = D_{\mathrm{pot},\,\mathrm{t}} + \Delta D_{\mathrm{int},\,\mathrm{t}} + \Delta D_{\mathrm{irr},\,\mathrm{t}} \tag{8}$$

Table 18 — Variables of Equation 8

Symbol	Meaning	Unit
`V_pot,t`	volume of potable water consumed from the mains on day `t`	L
`D_pot,t`	demand that requires potable water by the nature of the use	L
`ΔD_int,t`	deficit of the indoor non-potable use, not met by the rain	L
`ΔD_irr,t`	irrigation deficit, **only** if the backup supply is on	L

The third part of Equation 8 deserves attention because it depends on a user choice. With the backup supply on, the mains comes to the rescue of irrigation on days when the cistern runs dry, and the deficit is met with potable water; with it off, the garden is simply not watered, the building does not buy that water, and the corresponding volume is counted as **unmet demand**, which is the third part of the demand balance dealt with later in this section.

2.1.4.6. Classifying the day

Finally, each day is classified by the degree of supply achieved, and it is from this classification that the percentages of days of full, partial and no supply reported in section 2.3 are calculated.

$$\mathrm{full} : V_{\mathrm{con},\,\mathrm{t}} = D_{\mathrm{pl},\,\mathrm{t}};\ \mathrm{partial} : 0 < V_{\mathrm{con},\,\mathrm{t}} < D_{\mathrm{pl},\,\mathrm{t}};\ \mathrm{none} : V_{\mathrm{con},\,\mathrm{t}} = 0 \tag{9}$$

Table 19 — Variables of Equation 9

Symbol	Meaning	Unit
`V_con,t`	rainwater volume consumed on day `t`	L
`D_pl,t`	rainwater demand of day `t`	L

In the equation, «full», «partial» and «none» are the three supply classes of a day. The comparison of Equation 9 is made with a tolerance of 10^{-5} L, not by exact equality. The reason is arithmetic, not conceptual: the balance works with floating-point numbers, and a difference of the order of the rounding error would classify as partial a day that was fully supplied.

2.1.5. The demand balance has three parts

The total demand of a day splits into three, not two:

$$D_{\mathrm{t}} = V_{\mathrm{con},\,\mathrm{t}} + V_{\mathrm{pot},\,\mathrm{t}} + V_{\mathrm{unmet},\,\mathrm{t}} \tag{10}$$

Table 20 — Variables of Equation 10

Symbol	Meaning	Unit
`D_t`	total demand of the building on day `t`	L
`V_con,t`	part supplied with rainwater	L
`V_pot,t`	part bought from the mains	L
`V_unmet,t`	part nobody supplied, that is, unmet demand	L

The three parts are the rainwater consumption, the mains consumption and the **unmet demand**. The third is zero in the default configuration, in which the mains comes to the rescue of irrigation on dry days. It stops

being zero when the user switches that rescue off, and then the program must show it: without it, the balance would close by construction, hiding the water nobody supplied.

2.1.6. With an upper tank

When the project has an upper water tank, step 4 changes. Instead of consuming directly from the lower tank, the program:

1. consumes from the upper tank what lies **above the trigger level**;
2. if something is still missing and there is water below, **starts the pump**: it transfers the smaller of what is in the lower tank and the free space above, and counts **one cycle**;
3. consumes again from what has just arrived;
4. repeats until the demand is met or the water runs out.

The trigger level is the reserve volume that is not consumed, and it serves to keep the pump from starting for every litre. It is capped at the volume of the upper tank: entering a trigger level larger than the tank does not make the program refuse it, it makes it adopt the full tank.

> **The upper tank does not increase the water saving.** It changes **when** the water is delivered, not **how much**. What it adds is cost: the investment in the tank and the pump, the pumping energy and the associated emission. Section 4.5 shows this with numbers.

The number of cycles and the volume pumped come from here and feed the energy calculation of section 2.6.

2.1.7. What the model does not represent

- **There is no hourly sub-step.** A 40 mm rain concentrated in two hours and the same depth spread over twenty-four hours produce the same result. For tanks very small relative to the catchment area, this underestimates the overflow.
- **There is no loss by evaporation or leakage** in the tank.
- **The initial condition is an empty tank.** In series shorter than one year, this penalises the result noticeably.
- **The runoff coefficient is single and constant.** It does not vary with the intensity of the rain or with the time since the last event.
- **In the balance, the first flush is a depth, not a device with its own dynamics.** The first-flush chamber is sized and priced by the volume `A × d_f` (section 2.5), but its emptying between events is not simulated: the depth is applied according to the chosen first-flush mode.

Section 5.2 brings together these and the other known limitations.

2.1.8. To check

The worked case of this section is in the file `05_ten_days.triton`, in the cases folder that comes with the program. Open it, run it, and compare with the printed table.

If any number differs, it is the manual that is out of date relative to the program. And in that case the automatic check will already have warned, because every number in this table has a corresponding assertion in the test suite described in section 5.3.

2.2. Ideal volume and the sweep

> This section formalises what section 4.4 did in practice: how the program builds the grid of volumes and how it applies the ideal-volume criterion.

2.2.1. The discrete grid

The sweep simulates a **finite** set of volumes, and building that set follows three rules.

The step is rounded up to a multiple of 250 litres. It is the commercial quantum: tanks are sold in standard volumes, and an optimum at 1,300 L cannot be bought. When the step asked for is not a multiple of 250, the program adjusts it and records the adjustment in `step_adjusted`, so that the report can declare the effective step.

The number of positive volumes is limited to 40. A sweep from 0 to 50,000 L with a 100 L step would be 500 thirty-year simulations, and the gain in information does not pay the cost. When the limit is reached, the effective step grows.

The maximum volume entered is always kept as the last point of the grid. Only the last interval can therefore be smaller than the effective step.

Volume **zero** enters the grid as the reference alternative: it is the no-system scenario, against which the others are compared.

The practical consequence appears in Figure 11. With a fine step, the curve shows the knee where the return starts to fall off; with a coarse step, the knee falls between two points of the grid and the criterion picks the first tabulated volume after it, which may lie several cubic metres beyond the volume that really matters.

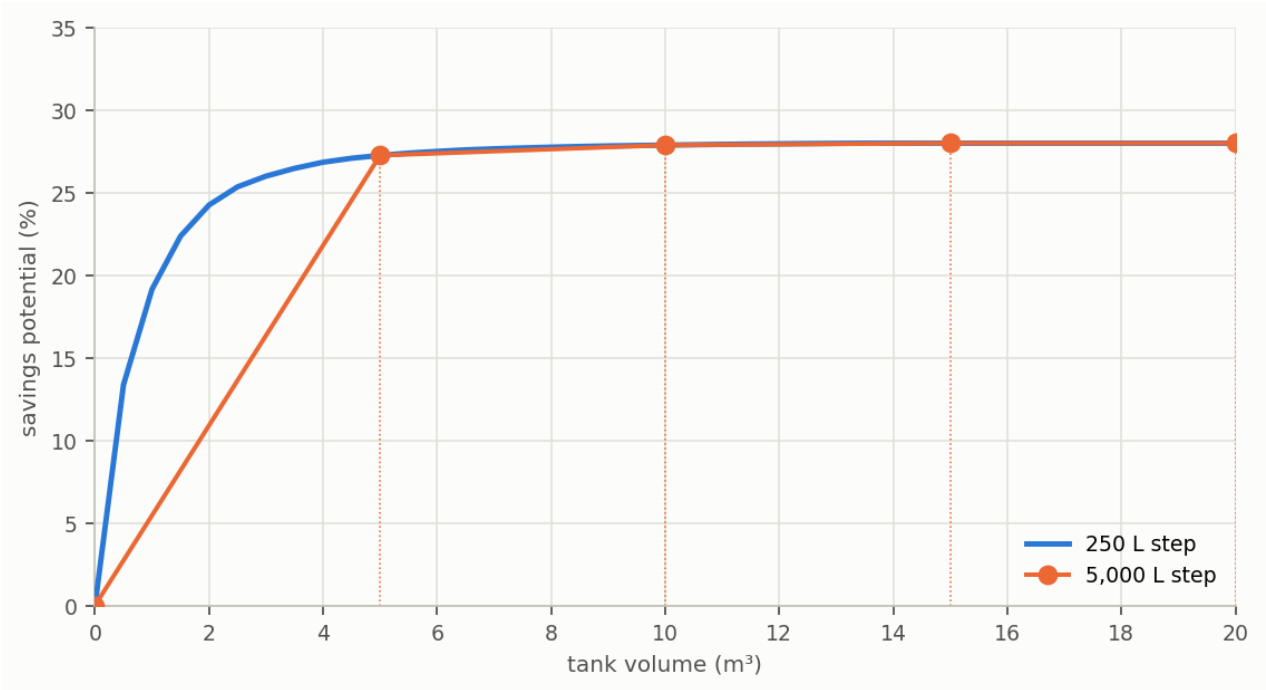


Figure 11 — Saving potential curve of the same building, swept with a 250 L step and with a 5,000 L step. The coarse grid calculates each point it contains correctly, but it does not contain the stretch of greatest curvature, between 1 and 5 m³.

2.2.2. The marginal gain

The curve of saving potential against volume is monotonic and concave: each cubic metre added to the tank yields less than the previous one, and the yield tends to zero as the system approaches the ceiling set by the suppliable fraction. The program quantifies this diminishing yield by the discrete derivative of the curve, calculated for each volume of the grid from the second one on.

$$\Delta(V_i) = [\mathrm{Epot}(V_i) - \mathrm{Epot}(V_{i-1})] \div [(V_i - V_{i-1}) \div 1000] \tag{11}$$

Table 21 — Variables of Equation 11

Symbol	Meaning	Unit
`Δ(V_i)`	marginal gain of volume `V_i` relative to the previous one	%/m³
`Epot(V_i)`	potable water saving potential obtained with volume `V_i`	%
`Epot(V_i-1)`	saving potential obtained with the next smaller volume	%
`V_i`	tank volume at position `i` of the grid	L
`V_i-1`	next smaller volume of the grid	L
`1000`	conversion from litres to cubic metres	L/m³

The division by one thousand in the denominator of Equation 11 is there so that the result comes out in percentage points per added cubic metre, which is the unit in which the decision is made — tanks are bought and priced in cubic metres, not in litres.

Being a discrete derivative, the marginal gain depends on the grid step. A fine grid produces a more local value, close to the true derivative at that point; a coarse grid produces the mean yield over a larger interval. The subsection on sensitivity to the step, further on, measures the size of that effect.

2.2.3. The ideal-volume criterion

The ideal volume is defined as the smallest positive volume of the grid whose marginal gain has already fallen below a threshold declared by the user.

$$V_{\mathrm{ideal}} = \min \left\{ V_i > 0 : \Delta(V_i) \leq \Delta \mathrm{lim} \right\} \tag{12}$$

Table 22 — Variables of Equation 12

Symbol	Meaning	Unit
`V_ideal`	ideal volume by the marginal-gain criterion	L
`V_i`	tank volume at position `i` of the grid	L
`Δ(V_i)`	marginal gain of volume `V_i`, from Equation 11	%/m³
`Δ_lim`	marginal-gain threshold declared by the user; the program opens with 5.0, and the tutorial adopts 1.0	%/m³

When no volume of the grid meets the condition of Equation 12 — which happens when the swept range ends before the curve flattens — the program adopts the largest volume of the grid and records that circumstance in the report, so that the reader knows that the optimum found is a limit of the search and not a turning point of the curve.

2.2.3.1. An example, step by step

The sweep table of the tutorial, in section 4.4, lets you redo the calculation by hand. Between 3,000 L and 4,000 L the potential rises from 25.99% to 26.83%, that is, 0.84 percentage points for one more cubic metre. Since 0.84 is below the 1.0 %/m³ threshold, and the previous gain, between 2,000 L and 3,000 L, was 1.75 %/m³, the first volume to cross the threshold is 4,000 L, and it is the ideal volume. With the looser threshold of 3 %/m³ the ideal volume would be 3,000 L (25.99%), and with the stricter 0.5 %/m³ it would be 5,000 L (27.24%).

Notice what happens further on. Between 6,000 L and 8,000 L the potential rises by 0.25 points, the same as in the previous interval, from 5,000 to 6,000 L, and yet the gain **per cubic metre** halves, from 0.24 to 0.13 %/m³, because the interval spans two cubic metres. That is why the criterion uses the gain per cubic metre, and not the gain between consecutive points of the grid: the latter depends on the step, and the former much less.

> **The criterion is hydraulic and only hydraulic.** It ignores cost, tariff and carbon. An ideal volume by this criterion is not a design recommendation; it is the point at which the yield curve stops paying off **in water**. Section 2.10 deals with the choice with the other criteria, which often point to different volumes.

This is one criterion among others equally defensible, and it is worth making that explicit. A designer who wants maximum water performance will choose the largest volume of the sweep; one answering for a budget will choose the volume with the largest net present value; the marginal-gain criterion lies between the two, as the one that identifies where the curve stops paying off. The three read the same sweep and need not coincide: in this project they point to three different volumes, and the maximum-performance one is the largest of the three. None of the three is wrong — what is wrong is not saying which one was used. Figure 12 marks the volume chosen by each criterion, with the value noted in the chart legend.

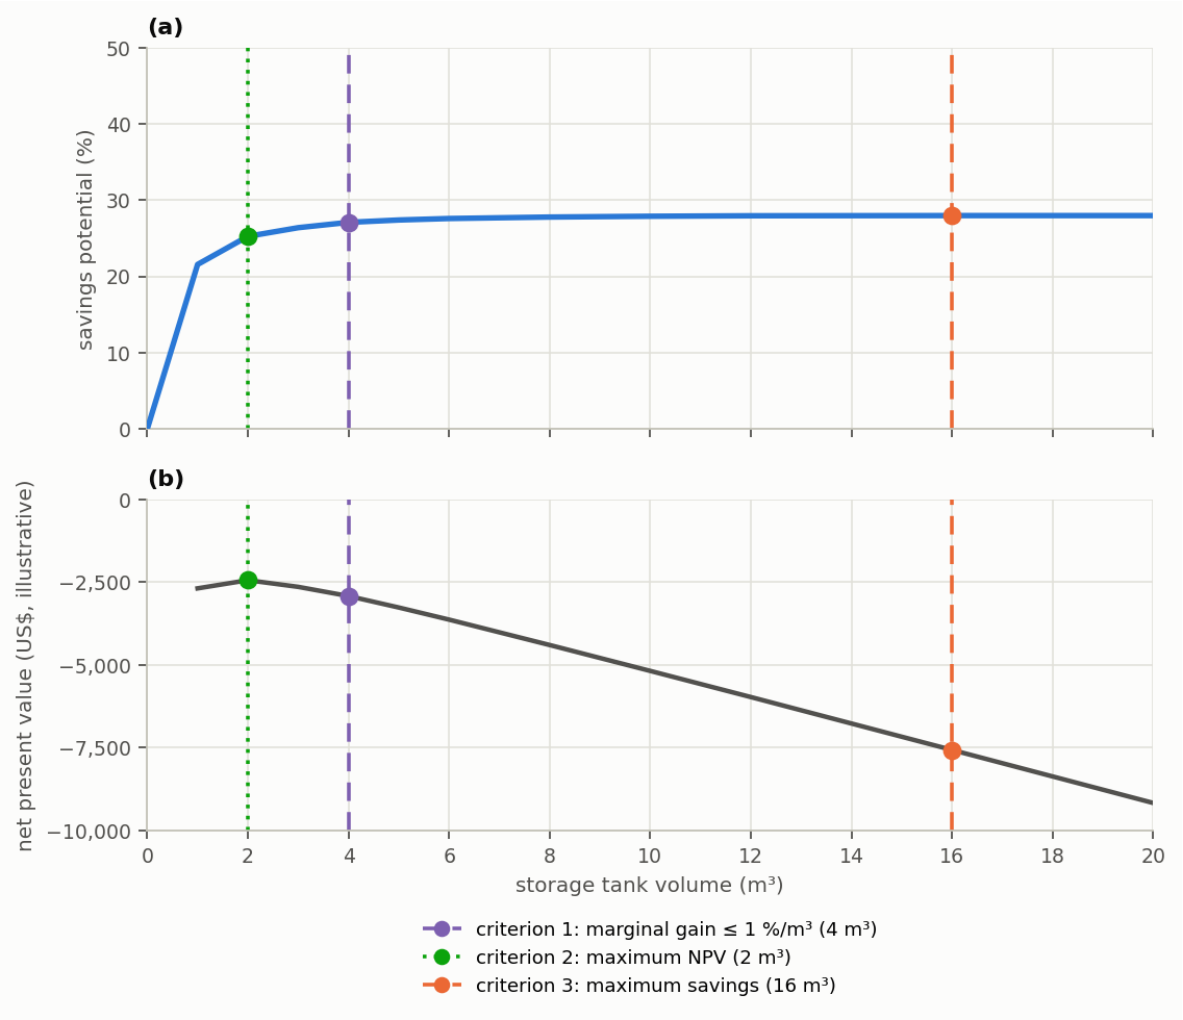


Figure 12 — Sweep of the tutorial project read by three criteria: (a) saving potential and (b) net present value of the same set of volumes. The vertical lines mark the volume chosen by marginal gain below 1 %/m³, by maximum NPV and by maximum potential; the volume of each is noted in the legend, because it depends on the swept grid and on the economic assumptions in force.

2.2.4. Why the program simulates: the empirical methods

Standards and handbooks have long offered a set of methods to size the tank: Rippl's, the simulation, and several practical rules, such as the German, the British and the Australian. They are still in common use in projects and academic work, and it is worth understanding what each one answers before comparing them with the program's sweep. Some standards also have a simplified method of the same kind, a number of days of the smaller of annual yield and demand, next to the detailed daily simulation.

Rippl's method is the mass diagram applied to the tank: it accumulates, period by period, the difference between demand and usable rain, and adopts as the volume the largest cumulative deficit of the series. The resulting volume is the one that would meet **all** the demand even in the worst dry spell on record, and so it grows with the length of the series and with its resolution: with daily data, dry sequences appear whole; with monthly data, part of them is diluted in the monthly mean.

The practical methods are rules of thumb. The German one takes 6% of the smaller of annual usable rain and annual demand; the British one takes 5% of the product $P \times A$, with P the mean annual precipitation and A the collection area; the Australian one does a monthly balance by trial until the desired confidence is reached. Neither of the first two uses the distribution of rain over time, and the British one does not even use the demand.

The table below applies five sizing approaches to the New York tutorial project, rounds each volume to a multiple of 250 L and simulates, in the program itself, the potential each one produces.

Table 23 — Volumes given by classical sizing rules for the tutorial project, rounded to 250 L, and the potential each one yields in the daily simulation

Method	Rule	Volume	Simulated potential
German practical rule	6% of the smaller of annual supply and demand	3,750 L	26.66%
Rippl, monthly series	largest accumulated deficit, months	5,750 L	27.43%
Rippl, daily series	largest accumulated deficit, days	8,000 L	27.74%
British practical rule	0.05 × P × A	8,500 L	27.78%
daily simulation, marginal gain of 1 %/m³	sweep	**4,000 L**	**26.83%**

Table 24 — Storage fraction of the sweep volumes and the simulation time step Fewkes and Butler (2000) recommend for each range

Volume	Storage fraction S/(A·R)	Time step recommended by Fewkes and Butler
1,000 L	0.0059	hourly
2,000 L	0.0118	daily
3,000 L	0.0178	daily
4,000 L	0.0237	daily
8,000 L	0.0474	daily
12,000 L	0.0711	daily
20,000 L	0.1185	daily

The first table shows what the concave curve of section 4.4 already announced. The methods that size for the worst dry spell, such as Rippl with a daily series (8,000 L), and those that ignore demand, such as the British one (8,500 L), lead to tanks of 8 to 8.5 m^3, which deliver at most 0.95 percentage points more than the 4,000 L of the simulation (27.78% against 26.83%) at twice the volume. The German method (3,750 L, 26.66%) and Rippl with a monthly series (5,750 L, 27.43%) get the order of magnitude right in this case, but by coincidence: the German method has no way of knowing how the rain is distributed, and would give the same volume for a city with six dry months.

The essential difference is that the empirical methods answer a fixed question, and the simulation answers the question the designer declares. Rippl asks which volume never fails; the British method asks what fraction of the rain to store; the sweep with marginal gain asks from which volume on the next cubic metre stops paying off. The right volume varies with local rain, roof area, number of residents and demands, and sizing tanks by local tradition, without simulation, can lead to low-efficiency systems. In the three example cities the sweep happens to give the same ideal volume, 4,000 L, but only because the tutorial house is the same in all three and the marginal-gain threshold is the same; change the roof, the demand or the threshold and the volume moves.

2.2.5. The time step and the storage fraction

The program simulates day by day, and that choice has a known range of validity. Fewkes and Butler (2000) compared behavioural models with steps of one minute, one hour, one day and one month, took the hourly model with the YAS rule (section 2.1) as the reference, and showed that the right step depends on a dimensionless quantity, the **storage fraction**.

$$F_S = S \div (A \times R) \tag{13}$$

Table 25 — Variables of Equation 13

Symbol	Meaning	Unit
F_S	storage fraction	dimensionless
S	tank capacity	m³
A	catchment area in horizontal projection	m²
R	mean annual precipitation	m

According to those authors' results, the hourly model is the one indicated for fractions up to 0.01; the daily one, for fractions between 0.01 and 0.125; and the monthly one, only above 0.125. The physical reason is simple: the smaller the tank relative to the rain it receives, the more it fills and overflows **within** a single rainy day, while the demand is withdrawn over the hours; a daily step adds up in a single inflow what, hour by hour, would have come in and gone out little by little.

The second table calculates the fraction for the volumes of the tutorial sweep. The chosen 4,000 L cistern has a fraction of 0.0237, within the range of the daily model; the 1,000 L tank (0.0059) falls below 0.01, and for it the daily result should be read as an approximation. Fewkes and Butler recommend the hourly step for that volume and the daily step for the others. Campisano and Modica (2015), who simulated a residential system with daily and sub-daily steps from measured discharges, reached a complementary conclusion: the daily step is reliable for estimating **water saving**, but steps of at most one hour are needed when the objective is **stormwater retention**, above all in small tanks with high demand.

> **In practice.** For potable water saving in buildings, the program's daily step is adequate in the usual design range. If the storage fraction of your study falls below 0.01, declare the limitation; and if the objective is to attenuate peak flows in urban drainage, the program is not the right tool.

2.2.6. What the literature says about the ideal volume

There is no single definition of ideal volume, and the systematic review by Semaan et al. (2020) helps to place the program's criterion. Examining optimisation studies of domestic systems, the authors observed that sizing the tank is the most important optimisation objective, but that cost is the most used criterion; that undersizing produces systems unable to supply a reliable volume; and that oversizing raises the investment for a small marginal benefit and may even compromise water quality, as the water is stored for longer.

Campisano et al. (2017), in a broad review of urban rainwater harvesting systems, bring together criteria from three families: **water efficiency**, such as saving potential and reliability; **economic**, such as net present value and payback; and **drainage performance**, such as retention. The program covers the first two families and declares that it does not cover the third.

The marginal-gain criterion belongs to the first family and has an advantage over fixed reliability, as in Rippl's: it does not require the designer to choose an acceptable failure level, which rarely has a technical justification, but a level of diminishing return, which is read directly in cubic metres of tank. The disadvantage is symmetrical: the 1 %/m³ threshold, or the 5 %/m³ one, is also a choice, and must be declared.

2.2.7. Sensitivity to the step

The ideal volume depends on the sweep step, and it is worth knowing by how much.

A coarse step jumps over the knee of the curve: with a 5,000 L step, the first point assessed after zero already has the mean marginal gain of the whole interval, and the second may already be below the threshold. The ideal is shifted upwards.

A fine step resolves the knee better, at the cost of time.

Practical recommendation: a step between 500 and 1,000 L for residential tanks, and between 2,000 and 5,000 L for large buildings, always declaring the step adopted together with the ideal volume.

2.2.8. Why the curve has this shape

The rainwater yield curve is concave and asymptotic, always. Two reasons:

Small events are the majority. The first litres of storage capture the frequent, small rains, which account for most of the days. The last litres only serve the few extreme events.

The suppliable fraction is a ceiling. The potential cannot exceed the fraction of the demand that rain supplies, defined in section 4.2. The curve approaches that ceiling and never crosses it — an invariant the test suite checks up to volumes of 100 m^3.

2.2.9. Is the series long enough?

Every result of this section depends on the rainfall series loaded, and the question the reviewer asks first is whether it is enough. Geraldi and Ghisi answered it in three papers: sub-series are extracted from a long series, each one is simulated, and it is counted how often they reproduce the result of the whole series. The representative length is the shortest that reproduces the result in most windows, and that **keeps reproducing** it at longer lengths — an isolated hit in a short sub-series is not worth a recommendation.

The program has this analysis in the sweep step, in the «is the rainfall series long enough?» button. It uses the same grid of volumes and the same marginal-gain threshold as the sweep, because the answer depends on them, and it returns the verdict in one sentence, with the frequency table by length.

The answer belongs to this project, not to the city. It is the point the papers do not isolate and that the analysis makes visible: the length of series needed depends on how much of the demand the rain is asked to supply. The larger the share to be covered, the more the cistern depends on rare dry spells, and the longer the series that contains them must be. A short series does not get the mean potential wrong; it gets the volume wrong, which is what is bought.

The program returns the verdict for your project, with its roof, demand and suppliable fraction. Run it for each city of a comparison: the three example cities, with thirty years of daily data each, are a good test. Not computed in this version: the representative series length for New York, London and Cape Town; run the analysis on the three example projects to obtain it.

> **Warning: a short series does not become a long one by averaging.** If the analysis says the project needs more years than the series has, the ideal volume calculated is provisional, and that is what is declared in the work. Repeating the simulation with another window of the same data does not solve it: what is missing is record, not processing. Some standards fix a minimum number of years of daily data; Triton keeps the Geraldi and Ghisi analysis, which answers for each project instead of fixing a minimum.

2.2.10. What the sweep does not answer

- **Which volume to buy.** Tanks exist in commercial volumes; the ideal calculated must be rounded to the nearest available volume, and the sweep already helps by working in multiples of 250 L.

- **Whether the system is worth it.** That is section 2.7.
- **Whether the volume fits on the plot.** The program does not know the site.
- **How much the cistern attenuates the drainage.** The daily step does not represent peak flows, and retention needs an hourly step or less, as Campisano and Modica (2015) show.

2.3. Efficiency indicators

> This section formally defines each indicator the program reports, with its unit, and says **what each one does not measure**.

A misread indicator is worse than none, and those of this section are often confused in the literature. The first two start from the same numerator — the rainwater actually consumed — and differ only in the denominator: a small arithmetic difference and a large difference in meaning, because each denominator asks a different question. The third is not a ratio between volumes but a count of days, and it answers a question neither of the other two reaches: how often the system can be counted on (Figure 13).

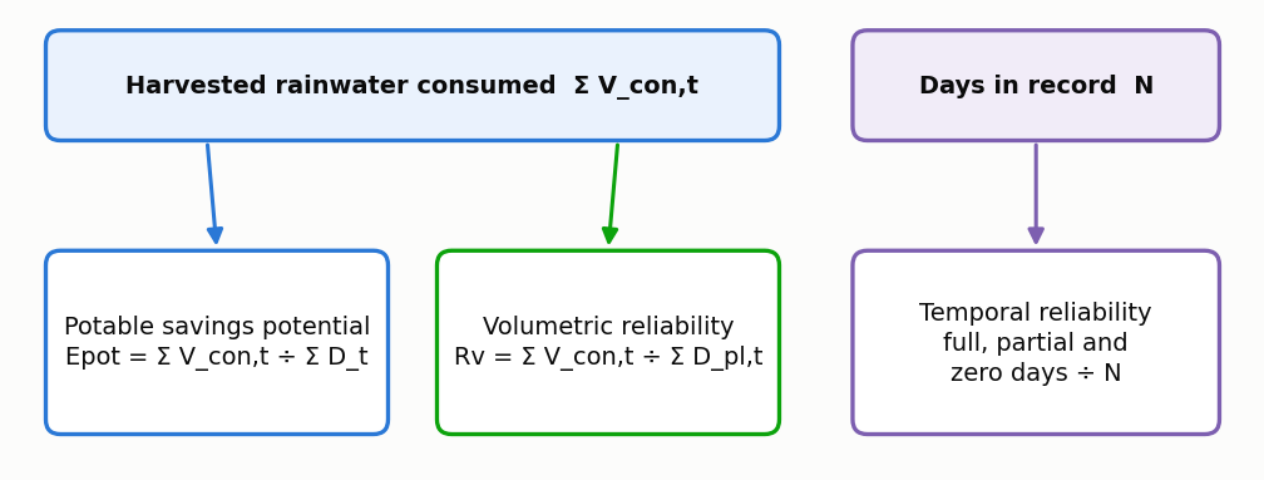


Figure 13 — The three efficiency indicators and what each one counts. The saving potential and the volumetric reliability share the numerator and are related by the identity Epot = Rv × f, where f is the suppliable fraction; the time reliability counts days, not litres.

2.3.1. Potable water saving potential

The potable water saving potential is the program's central indicator and the one that appears in the summary of any study. It expresses the fraction of the **total** consumption of the building that rainwater managed to replace over the whole simulated series, not only of the part rain could supply.

$$\mathrm{Epot} = \left(\sum V_{\mathrm{con,\,t}} \div \sum D_{\mathrm{t}}\right) \times 100 \tag{14}$$

Table 26 — Variables of Equation 14

Symbol	Meaning	Unit
`Epot`	potable water saving potential	%
`V_con,t`	rainwater volume consumed on day `t`	L
`D_t`	total demand of the building on day `t`	L
`Σ`	sum over all the days of the simulated series	—

The denominator of Equation 14 is the **total** demand, and that choice is the origin of the most common confusion when reading results. A system that fully met all the demand assigned to it, without failing on a single day, would still show a saving potential equal to the declared suppliable fraction, not one hundred per cent. The ceiling, therefore, is not a limitation of the system: it is an arithmetic consequence of the definition of the indicator.

2.3.2. Volumetric reliability

Volumetric reliability answers a different, complementary question: of the water the system **should** supply, how much did it actually supply? The denominator here is the rainwater demand, not the total demand.

$$\mathrm{Rv} = \left(\sum V_{\mathrm{con,\,t}} \div \sum D_{\mathrm{pl,\,t}}\right) \times 100 \tag{15}$$

Table 27 — Variables of Equation 15

Symbol	Meaning	Unit
`Rv`	volumetric reliability of the system	%
`V_con,t`	rainwater volume consumed on day `t`	L
`D_pl,t`	rainwater demand of day `t`, that is, the part rain can supply	L
`Σ`	sum over all the days of the simulated series	—

Equations 14 and 15 differ only in the denominator, and that difference is enough for them to be related by an exact identity, useful as a quick check of any result.

$$\mathrm{Epot} = \mathrm{Rv} \times f \tag{16}$$

Table 28 — Variables of Equation 16

Symbol	Meaning	Unit
`Epot`	potable water saving potential	%
`Rv`	volumetric reliability	%
`f`	fraction of the total demand suppliable by rainwater	dimensionless

A system with 93% reliability and a 28% suppliable fraction saves 26% of the total consumption, and the three numbers say the same thing in three ways. That is the case of the New York tutorial with a 3,000 L cistern, the first simulation of section 4.3: the saving potential is 25.99%, and dividing by the suppliable fraction of 0.28 gives a volumetric reliability of about 92.8%. Reporting only one of them, without declaring the suppliable fraction adopted, makes the result impossible to compare with that of another study, and it is the most frequent cause of improper comparisons in the literature of the field.

The literature uses different names for the same ratio. Fewkes and Butler (2000) call **water saving efficiency** the quotient between the rainwater volume supplied and the demand the system should meet, which is the volumetric reliability of this section. Other authors call efficiency what here is saving potential; some standards call it the coverage rate. When comparing with another work, check the denominator, not the name.

2.3.3. Time reliability

Time reliability classifies each day of the series into one of three mutually exclusive classes, according to the relation between the rainwater volume consumed and the day's rainwater demand, defined in Equation 9. The day is **full** when rainwater fully meets the rainwater demand; **partial**, when it meets part of it and the mains supplies the rest; and **none**, when the tank is empty and the mains supplies all the demand (Figure 14). The three percentages add up to 100%. The classification counts days, not volume: a day on which one litre was missing to meet the demand is partial, not almost full, and that is why time reliability does not convert directly into volume saved.

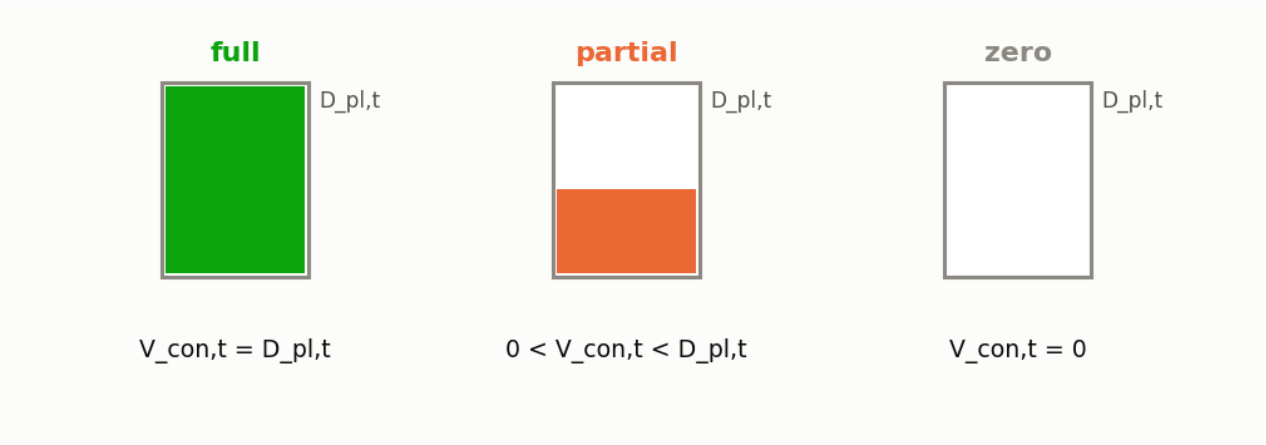


Figure 14 — Daily supply classes: full (V_con,t = D_pl,t), partial (0 < V_con,t < D_pl,t) and none (V_con,t = 0). The filled height represents the fraction of the day's rainwater demand supplied by rainwater.

Formally, the day is **full** when `V_con,t = D_pl,t`, with a tolerance of 10^{-5} L; **partial** when `0 < V_con,t < D_pl,t`; and **none** when `V_con,t = 0`.

In the tutorial with a 3,000 L cistern, 91.9% of the days are full, 1.7% partial and 6.4% with no supply. Notice that the time reliability, 91.9%, is lower than the volumetric one, about 92.8%. There is no contradiction: partial days do not count as full, but they contribute volume, and it is that water the volumetric reliability adds and the time reliability does not. The difference between the two is therefore an indirect measure of how far the failure days are partial failures. With a 4,000 L cistern the full days rise to 95.3%.

What it measures: how often the user can count on the system.

What it does not measure: volume. A system can have 95% full days and a low potential if the rainwater demand is small, and the opposite also happens.

> Time reliability is the indicator that matters most for the **plumbing design**. Many days with no supply require a well-sized automatic backup supply, and the user notices the switching between the two sources.

2.3.4. Overflow

$$V_{\text{ext, avg}} = \left(\sum V_{\text{ext, t}}\right) \div n \tag{17}$$

Table 29 — Variables of Equation 17

Symbol	Meaning	Unit
`V_ext,avg`	mean daily overflow	L/day
`V_ext,t`	volume overflowed on day `t`	L
`n`	number of days of the simulated series	day

What it measures: how small the cistern is relative to the rain events.

What it does not measure: waste. The water that overflows goes to the urban drainage, as it would without the system. There is no loss compared with the no-system scenario — only an opportunity not taken.

> The overflow **never reaches zero** in a real system. It tends to a floor that is the difference between what the roof collects and what the demand consumes, and in the tutorial the roof supplies 2.3 times the rainwater demand, so that the floor is a large share of the water collected. Anyone who wants flood retention needs a detention tank, which is another project with another logic.

2.3.5. Efficiency of use of the collected water

The program does not print this indicator, but it follows directly from the previous ones and helps to understand the overflow. It is the fraction of the water that reached the cistern, after the first flush, that ended up consumed.

$$\eta\mathrm{cap} = \left(\sum V_{\mathrm{con,\,t}} \div \sum V_{\mathrm{cap,\,t}}\right) \times 100 \tag{18}$$

Table 30 — Variables of Equation 18

Symbol	Meaning	Unit
`η_cap`	efficiency of use of the collected water	%
`V_con,t`	rainwater volume consumed on day `t`	L
`V_cap,t`	volume collected on day `t`, after the first flush	L
`Σ`	sum over all the days of the simulated series	—

In the tutorial's 3,000 L cistern, the system consumes 57.0 m^3 a year and overflows a mean of 150.8 L/day, about 55 m^3 a year; the mass balance closes with what stays in the tank, which is small. About half of the water that reached the cistern is therefore consumed. The number explains why enlarging the cistern yields so little beyond a certain point: water is not missing on the roof, **demand** to consume it is. The gross supply of the roof, 143 m^3 a year, is 2.3 times the rainwater demand of 61 m^3 a year; when supply greatly exceeds the rainwater demand, the efficiency of use of the collected water is necessarily low, whatever the volume.

2.3.6. Duration and intensity of failures

The previous indicators say how much and how often the system fails, but not **how** it fails. Hashimoto, Stedinger and Loucks (1982) proposed, for water resource systems in general, three complementary criteria that are now used in rainwater harvesting too: **reliability**, which is the probability of the system being in a satisfactory state; **resilience**, which measures how quickly it recovers from a failure; and **vulnerability**, which measures the severity of failures when they occur.

The program reports the first and not the other two, but both can be calculated from the detailed daily series, exported to a spreadsheet: count the sequences of days that are not full and take their mean duration, whose inverse is a measure of resilience; and take the mean shortfall on the failure days as a fraction of the rainwater demand, a measure of vulnerability.

The design reading is direct. If the failures are long and almost total, the backup supply from the mains must be automatic and sized for the full flow of the rainwater points of use, not just to top up small shortfalls. The tutorial's days of no supply (6.4% with 3,000 L) are of this kind: the cistern is empty, not slightly short.

2.3.7. Annual volume saved

$$V_{\text{sav}} = (V_{\text{con, avg}} \times 365.25) \div 1000 \tag{19}$$

Table 31 — Variables of Equation 19

Symbol	Meaning	Unit
`V_sav`	volume of potable water saved per year	m³/year
`V_con,avg`	mean daily rainwater consumption	L/day
`365.25`	length of the mean year, including leap years (365.25)	day/year
`1000`	conversion from litres to cubic metres	L/m³

What it measures: the basis of calculation of the economic analysis and the life cycle assessment.

> **IN DEPTH · THE 365.25 IS NOT CARELESSNESS**
> The conversion uses the mean year, including leap years, because long series contain them. Using 365 would introduce a systematic bias of 0.07% — small, but for nothing.

2.3.8. Marginal gain

The formal definition of the marginal gain, with the grid of volumes made explicit, is in Equation 11, in section 2.2.

Defined in section 2.2. It is the indicator that decides the ideal volume, and it **only exists in a sweep** — a single-volume simulation does not produce it.

2.3.9. Unmet demand

$$V_{\text{unmet, avg}} = (\sum V_{\text{unmet, t}}) \div n \tag{20}$$

Table 32 — Variables of Equation 20

Symbol	Meaning	Unit
`V_unmet,avg`	mean daily demand met by no source	L/day
`V_unmet,t`	unmet demand on day `t`	L
`n`	number of days of the simulated series	day

The third part of the demand balance. It is zero in the default configuration and stops being zero when the irrigation backup supply is off.

Why it exists: without it, the balance would close by construction, attributing to the mains all the demand rain did not meet. Section 2.1 gives the details.

2.3.10. Summary table

Table 33 — Summary of the indicators, with the denominator and the question each one answers

Indicator	Unit	Denominator	Answers
saving potential	%	total demand	how much potable consumption falls
volumetric reliability	%	rainwater demand	how much of what was intended was supplied
full, partial, no-supply days	%	days of the series	how often it can be counted on
overflow	L/day	—	is the tank small?
volume saved	m^3/year	—	basis of the money and the carbon
marginal gain	%/m^3	—	is it worth enlarging?
unmet demand	L/day	—	what nobody supplied

2.4. Rainfall indices

> This section gives the equation of each of the nine indices the program calculates, and declares three divergences from the ETCCDI standard.

The rainfall indices do not take part in the water balance and do not change any simulation result. Their role is to characterise the precipitation series — and an honest characterisation is what makes it possible to compare studies of different cities.

2.4.1. The nine indices

The indices are calculated **year by year** over the loaded series, and the program reports the mean and the spread of the set of years. Throughout this section, `P_i` designates the precipitation of day `i` of the year, and a **wet day** is one on which `P_i ≥ 1 mm` — an ETCCDI convention, adopted because depths below one millimetre are of the order of the measurement error of conventional rain gauges.

2.4.1.1. Total annual precipitation, PRCPTOT

Sum of the precipitation of all the wet days of the year. It differs from the gross annual total by excluding days of negligible depth, which keeps instrument noise from accumulating in the total.

$$\mathrm{PRCPTOT} = \sum P_\mathrm{i}, \ \text{for } P_\mathrm{i} \geq 1\mathrm{mm} \tag{21}$$

Table 34 — Variables of Equation 21

Symbol	Meaning	Unit
`PRCPTOT`	total precipitation of the wet days of the year	mm
`P_i`	precipitation of day `i`	mm
`Σ`	sum over the days of the year that meet the condition	—

2.4.1.2. Precipitation on very wet days, R95p

Sum of the precipitation of the days whose depth exceeds the 95th percentile of the wet days. It measures how much of the annual total arrives in extreme events, and it is the index most directly linked to cistern overflow.

$$\mathrm{R95p} = \sum P_\mathrm{i}, \ \text{for } P_\mathrm{i} > q_{95} \tag{22}$$

Table 35 — Variables of Equation 22

Symbol	Meaning	Unit
`R95p`	precipitation accumulated on very wet days	mm
`P_i`	precipitation of day `i`	mm
`q_95`	95th percentile of the precipitation of the wet days of the series	mm

2.4.1.3. Maximum one-day precipitation, RX1day

The largest daily value recorded in the year. It is the index that sizes the overflow and the gutter, not the tank.

$$\mathrm{RX1day} = \max\left(P_{\mathrm{i}}\right) \tag{23}$$

Table 36 — Variables of Equation 23

Symbol	Meaning	Unit
`RX1day`	largest daily precipitation of the year	mm
`P_i`	precipitation of day `i`	mm
`max`	maximum value over all the days of the year	—

2.4.1.4. Maximum five-day precipitation, RX5day

The largest five-consecutive-day total of the year. It matters more to rainwater harvesting than RX1day, because a tank fills over a prolonged event and not only at the daily peak.

$$\mathrm{RX5day} = \max\left(\sum P_{\mathrm{j}}\right), \text{ for } j \text{ from } i \text{ to } i+4 \tag{24}$$

Table 37 — Variables of Equation 24

Symbol	Meaning	Unit
`RX5day`	largest five-consecutive-day total of the year	mm
`P_j`	precipitation of day `j` of the window	mm
`i`	first day of each five-day window	—
`max`	maximum value over all the windows of the year	—

2.4.1.5. Simple daily intensity index, SDII

Mean precipitation of the wet days. It separates two regimes the annual total confuses: much rain on few days and little rain on many days can produce the same PRCPTOT and very different SDII.

$$\mathrm{SDII} = \mathrm{PRCPTOT} \div n_{\mathrm{wet}} \tag{25}$$

Table 38 — Variables of Equation 25

Symbol	Meaning	Unit
`SDII`	mean intensity of the wet days	mm/day
`PRCPTOT`	total precipitation of the wet days, from Equation 21	mm
`n_wet`	number of wet days of the year	day

2.4.1.6. Days of heavy precipitation, R20mm

Count of the days on which the depth reaches or exceeds twenty millimetres. In a rainwater harvesting system, these are typically the overflow days.

$$\mathrm{R20mm} = \#\left\{i : P_{\mathrm{i}} \geq 20\mathrm{mm}\right\} \tag{26}$$

Table 39 — Variables of Equation 26

Symbol	Meaning	Unit
`R20mm`	number of days with heavy precipitation in the year	day
`P_i`	precipitation of day `i`	mm
`# { }`	count of the days that meet the condition	—

2.4.1.7. Consecutive dry days, CDD

Longest sequence of consecutive days with precipitation below one millimetre. It is the index that best predicts the performance of a rainwater system, because the longest dry spell is what empties the cistern.

$$\mathrm{CDD} = \max(L),\ \text{with } P_\mathrm{i} < 1\mathrm{mm} \text{ throughout the sequence } L \tag{27}$$

Table 40 — Variables of Equation 27

Symbol	Meaning	Unit
`CDD`	longest sequence of consecutive dry days in the year	day
`L`	length of a sequence of consecutive dry days	day
`P_i`	precipitation of day `i`	mm

2.4.1.8. Consecutive wet days, CWD

Longest sequence of consecutive days with precipitation equal to or above one millimetre. It characterises the persistence of rain, and long sequences favour the complete filling of the tank.

$$\mathrm{CWD} = \max(L),\ \text{with } P_\mathrm{i} \geq 1\mathrm{mm} \text{ throughout the sequence } L \tag{28}$$

Table 41 — Variables of Equation 28

Symbol	Meaning	Unit
`CWD`	longest sequence of consecutive wet days in the year	day
`L`	length of a sequence of consecutive wet days	day
`P_i`	precipitation of day `i`	mm

2.4.1.9. Seasonality index, SI

It measures the departure of the actual monthly distribution of the rain from a perfectly uniform distribution over the year. Unlike the previous eight, it does not belong to the ETCCDI set: it was proposed by Walsh and Lawler in 1981.

$$\mathrm{SI} = (1 \div R) \times \sum |X_\mathrm{m} - R \div 12| \tag{29}$$

Table 42 — Variables of Equation 29

Symbol	Meaning	Unit
`SI`	Walsh and Lawler seasonality index	dimensionless
`R`	total precipitation of the year	mm
`X_m`	total precipitation of month `m`, with `m` from 1 to 12	mm
`R ÷ 12`	monthly precipitation there would be if the rain were uniform	mm
`Σ`	sum over the twelve months of the year	—
`\`	\	` absolute value of the difference —

The index of Equation 29 is zero when all months receive the same depth and tends to 1.83 when all the rain of the year falls in a single month. Between these extremes, Walsh and Lawler (1981) classify the regime as very equable (below 0.20), equable with a definite wetter season (0.20 to 0.39), rather seasonal with a short drier season (0.40 to 0.59), seasonal (0.60 to 0.79), markedly seasonal with a long drier season (0.80 to 0.99), most rain in three months or less (1.00 to 1.19) and extreme (1.20 or more).

The seasonality index is the one that matters most to rainwater harvesting, and section 3.1 shows why: it is the distribution of rain over the year, not the total precipitated, that decides the yield of the system.

The nine indices remain abstract while they stay in table form, and Figure 15 places them over one year of the series. Placed over a real year of series, each one points to an identifiable stretch of the record: the most intense day, the days above the threshold, the longest dry spell, the accumulated total.

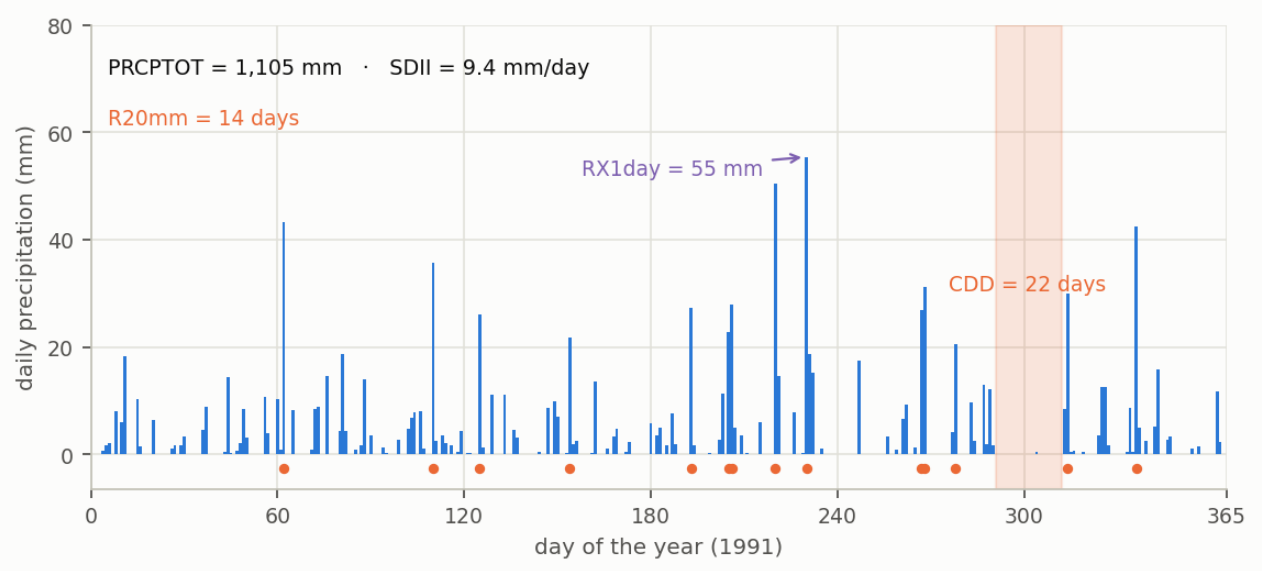


Figure 15 — Four of the nine indices marked over one year of the New York series: PRCPTOT and SDII, at the top; RX1day, the largest daily value of the year; CDD, the longest sequence of dry days, in the shaded band; and R20mm, the days with 20 mm or more, marked at the bottom.

Seasonality is the index least like the others, because it describes neither intensity nor frequency: it describes how much the rain of the year concentrates in part of it. It is also the index that most separates cities with similar annual totals, and the one that best predicts whether a tank will have to get through a long dry spell (Figure 16).

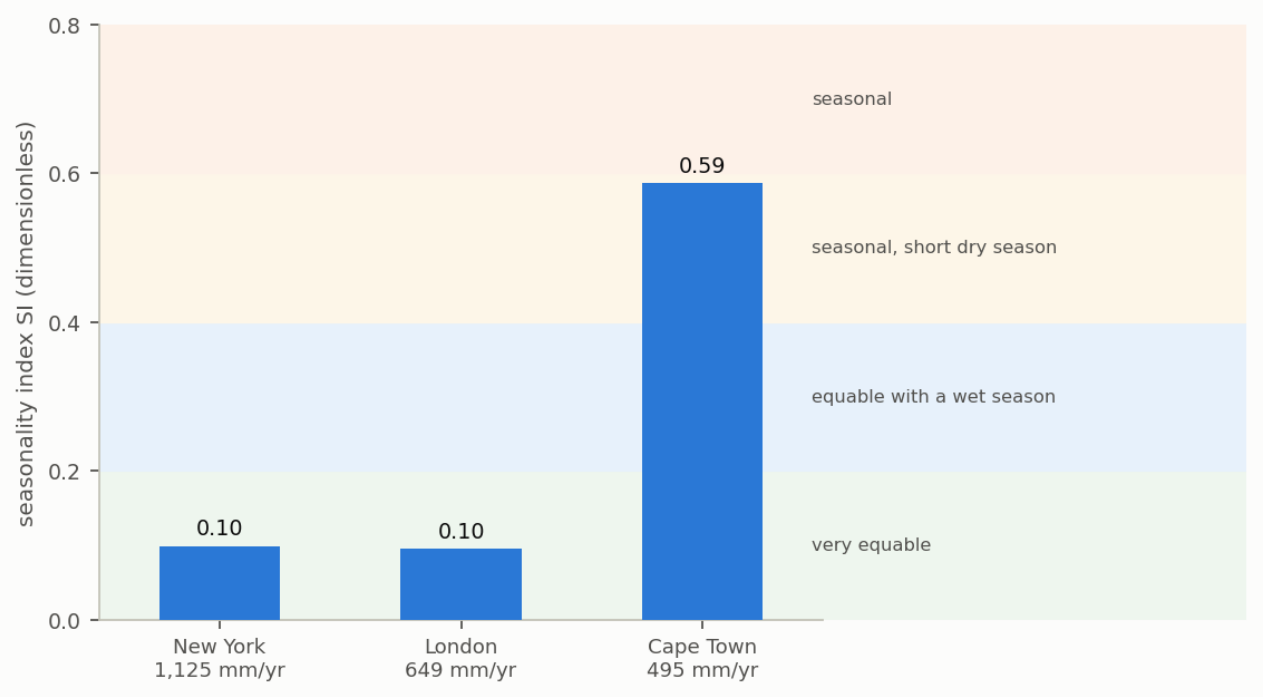


Figure 16 — Walsh and Lawler (1981) seasonality index in the three example cities (New York, London and Cape Town), with the classes of the index in the background and the mean annual precipitation under the name of each city. High annual precipitation and an even distribution over the year are independent properties.

2.4.2. Three divergences that must be declared

The program calls the set «ETCCDI plus seasonality», and the precision of the expression matters.

First: the set is not pure ETCCDI. The seasonality index is Walsh and Lawler's, and does not belong to the set of the *Expert Team on Climate Change Detection and Indices*. Conversely, **R10mm**, which is ETCCDI, is **not** implemented.

Eight of the nine indices are ETCCDI; the ninth is not; and one that would be is missing.

Second: the base period of the percentile. R95p requires a 95th percentile of the wet days. ETCCDI defines the fixed base period of 1961 to 1990. The program calculates the percentile over **the whole loaded series**.

The consequence is that the R95p of two series of different lengths is **not directly comparable**, because each one has its own threshold. For strict comparison with ETCCDI literature, trim the series to the base period.

The program calculates the percentile **only over the wet days**, which is correct: including dry days would shift the percentile down in seasonal series.

Third: the incomplete RX5day windows. The five-day moving sum uses partial windows at the start of each year, so that the first windows have one to four days. The effect is small and always in the direction of underestimating the RX5day of the first days of the year.

The program's indices tab presents each indicator year by year: the total annual precipitation (Figure 17) and the longest sequences of dry and wet days (Figure 18).

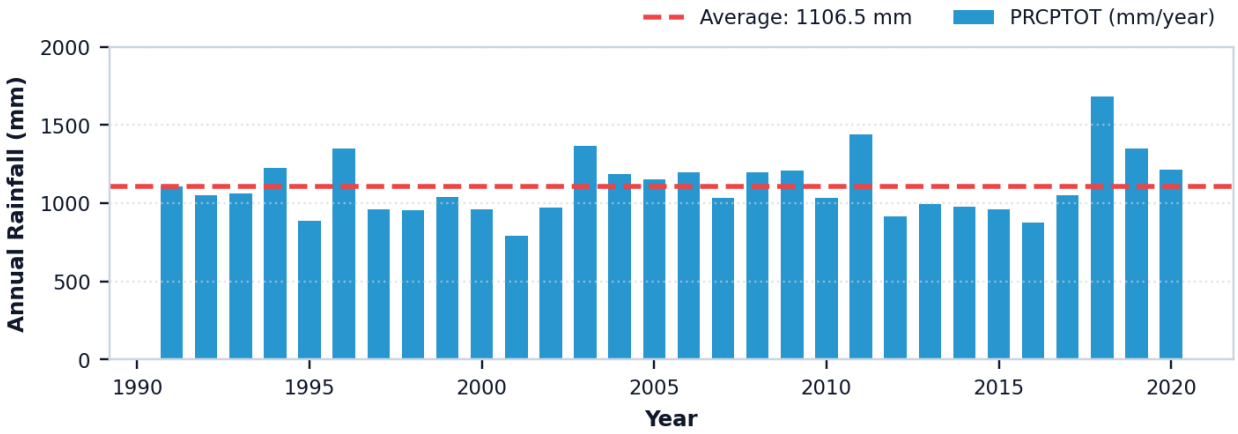


Figure 17 — Total annual precipitation (PRCPTOT) of the New York series, with the mean of the period as a dashed line, in the indices tab. Figure generated by the program itself.

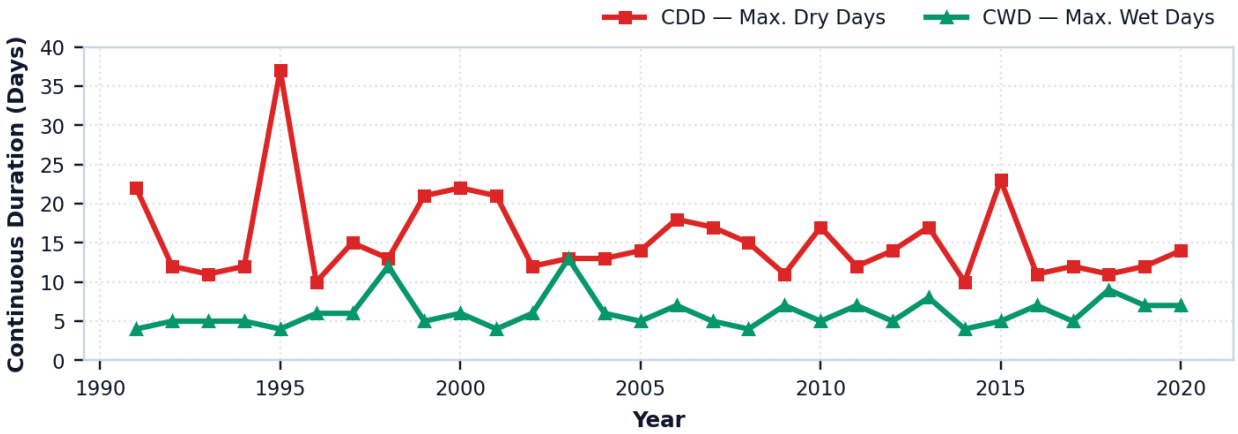


Figure 18 — Longest annual sequence of dry days (CDD) and of wet days (CWD) of the New York series, in the indices tab. They are the two indices most directly linked to the tank volume the rainfall regime requires. Figure generated by the program itself.

2.4.3. What they are for in the study

Characterising the series in the method of the paper. PRCPTOT, SDII and SI describe the regime better than the annual mean alone.

Explaining the result. A high CDD, or a strongly seasonal regime, explains a performance below what the annual total suggests: in section 3.1, Cape Town receives rain on only 28% of the days, its wettest month has 8.3 times the rain of its driest, and the same house yields 14.52% there against 26.83% in New York.

Comparing climate scenarios. Between the historical and the projected series, what usually changes first is SDII and CDD, not PRCPTOT. Reporting only the annual total hides the change that most affects the system.

2.4.4. What the indices do not do

They do not enter the balance. They do not change the sizing. They do not replace the daily simulation — which is precisely the program's argument against methods based on mean values.

An index is a summary. The balance uses the whole series.

2.5. Sizing the treatment line

> This section formalises how the program sizes the rainwater treatment plant and explains the **incremental rule**, which keeps treatment from being counted twice in the budget and in the cash flow.

The water running off a roof carries dust, leaves, soot and bird droppings, and no use — not even toilet flushing — admits it reaching the point of use as it left the roof. The rainwater treatment plant of the program is the set of equipment that does this conditioning, and the program sizes it from three inputs: the quality class the use requires, the roof area and the annual volume of rainwater actually consumed, the latter a result of the daily balance presented in section 2.1.

The treatment line sized by the program has four components in series. The **first flush** diverts the first depth of each rain, which carries the dirt accumulated on the roof; the **mechanical inlet filter** removes leaves and coarse solids before they reach the tank; **disinfection** is the mandatory stage, on which the microbiological safety of the stored water depends; and the **polishing filter** is optional, and meant for uses where appearance or the absence of dissolved residue matters.

The treatment line is a sequence, and the order of the stages is not arbitrary: each one removes what would make the next one ineffective. It is worth having the whole chain in view before discussing each part (Figure 19). The order is not interchangeable: disinfecting before filtering consumes the reagent in suspended organic matter and leaves micro-organisms protected in the particles. Turbidity is therefore a condition of the effectiveness of disinfection, not just an aesthetic parameter.

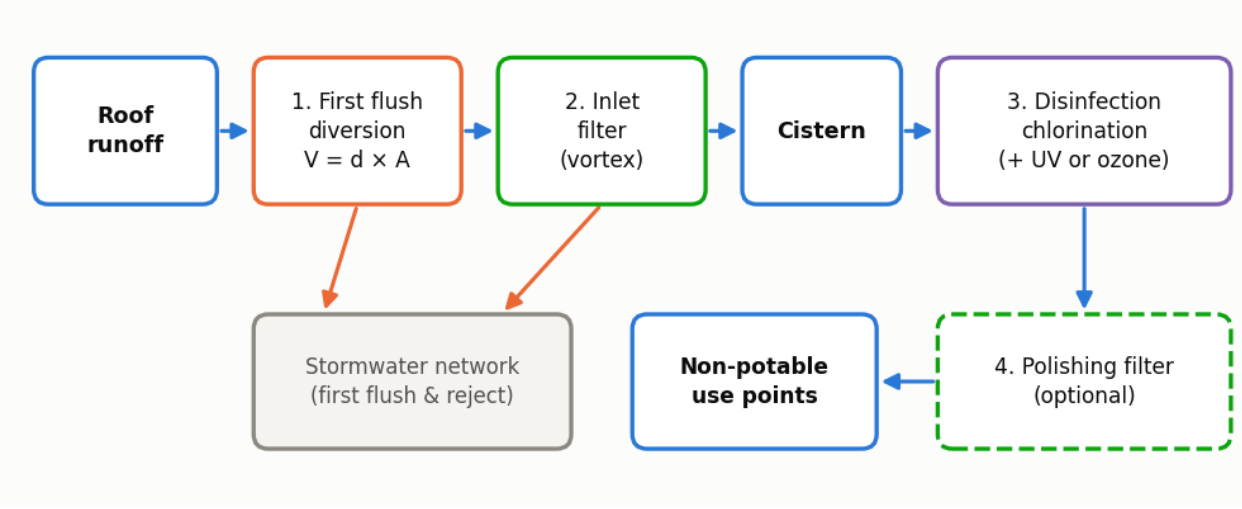


Figure 19 — Components of the treatment line sized by the program, in the order of the flow, and destination of the material retained. The first flush and the inlet filter act before the cistern; disinfection acts after them because the reagent would be consumed by the suspended organic matter the previous stages remove; the polishing filter is optional.

2.5.1. The inlet filter

The inlet filter is sized by the roof area, not by the intended quality class, because what it has to cope with is the peak flow the roof produces — a quantity that does not depend on the final destination of the water. The three ranges adopted by the program are generic reference ranges, one equipment class per range; check the capacity declared by the manufacturer of the equipment you specify.

Table 43 — Mechanical inlet filter sized by the roof area

Roof	Equipment	Mesh
up to 200 m²	self-cleaning vortex DN 100	350 µm
up to 500 m²	self-cleaning vortex DN 150	400 µm
above 500 m²	basket or cyclonic DN 200	500 µm

> The range limits follow the area a product of that class is declared to serve, not an arbitrary margin over it. That is why a 180 m^2 roof receives the DN 100 filter: the class is declared enough for up to 200 m^2, and imposing that of the next range would make the installation more expensive without technical grounds.

2.5.2. Disinfection

Disinfection is the stage the program never dispenses with, and the reason lies in the concept of residual. Among the three technologies available, only chlorination leaves in the water a disinfecting agent that remains active after treatment; ultraviolet radiation and ozonation act at the moment of passage and leave nothing behind (Figure 20).

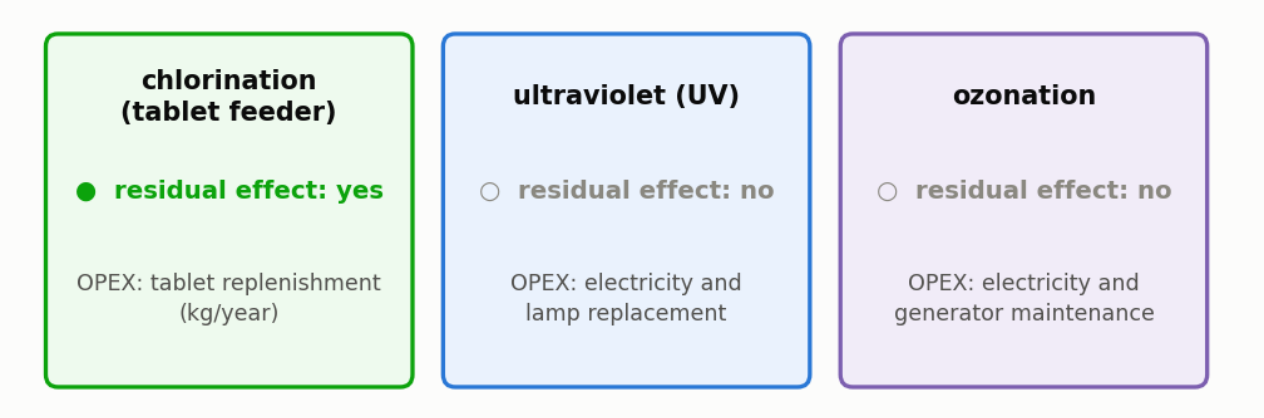


Figure 20 — The three disinfection technologies, the residual effect of each one and the make-up of the annual running cost (OPEX). The residual effect distinguishes chlorination from the others: it protects the stored water, while ultraviolet radiation and ozone act only on the water passing through the equipment.

Ultraviolet and ozone come in as a barrier additional to chlorination, not as substitutes for it. Without a residual, the treated water becomes contaminated again on the way to the point of use, and the right practice, which is to keep a free chlorine residual according to the applicable guideline for the use, keeps chlorination to protect the tank and the internal network. The economic consequence is direct: both options add the cost of chlorine to their own, and choosing either of them never reduces the running cost. In the tutorial, tablet chlorination alone is a single stage with no ultraviolet energy and 0.2 kg CO_2e a year; chlorination plus ultraviolet is two stages, 37.5 kWh a year and 18.2 kg CO_2e; chlorination plus ozonation is two stages and 15.2 kg CO_2e (illustrative grid factor, not a measured value). The program carries no price catalogue for this equipment in the International Edition, so these comparisons are about energy and carbon: enter your own prices if you want cost.

2.5.2.1. The mass of chlorine

The chlorination consumable is sized by the mass of commercial product consumed per cubic metre treated, which follows from the dose applied and the purity of the product bought.

$$m_{\text{prod}} = (C_{\text{Cl}} \div 1000) \div p \tag{30}$$

Table 44 — Variables of Equation 30

Symbol	Meaning	Unit
`m_prod`	mass of commercial product consumed per cubic metre treated	kg/m³
`C_Cl`	dose of active chlorine applied to the water	mg Cl_2/L
`1000`	conversion from milligrams per litre to kilograms per cubic metre	—
`p`	purity of the product, in mass of active chlorine per mass of product	dimensionless

> **What is bought is the product, not pure chlorine.** The calcium hypochlorite tablet contains about 65% active chlorine, and the price per kilogram refers to the commercial product, not to the active ingredient. Calculating the cost by the mass of active chlorine would underestimate it by the inverse of the purity, that is, by about 35% — and it is a common mistake in budget spreadsheets.

2.5.3. The polishing filter

The polishing filter is optional and is the only point of the sizing where the target quality class influences the choice of equipment. For the more demanding classes, the program recommends including it, and the recommendation also varies in the type of filter medium: laundry, because it involves contact with fabric and skin, requires block activated carbon, whereas the other uses are satisfied with a sand filter or a twenty-micrometre cartridge.

Table 45 — Polishing filter recommendation by target quality class

Class	Polishing recommended?	Equipment when ticked
1 — toilet flushing and general non-potable uses	no	sand filter or 20 µm cartridge
2 — irrigation and washing	yes	likewise
3 — cooling towers and boilers	yes	likewise
4 — laundry	yes	**block activated carbon**

The recommendation, however, is not an imposition: the filter only enters the sizing if the user actually ticks it. When the class recommends it and the user declines, the program records the refusal in a field of its own and the report shows it, so that the decision is documented instead of disappearing.

> **Classes 2 to 4 are criteria adopted by the program, not by a standard.** The quality required for each end use is set by the health authority and the guideline that applies to the case. In a published study, present the classes as a criterion adopted by the author, never as a normative requirement.

2.5.4. The first flush

The first flush enters the program in two ways. In the water balance, it is the depth subtracted from each day's precipitation, described in section 2.1. In the budget, when the physical sizing of the first flush is enabled in step **3. Quality & Treatment** — the default in the interface —, it is a subsystem with its own investment, running cost and embodied carbon, made up of the leaf separator and the first-flush chamber.

The volume of the first-flush chamber is the product of the first-flush depth and the catchment area, `V_ff = d × A`, in litres, with `d` in millimetres and `A` in square metres. The program sizes a vertical diversion column for small volumes and a tank for larger ones, adds a leaf separator sized by the catchment area, and gives the subsystem an annual running cost. In the International Edition the prices are typed in; the manual's cases

leave the first-flush subsystem out of the cost table and count it in the carbon.

Table 46 — Sizing of the first flush in the tutorial project

Item	Value
first-flush depth	2 mm
catchment area	150 m²
volume of the first-flush chamber	300 L
embodied carbon of the chamber and the leaf separator	21.1 kg CO_2e (6.5% of the project's embodied carbon)

The investment of the subsystem is part of the investment of the treatment line and therefore enters the cash flow through the incremental rule below.

2.5.5. The incremental rule

The incremental rule is the part of the calculation most often got wrong in home-made implementations, and the error is always the same: counting treatment twice. It applies on three different fronts, and on each it takes its own form.

In the investment. The budget of a rainwater harvesting system already sets aside a generic treatment allowance within the accessories item, because no designer prices a system without some form of filtering. Adding the detailed line on top of that allowance would charge treatment twice, and so the program deducts the generic allowance and adds only the increment.

$$\mathrm{CAPEX}_{\mathrm{inc}} = \mathrm{CAPEX}_{\mathrm{line}} - V_{\mathrm{gen}} \tag{31}$$

Table 47 — Variables of Equation 31

Symbol	Meaning	Unit
`CAPEX_inc`	incremental investment of the treatment line	currency
`CAPEX_line`	total investment in the equipment of the sized line	currency
`V_gen`	generic treatment allowance already included in the accessories item	currency

In the running cost. Chlorination is already paid in the chemical consumables line of the cash flow, so the incremental running cost of the treatment line deducts that part and the hypochlorite is paid once, not twice.

In the life cycle assessment. The treatment line **replaces** the chlorination term instead of adding to it, and the different treatment between the cash flow and the emission inventory follows from the two accounting for different quantities.

> The rule lives in a single module, consumed by **both** economic engines of the program. Two copies of the same rule diverge over time, and the divergence between them is invisible in the result: each engine responds consistently with itself.

2.5.6. Switching the treatment line off

The sizing of the treatment line can be switched off entirely, and in that case neither the investment nor the running cost of treatment enters the economic analysis. The purpose of the switch is to allow the study of the hypothesis of treatment already existing in the building — in which case the cost should not be attributed to the rainwater system — and to compare scenarios with and without the line. Switching it off does not mean the water needs no treatment: it means the treatment is not being priced here.

2.5.7. What the program does not size

The scope of the sizing ends at the equipment of the line, and four related items remain the designer's responsibility. The **hydraulic arrangement of the first flush** — fittings, purge device and connection to the drainage — is not designed: the program calculates only the volume of the first-flush chamber and its cost. The **piping** of the treatment line and the head loss it imposes are not calculated either. The **maintenance regime** — changing the filter element, cleaning the vortex, replacing tablets — is not planned by the program, although it determines a good part of the real running cost. And **quality control** remains entirely outside the scope: the program sizes equipment from assumptions, and does not replace laboratory testing.

Standards for rainwater systems deal with control and maintenance, and the corresponding plan is the designer's responsibility. Typical practice is to inspect and clean the pre-treatment, the gutters, the filters and the pumps at intervals of months, and the tank at intervals of a year; set the intervals from the manufacturer's instructions and the rule that applies to the building.

2.6. Pumping energy

> This section gives the complete chain from the shaft to the socket, and explains why the nameplate power is **not** what the meter records.

Three versions of this calculation have existed in the program, and the first two made the mistakes described in the item «Why the complete chain matters»: treating the nameplate power as electrical power and deducting the pump efficiency twice. Anyone reading a study made with an old version needs to know this.

2.6.1. Nameplate power is shaft power

Motor standards require the **efficiency** to be marked on the motor's nameplate, as a quantity separate from the power. That only makes sense if the nameplate power is the mechanical power **at the shaft**.

Hence the chain has two efficiencies, not one:

Table 48 — The two efficiencies of the pumping chain and what each one converts

Efficiency	What it converts
of the pump, `η_b`	shaft power into hydraulic power delivered to the water
of the motor, `η_m`	electrical power from the socket into mechanical power at the shaft

The program asks for both, in separate fields.

2.6.2. The equations

Specific pumping energy, per cubic metre lifted:

$$e = (\rho \times g \times H) \div (\eta b \times \eta m) \tag{32}$$

Table 49 — Variables of Equation 32

Symbol	Meaning	Unit
`e`	specific energy consumption per volume pumped	kWh/m³
`ρ`	density of water, taken as 1,000	kg/m³
`g`	acceleration of gravity, taken as 9.81	m/s²
`H`	total manometric head of the pumping	m head
`η_b`	hydraulic efficiency of the pump	dimensionless
`η_m`	efficiency of the electric motor	dimensionless

Equation 32 does not depend on the flow rate or the installed power. Lifting one cubic metre of water to a given height costs the same energy with a large or a small pump, because the work done is the same; what changes with the power is the time taken to do it, not the specific consumption.

When the operating flow rate is declared, the equivalent form:

$$e = P \div (Q \times \eta m) \tag{33}$$

Table 50 — Variables of Equation 33

Symbol	Meaning	Unit
e	specific energy consumption per volume pumped	kWh/m³
P	nameplate power of the pump set, which is shaft power	kW
Q	pumping flow rate entered or deduced	m³/h
η_m	efficiency of the electric motor	dimensionless

The hydraulic efficiency of the pump does not appear in Equation 33, and the absence is deliberate: it is already built into the fact that a motor of P kilowatts at the shaft makes the pump deliver Q cubic metres per hour at that head. Dividing by it again would count the hydraulic loss twice.

Flow rate, when not declared:

$$Q = (P \times \eta b) \div (\rho \times g \times H) \tag{34}$$

Table 51 — Variables of Equation 34

Symbol	Meaning	Unit
Q	deduced pumping flow rate	m³/h
P	nameplate power of the pump set, which is shaft power	kW
η_b	hydraulic efficiency of the pump	dimensionless
ρ	density of water, taken as 1,000	kg/m³
g	acceleration of gravity, taken as 9.81	m/s²
H	total manometric head of the pumping	m head

Energy of the start-ups:

$$E_{\text{start}} = (P \times t_{\text{start}}) \div \eta m \tag{35}$$

Table 52 — Variables of Equation 35

Symbol	Meaning	Unit
E_start	energy consumed by all the start-ups of the period	kWh
P	nameplate power of the pump set, which is shaft power	kW
t_start	total start-up time accumulated in the period	h
η_m	efficiency of the electric motor	dimensionless

The pump efficiency is absent from Equation 35 for the physical reason that distinguishes it from the previous ones: during start-up there is no useful flow, and therefore no hydraulic loss to deduct. The motor draws energy from the socket, and that is all the utility's meter records.

The annual energy of the pump set is the sum of the two parts: that of the actual pumping, which depends on the volume lifted, and that of the start-ups, which depends on the number of starts.

$$E_{\text{yr}} = e \times V_{\text{pump}} + (P \times t_{\text{start}}) \div \eta m \tag{36}$$

Table 53 — Variables of Equation 36

Symbol	Meaning	Unit
`E_yr`	electrical energy consumed by the pump set in the year	kWh/year
`e`	specific energy consumption per volume pumped	kWh/m³
`V_pump`	volume pumped in the year	m³/year
`P`	nameplate power of the pump set, which is shaft power	kW
`t_start`	total start-up time accumulated in the year	h/year
`η_m`	efficiency of the electric motor	dimensionless

The nameplate power of a pump set is the mechanical power at the shaft, not the electrical power recorded by the meter (Figure 21). For illustration, a pump set of 0.37 kW (0.5 hp) at the shaft with a motor of 60% efficiency draws about 0.62 kW from the mains: calculating the energy with the nameplate power would underestimate consumption by about 40%, and the energy running cost is precisely the part that reduces the saving of the system.

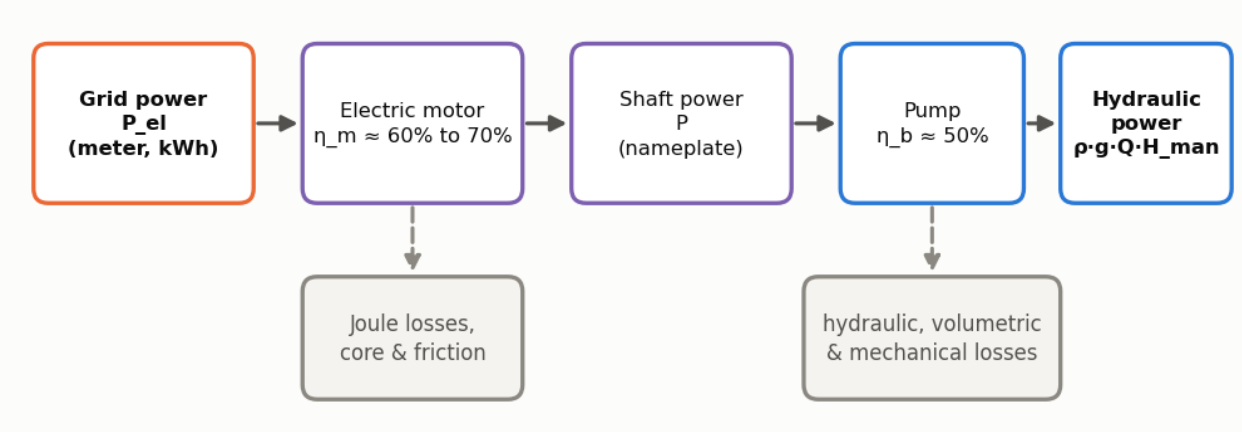


Figure 21 — Energy chain of pumping. The nameplate power is the power at the shaft, in the middle of the chain: between it and the energy meter is the motor efficiency, η_m, and between it and the hydraulic power delivered to the water is the pump efficiency, η_b.

The hydraulic power depends on the manometric head, which adds the head losses of the flow to the geometric difference in level between the water surfaces (Figure 22). Head loss is the energy dissipated per unit weight of fluid and has two parts: the continuous loss, along the pipe, given by the Darcy-Weisbach equation, `h_f = f · (L/D) · v²/2g`, where `f` is the friction factor, `L` the length, `D` the internal diameter and `v` the mean velocity; and the local losses in fittings, valves and bends, `h_loc = K · v²/2g`, where `K` is the coefficient of the singularity. In short building rising mains, the losses typically add 10% to 30% of the geometric difference in level.

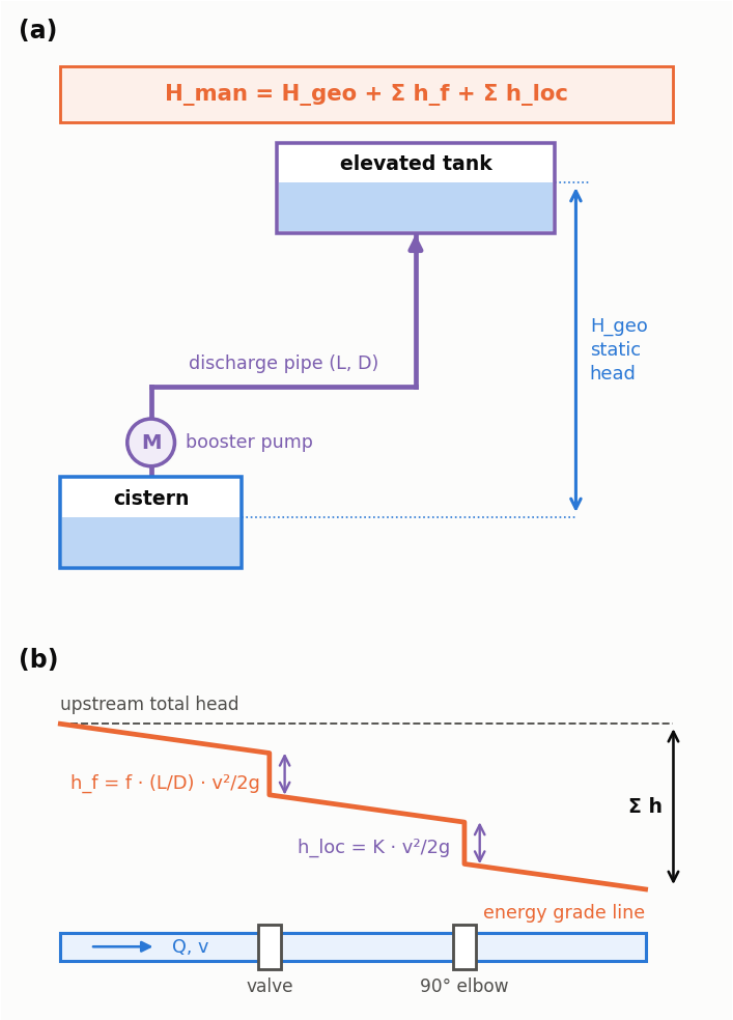


Figure 22 — (a) Manometric head of a building rising main: geometric difference in level between the water surfaces of the cistern and the upper tank, plus the head losses; (b) energy line along a stretch of pipe, with the continuous friction loss (h_f) and the local losses at a valve and an elbow (h_loc).

2.6.3. The motor efficiency

Enter the motor efficiency printed on the nameplate or on the manufacturer's data sheet. It is the number that separates the shaft power from the power actually drawn from the mains, and it carries over entirely to the energy running cost: between a standard small single-phase motor and a high-efficiency one the difference can be several percentage points.

The program has a fallback value for the case in which the efficiency is not entered, a conservative figure for small two-pole single-phase motors, which are what residential pump sets use. In a published study, do not rely on it: declare the efficiency you used and its origin. If your country sets minimum efficiency classes for motors, they are the natural reference for a value taken from regulation rather than from the data sheet. Small motors are less efficient than large ones (Figure 23).

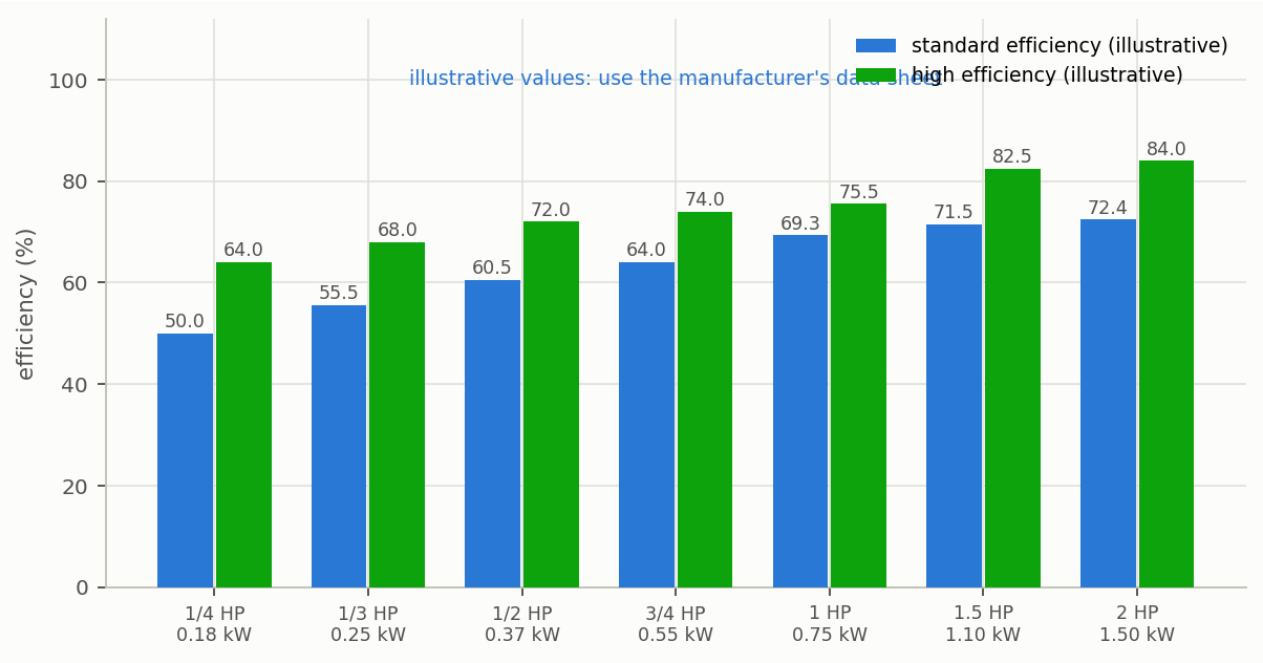


Figure 23 — Illustrative efficiency of induction motors by power for a standard and a high-efficiency class: efficiency rises with power. The values are illustrative, not from a standard; use the data sheet of the motor or the classes of the rule that applies in your country.

2.6.4. Why the complete chain matters

The tutorial's pumping to the upper tank, with the complete chain, pumps 59.4 m^3 a year in 69 starts and uses 7.7 kWh a year: 0.13 kWh/m^3. Ignoring the motor efficiency, or deducting the pump efficiency twice, changes that number by tens of percentage points, and those are precisely the two most frequent mistakes in sizing spreadsheets.

The first mistake is to treat the nameplate power as the power consumed at the socket; the second, to apply the hydraulic efficiency in a calculation that already starts from the flow actually delivered, which counts it twice. The chain presented in this section is explicit precisely to make both visible.

2.6.5. The pump sizing wizard

When the power, flow rate and manometric head of the pump set are not known, the *Pump Sizing Wizard* button, in step **4. Tank & Costs** and in the economic dialog, estimates the three values and selects a commercial model. The wizard follows the usual sizing sequence of a building rising main:

1. **Pumping flow rate.** `Q = V_sup ÷ t_fill`, with the volume of the upper tank and the desired filling time, 45 minutes by default.
2. **Economic diameter.** By Forchheimer's formula, `D = 1.3 · (t_op ÷ 24)^0.25 · √Q`, with `D` in metres, `Q` in m^3/s and `t_op` the daily operating time, 2 h by default. The diameter adopted is the smallest commercial solvent-weld PVC pipe whose internal diameter meets the calculated value, and never smaller than the outlet of the selected pump set; the suction gets one commercial size above the delivery.
3. **Velocity.** `v = Q ÷ (π · D_i² ÷ 4)`, highlighted when it falls outside the range of 0.6 m/s to 2.5 m/s.
4. **Head loss.** By the Hazen-Williams formula, `J = 10.643 · Q^1.852 · C^−1.852 · D_i^−4.87`, with `C = 140` for PVC, multiplied by the length of the piping and increased by 30% for the local losses.
5. **Manometric head and power.** `H_man = H_geo + h_f` and `P = ρ · g · Q · H_man ÷ η`, with a set efficiency of 55% by default.

6. **Selection.** The calculated operating point is compared with the curve of a candidate model, with the pump curve plotted against the calculated point. The manual's cases use generic models, without brand (see below).

The calculated manometric head and head loss go back to the project and feed the energy calculation of this section, in place of the fallback value.

2.6.6. The fallback values

Used when the project does not declare them:

Table 54 — Fallback values adopted when the project does not declare them

Parameter	Value	Origin
manometric head	12 m head	two-storey house with a buried cistern: ~8 m of geometric level difference and ~30% of head loss give 10 to 12 m; the conservative end is adopted
pump efficiency	55%	residential pump sets from half to one horsepower lie between 40% and 60% at the operating point
start-up time	108 s	see the caveat below

IN DEPTH · THE MANOMETRIC HEAD IS THE PARAMETER THAT WEIGHS MOST

Anyone who knows the project's level difference should enter it. Doubling the head doubles the energy.

IN DEPTH · THE 108 S START-UP TIME

It represents the priming time of a self-priming pump whose suction line has drained. In an installation with a foot valve in working order, the line stays primed and the following starts are immediate. With the 108 s value, the start-ups can account for a large share of the annual consumption of a pump that starts often; with a 3 s transient they would be negligible. The value is conservative and is recorded as an open issue of the program.

2.6.7. Direct pressurisation: the energy is time switched on

Everything said so far applies to pumping to a tank, in which the pump fills the upper tank in one go, at its own flow rate, and switches off. The pressure pump works another way. It starts at each flush and stays on while the toilet cistern fills, and it is the cistern's float valve, not the pump, that decides the flow. A larger pump does not fill the cistern faster: it stays on for the same time, drawing more power.

That is why the program does not calculate the energy of the pressure pump by the specific energy `ρ·g·H/(η_b·η_m)`, which assumes the pump at its best-efficiency point. It calculates it by the time switched on:

$$E = (P \div \eta m) \cdot [V \div \min(Q_{\mathrm{b}}(H), Q_{\mathrm{p}}) + N \cdot t_{\mathrm{r}}] \tag{37}$$

Table 55 — Variables of Equation 37

Symbol	Meaning	Unit
E	annual energy of the pressure pump	kWh/year
P	nameplate power, at the shaft	kW
η_m	motor efficiency, from the data sheet	dimensionless
V	rainwater volume consumed	m³/year
Q_b(H)	flow rate of the model's curve at the working pressure H	m³/h
Q_p	flow rate of the point of use	m³/h
N	starts per year: residents × 5.05 flushes × 365.25	1/year
t_r	switch-off delay of the electronic control	h

It is the form of the «simple method» Ward, Butler and Memon (2012) describe, power times operating duration, with two corrections: the effective flow rate is the smaller of that of the pump and that of the point, and the delay of electronic controls enters at each start. The nameplate power is that of the nominal point, and at low flow the motor draws a little less; the estimate tends to overestimate the energy, but it ranks the models among themselves.

The default point flow rate is 0.15 L/s, that is, 9 L/min, a typical figure for filling a toilet cistern; anyone with the toilet manufacturer's figure, or with the flow rates the design rule of the building sets for the points of use, should use it.

2.6.7.1. The generic models

The manual does not use manufacturers' catalogues. It compares six **generic** pressure pumps, named A to F, with illustrative curves that are not those of any product. Each is defined by its nameplate power, its control (pressure switch, flow switch or electronic) and its flow × pressure curve. For a real model, the «Custom» option asks for the nameplate power, the flow rate read on the manufacturer's curve at the working pressure and the switch-off delay.

The table applies the six generic models to the tutorial's direct pressurisation: the 4,000 L cistern without an upper tank, four residents and the toilet flow rate of 9 L/min.

Table 56 — Annual energy of six generic pressure pumps (illustrative curves, no brand) in the tutorial direct pressurisation, with the toilet flow limiting the pump flow

Model	Control	Curve flow at 18 m head	Hours per year	kWh per year	kWh/m³	kWh per year at 24 m head
Model A, 0.25 hp	pressure switch	10.1 L/min	109	40.0	0.68	250.3
Model B, 0.33 hp	flow switch	18.0 L/min	109	48.1	0.82	not reached
Model C, 0.5 hp	pressure switch	27.5 L/min	109	66.2	1.13	66.2
Model D, 0.5 hp	pressure switch	26.0 L/min	109	66.2	1.13	66.2
Model F, 0.5 hp	electronic	12.8 L/min	109	66.2	1.13	not reached
Model E, 0.5 hp	electronic	7.0 L/min	160	97.6	1.66	not reached

At 18 m head, five of the six models deliver more than the toilet's 9 L/min, and all stay on for the same 109 hours a year. What separates them is the power: Model A, of 0.25 hp, uses 40.0 kWh, and the 0.5 hp ones, 66.2 kWh. The sixth, Model E, delivers 7.0 L/min at 18 m, below the point flow rate; it works at the end of its

curve, stays on for 160 hours and uses 97.6 kWh a year.

At 24 m head the order reverses. Model A, the cheapest to run at 18 m, rises to 250.3 kWh a year, because its flow falls and it stays on much longer; Models C and D stay at 66.2 kWh; and Models B, E and F do not reach the pressure. The best becomes a 0.5 hp one. The rule the table teaches is to choose the smallest model that delivers the point's flow rate at the working pressure, and it is what good practice asks for: that the energy consumption of pumping and pressurisation be minimised by the choice of pump, among the alternatives considered. The screen points to that model and shows the energy of all the others next to it.

> **Two pumps, not one.** Rules for pumping and pressurisation systems commonly call for at least two pumps, operating independently. The tutorial follows that practice, and the investment counts the duty pump and the standby (two pumps, at an illustrative US$ 250 each, not a market price).

2.6.8. Why the energy of pumping to a tank is small, and that of the pressure pump is not

Lifting one cubic metre twelve metres costs about 0.033 kWh of hydraulic energy. With the two efficiencies and the start-ups, the tutorial's pumping to the upper tank comes to 0.13 kWh per cubic metre (7.7 kWh for 59.4 m^3 a year).

Direct pressurisation of the same project uses 0.68 to 1.66 kWh/m^3, depending on the model: five to thirteen times more. The numbers reproduce a difference the literature had already measured. In the review by Vieira et al. (2014), the median of the theoretical studies was 0.20 kWh/m^3, and that of the empirical ones, 1.40 kWh/m^3, because the former ignored the start-ups, standby mode and the real efficiency of motor and pump. The same review reports 1.70 kWh/m^3 to feed a toilet cistern directly with a 450 W pump, and a mean of 1.52 kWh/m^3 in nineteen Australian homes with direct feed.

The tutorial's pumping stays close to the theoretical median because it works as the theoretical studies assume: few starts per year, at the pump's own flow rate. The pressure pump falls in the empirical range because it works as the measured homes do: one start per use, at the flow rate of the point.

Even so, the energy is small compared with the saving on the bill. At an illustrative electricity price of US$ 0.20 per kWh (illustrative, not a market price), the 40.0 kWh of the smallest pressure pump cost US$ 8 a year, and even the 250.3 kWh of the same pump at 24 m cost about US$ 50, against an annual water saving of US$ 290.53 in the tutorial. The argument that «pumping uses more than it saves» does not hold in small buildings, but the choice of arrangement and model can multiply the energy part by ten, and it is that part that weighs in the carbon of section 2.8.

In a tall building, with thirty metres of pumping, the calculation changes, and it is worth redoing it.

2.7. Economic analysis and tariff regimes

> This section formalises the cash flow and details the six tariff regimes — the data that most decides the viability of a rainwater system.

2.7.1. The saving is the difference between two bills

The program does not calculate the saving by multiplying the volume saved by a mean tariff, and the distinction is not one of refinement: it is one of order of magnitude. For each month of the projection it builds two complete bills, one with the consumption the building would have without the rainwater system and another with the potable water actually bought, and takes the difference between them.

$$S_{\mathrm{mo}} = F(V_{\mathrm{tot}}) - F(V_{\mathrm{pot}}) \tag{38}$$

Table 57 — Variables of Equation 38

Symbol	Meaning	Unit
`S_mo`	saving obtained in the month	currency
`F(·)`	function that calculates the water and sewage bill for a volume	currency
`V_tot`	monthly volume the building would consume without the rainwater system	m³
`V_pot`	monthly volume of potable water actually bought from the mains	m³

The reason for proceeding this way lies in the structure of the tariff: progressive blocks, a sewage part that follows the water part, a standing charge that does not respond to consumption. The cubic metre no longer consumed is always the last one on the bill, which is the most expensive in a progressive tariff, and never the mean one. In the New York tutorial, the monthly saving of US$ 24.21 for 4.95 m³ is US$ 4.89 per cubic metre, because each cubic metre saved earns both the water charge and the sewer charge, which is a percentage of it. Multiplying the volume saved by the water price alone would understate the saving by more than half.

2.7.2. The water and sewage bill

The tariff structure of each city is represented in the program by a sequence of blocks, and each block is a quadruple made up of the minimum volume, the maximum volume, a value and a code. The code is what gives meaning to the value, because apparently similar structures charge in very different ways.

Before the codes, it is worth seeing what the bill is made of. The monthly water and sewage bill is the sum of parts that behave differently: a fixed part, which does not respond to consumption; one or more consumption blocks, in which the price per volume applies to the volume allocated within each block; and sewage, which is often a percentage of the water charge and therefore follows everything it does. Saving water affects each of these parts in a different way, and it is this asymmetry that Figure 24 shows.

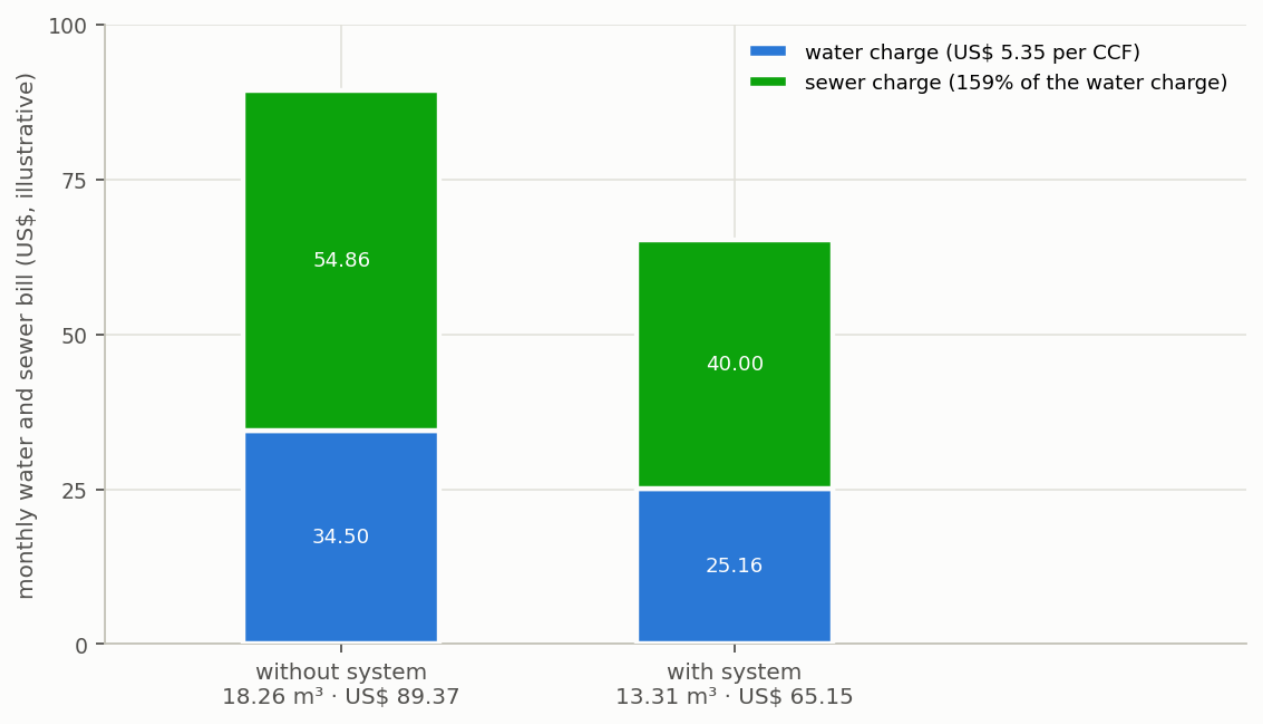


Figure 24 — Monthly water and sewage bill of the tutorial project, broken down into parts, without and with the system. The availability charge is identical in both cases; the reduction occurs in the upper consumption blocks, which have the highest price per cubic metre, and extends to sewage, charged as a percentage of the water charge.

The code of each block defines how its value is applied (Figure 25). In the consumption blocks, code 1 or 0, the price per volume is charged on the volume allocated within each block; in the availability charge, code −1, the fixed value is added to the consumption part; in the retroactive allowance, code −2, consumption above the allowance makes the whole volume be billed from 0 m^3; in the payment floor, code −3, the declared value is the lower limit of the bill; and in the exponential formula, code 2 holds the base price and the code 3 rows hold the table of exponents.

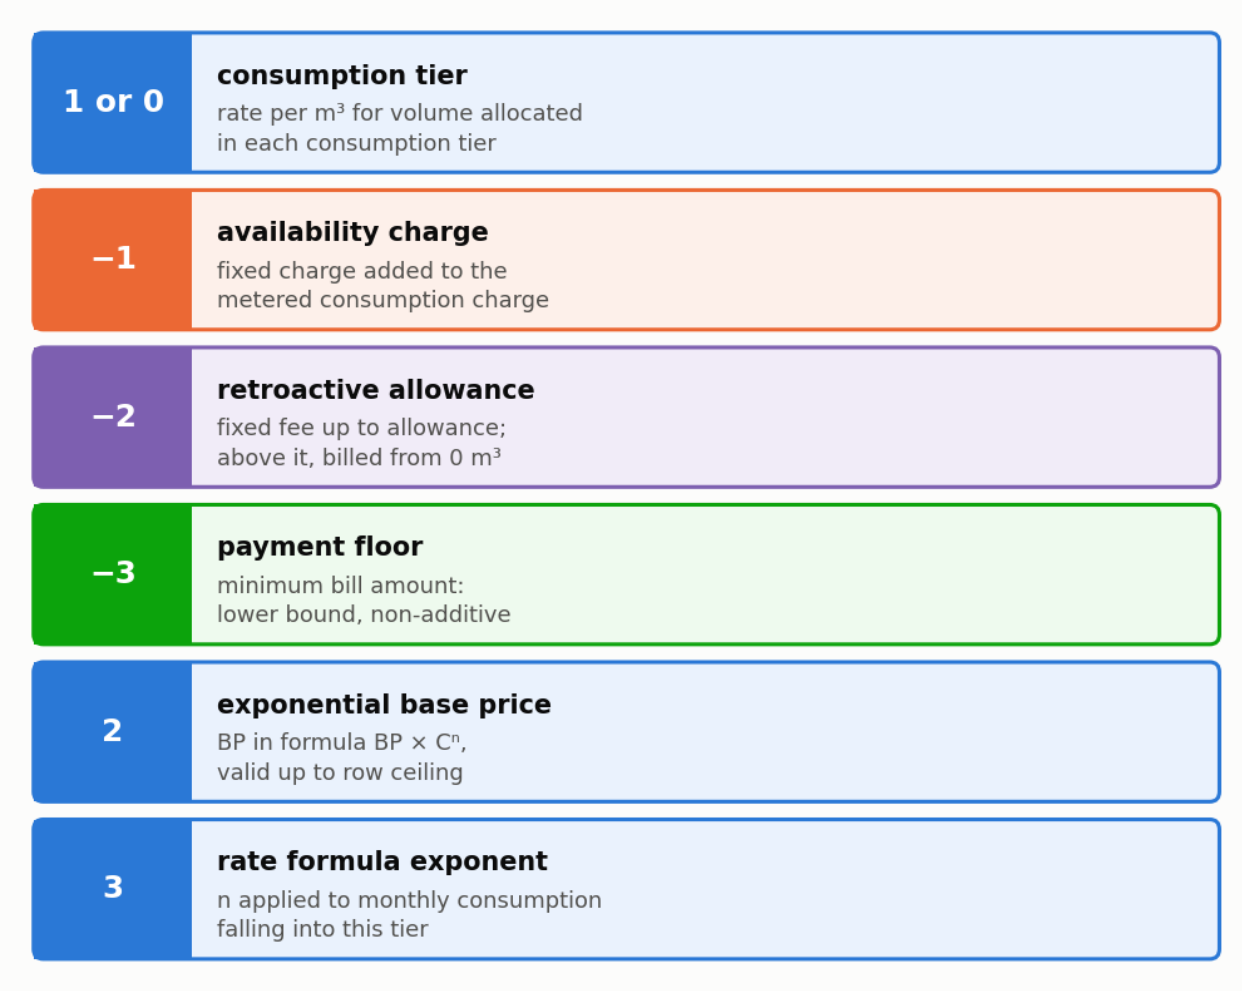


Figure 25 — The six tariff block codes and the effect of each one on the monthly water and sewage bill. Two structures with the same numerical values result in different bills depending on the code of each block.

Two of these regimes are often confused with each other, although they have opposite effects on the viability of a rainwater system. It is worth examining them with numbers.

- **The availability charge adds.** A consumption part of 55 currency units plus 46 of availability charge gives a bill of 101, and saving 15 of consumption leaves the bill at 86.
- **The floor limits from below.** With a floor of 40 and a billed consumption of 55, saving up to 15 **reduces nothing**.

The difference between the two regimes decides whether each cubic metre saved earns a discount from the first one or whether the saving only starts to count after a threshold is passed, and a viability study that confuses them reaches inverted conclusions. That is why the program codes the regime explicitly instead of treating it as a detail of the table.

2.7.2.1. The exponential formula

Some utilities do not charge water as a sum of blocks but as a power of the month's consumption:

$$B_{\text{water}} = \text{PB} \times C^{n} + \text{SB} \tag{39}$$

Table 58 — Variables of Equation 39

Symbol	Meaning	Unit
`B_water`	water part of the bill	currency
`PB`	base price	currency/m³
`C`	consumption of the month per dwelling unit	m³
`n`	exponent from the utility's table of exponents for consumption `C`; 1.00 up to a threshold, and rising above it	dimensionless
`SB`	basic service charge	currency

The exponent is read from the **total** consumption of the month and applied to the whole volume. Where the table ends with a cap, the program represents it with an ordinary block from there on. The monthly saving is the difference between the two bills, `PB × (C₁^n1 − C₂^n2)`, each consumption with its own exponent, and not the product of a unit price by the volume saved; with `n` above 1, the cubic metre saved is worth more than the base price.

Because the meter bills whole cubic metres and the fraction carries over to the next reading, a simulation's fractional average consumption is charged along the straight line between the bills of the two neighbouring integers. Without this rule the exponent would jump inside the cubic metre, and the value of the cubic metre saved would swing with the decimal place of the average consumption. None of the three example cities uses this regime.

2.7.2.2. Individual metering

In multi-family buildings with individual metering, consumption is evaluated at the level of a single dwelling unit and the result is multiplied by the number of units. The treatment matters because of progressiveness: a building of twenty flats treated as a single consumer would fall entirely into the most expensive block of the table, and the resulting saving would come out grossly overestimated, because each cubic metre saved would be valued at a tariff none of the twenty units actually pays.

2.7.2.3. Sewage

$$B_{\text{sew}} = B_{\text{water}} \times s \tag{40}$$

Table 59 — Variables of Equation 40

Symbol	Meaning	Unit
`B_sew`	sewage part of the bill	currency
`B_water`	water part of the bill, already calculated by the progressive blocks	currency
`s`	sewage percentage charged by the utility	dimensionless

The sewage percentage applies to the water part of the bill, not to the total bill, and confusing the two denominators doubles or halves the part calculated. One hundred per cent means that the sewage part equals the water part, and therefore that sewage accounts for half of the total bill. In New York the percentage is 159%, so that the sewer part is the larger of the two.

There are two more modes: sewage charged **per cubic metre consumed**, `B_sew = C × p_sew`, as in London, and sewage charged **by blocks of its own on a fraction of the water volume**, as in Cape Town (70% of the water consumed, four steps). With the exponential formula, the per cubic metre mode has no basic service charge and no exponent, and applying the percentage on the water part there would charge sewage on the basic service and on the power.

2.7.3. The six regimes

The program distinguishes six minimum-charge regimes, and which one applies to a building is a fact about its tariff document, not a choice. The table below shows how each regime is coded and applied in the calculation of the bill. The three example cities fall in two of them: London and Cape Town have an availability charge (a standing charge), and New York has a payment floor in the form of a minimum daily charge, which does not bind at the tutorial consumption. The other three regimes are supported by the engine and described in section 3.3 (Figure 26).

Table 60 — Coding and application of each minimum-charge regime in the calculation of the bill

Regime	Coding of the blocks	Calculation of the water part	Effect of reducing consumption
no minimum charge	consumption blocks only (code 1 or 0)	sum, in each block, of the price per m³ applied to the volume allocated within it	every reduction in consumption reduces the bill
availability charge	fixed value (−1) and consumption blocks from 0 m³, with a positive price	fixed value added to the consumption part, billed from the first m³	every reduction in consumption reduces the bill; the fixed value remains
allowance within the minimum	fixed value (−1) and a first block from 0 to N m³ at a zero price	fixed value that includes the N m³ of the allowance; above them, consumption blocks	a reduction below N m³ does not change the bill
retroactive allowance	allowance (−2) from 0 to N m³ with a fixed value, and consumption blocks	up to N m³, fixed value; above, the whole volume billed from 0 m³ by the blocks	reducing consumption to N m³ or less replaces the consumption part by the fixed value
payment floor	floor (−3) and consumption blocks	consumption part by the blocks, limited from below to the value of the floor	a reduction that takes the part below the floor does not reduce the bill
exponential formula	basic service (−1), base price (2) and table of exponents (3) covering all consumption	basic service added to $PB \times C^n$, with n from the whole month's consumption	every reduction in consumption reduces the bill, by the difference between the two powers



Figure 26 — Distribution of the example tariffs among the six tariff regimes. The allowance within the minimum is the regime in which reducing consumption below the allowance does not reduce the bill; none of the three example cities has it.

Section 3.3 presents the numerical example that compares an allowance regime with an availability charge, from which follows the most important practical lesson of this section: under an allowance regime, saving water below the allowance volume earns no discount at all on the bill.

2.7.4. The investment

$$\mathrm{CAPEX} = C_{\mathrm{cist}} + C_{\mathrm{sup}} + C_{\mathrm{lab}} + C_{\mathrm{pipe}} + C_{\mathrm{acc}} + (C_{\mathrm{pump}} \times n_{\mathrm{b}}) + \mathrm{CAPEX}_{\mathrm{inc}} \tag{41}$$

Table 61 — Variables of Equation 41

Symbol	Meaning	Unit
`CAPEX`	total initial investment of the system	currency
`C_cist`	cost of the lower tank	currency
`C_sup`	cost of the upper tank, when there is one	currency
`C_lab`	cost of installation labour	currency
`C_pipe`	cost of the piping	currency
`C_acc`	cost of the accessories	currency
`C_pump`	unit cost of the pump set	currency
`n_b`	number of pump sets, including the standby when there is one	unit
`CAPEX_inc`	incremental investment of the treatment line, including the first flush when sized	currency

In this edition a new project starts with every term at zero: the program carries no price list, so `C_cist`, `C_sup`, `C_lab`, `C_pipe`, `C_acc` and `C_pump` are the values you type in the economic step, and `CAPEX_inc` is zero until the treatment line is priced. The bill of quantities of the 3D layout (section 3.9) does not set prices in this edition: the automatic budget of the layout and the automatic labour are off. The manual's tutorial uses round figures, stated as illustrative, not market prices. Section 4.7 lists what a new project contains and what is left for you to enter.

The last term follows the incremental rule of section 2.5 and includes, when the physical sizing of the first flush is enabled, the first-flush chamber and the leaf separator; the annual running cost of that subsystem enters the running cost of the treatment line.

Tank prices are typed in. For the tutorial the author used a simple rule, a fixed part plus a price per litre for each material, with round figures that are illustrative and not market prices: polyethylene 100 plus 0.55 per litre, concrete 600 plus 0.40, fibreglass 120 plus 0.65 and stainless steel 300 plus 2.00, in US$. With it a 4,000 L polyethylene cistern costs US$ 2,300 and a concrete one US$ 2,200; with the labour, the piping, the accessories and the two pumps, the investment of the tutorial is US$ 6,250 (illustrative, not a market price). The program does not apply this rule or any price table: the cistern price you type is used as it stands for the volume analysed and, in the volume sweep, for every volume, so the program neither interpolates nor extrapolates a price. Section 4.7 explains the consequence for the volume curve.

The make-up of the investment surprises those who come to the subject expecting the tank to dominate the bill. In small residential volumes it weighs less than labour and piping, and only comes to dominate when the volume grows enough for the price of the tank to exceed the fixed sum of the installation. The design consequence is direct: doubling the tank does not double the investment, and that non-linearity is part of the reason why the net present value curve has an interior maximum (Figure 27).

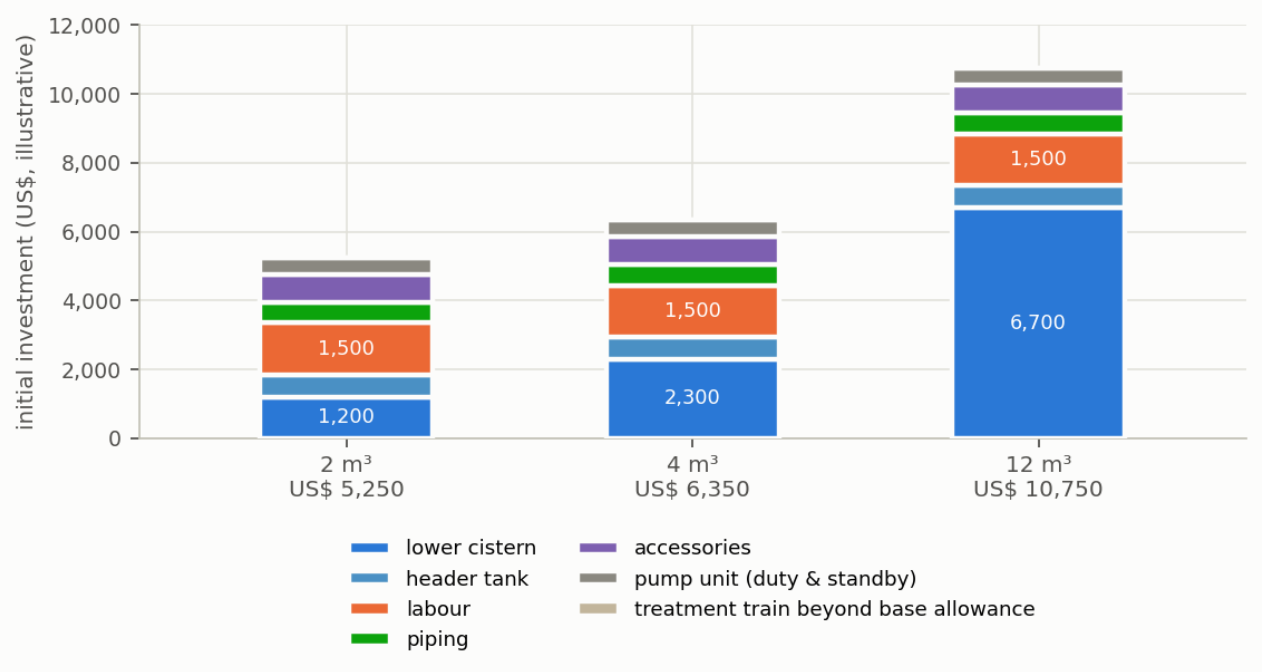


Figure 27 — Initial investment broken down into the seven items the program adds up, for three volumes of polyethylene tank. With the costs the tutorial declares, only the lower tank grows with the volume; upper tank, labour, piping, accessories, pump sets and treatment line do not change. The treatment line enters for what it adds beyond the filtering allowance already built into the accessories, so as not to count the filter twice. In a new project, piping and accessories come from the 3D layout, which has no such allowance, and labour follows the materials of each volume.

2.7.5. The annual running cost

Table 62 — Parts of the annual running cost and the origin of each one

Part	Origin
pumping energy	section 2.6, at the electricity tariff entered
chlorination	mass of **product**, not of active chlorine
treatment plant	incremental running cost, without counting chlorination twice
first flush	annual maintenance of the first-flush chamber and of the leaf separator, when sized
declared operating costs	the user's free list

The electricity tariff is typed in, in the currency of the project. In the manual's tutorial it is US$ 0.20 per kWh, illustrative, not a market price.

2.7.6. The month-by-month projection

The projection is made month by month over the whole analysis period, and applies to each part the inflation and adjustment factors defined below.

The result of this projection is a monthly series of balances, and what matters in it is the moment the cumulative balance stops being negative. That moment is the payback time. Figure 28 aggregates the projection by year: in columns, the saving on the water and sewage bill and the costs, with the investment in year zero; as a line, the discounted cumulative balance, which crosses zero at the payback time.

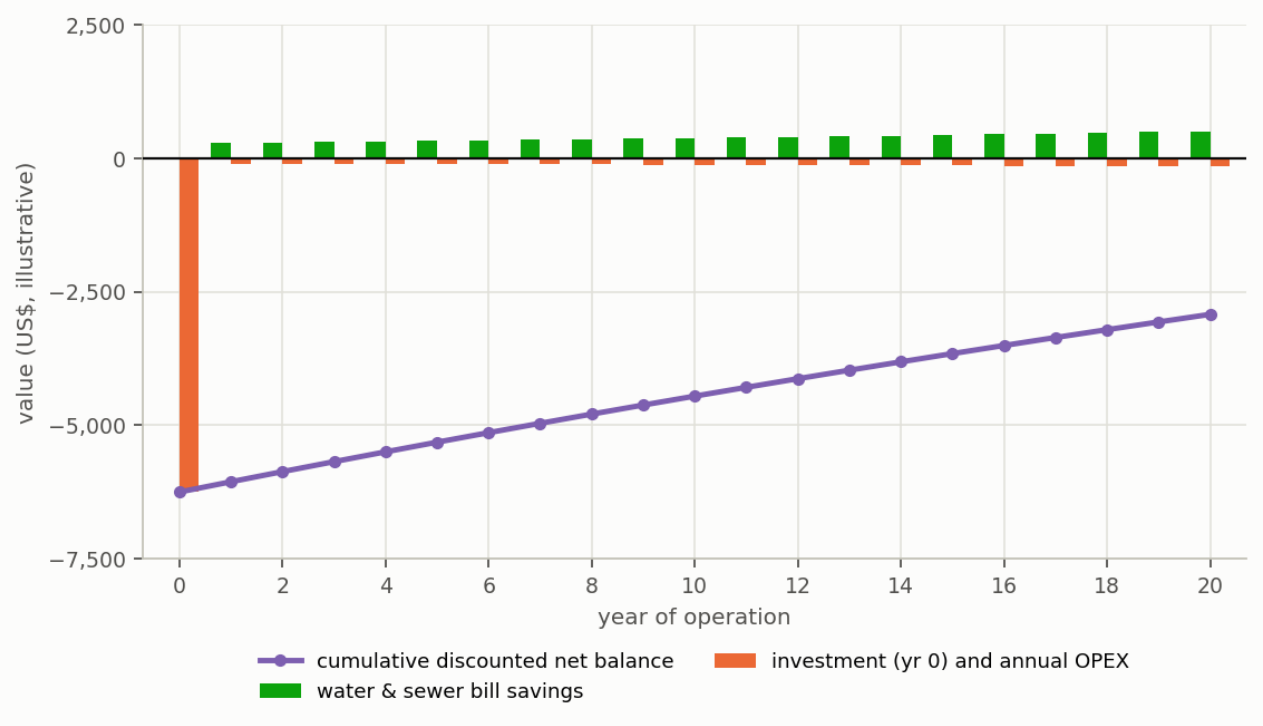


Figure 28 — Cash flow of the tutorial project over twenty years: annual saving on the water and sewage bill and annual costs, with the initial investment in year zero, in nominal values; and cumulative balance discounted at the minimum attractive rate of return, which does not cross zero within the twenty years: there is no payback. 4,000 L concrete cistern with an upper tank, as in section 4.7; costs illustrative, not market prices.

Inflation applies only to the running cost:

$$f_{\mathrm{inf}} = (1 + i)^{m - 1} \tag{42}$$

Table 63 — Variables of Equation 42

Symbol	Meaning	Unit
`f_inf`	cumulative inflation factor up to month `m`	dimensionless
`i`	declared monthly inflation rate, as a fraction: 0.35% a month enters as 0.0035	dimensionless
`m`	month of the cash flow, counted from 1	month

Tariff adjustments apply only to the bill, in steps:

$$k = \lfloor (m - 1) \div I \rfloor \tag{43}$$

$$f_{\mathrm{j}} = (1 + r_{\mathrm{j}})^{k} \tag{44}$$

Table 64 — Variables of Equation 44

Symbol	Meaning	Unit
k	number of adjustments already applied up to month m	dimensionless
m	month of the cash flow, counted from 1	month
I	interval between adjustments, typically 12	month
	integer part of the division	—
f_j	cumulative adjustment factor of part j	dimensionless
r_j	adjustment rate of part j, which can be water, sewage or energy	dimensionless

Equation 44 is applied separately to each of the three parts, with rates of their own, and the following remark is about that separation.

> **Water and sewage are adjusted by separate indices**, not by a single index on the aggregate bill. The two parts are the subject of separate acts of the utility, and treating them together indexes half the bill by the wrong index.

A tax or fee incentive for rainwater systems, where one exists and the user enters it, can be added to the cash flow as an annual saving divided by twelve, which spreads it evenly over the months of the year. The simplification is deliberate: such a discount is usually granted all at once, but spreading it keeps the cash flow from showing a step that has nothing to do with the performance of the system. The manual's cases enter no such incentive.

2.7.7. The indicators

Net present value:

$$\mathrm{NPV} = -\mathrm{CAPEX} + \sum [\mathrm{CF_m} \div (1 + \mathrm{MARR})^{m}] \tag{45}$$

Table 65 — Variables of Equation 45

Symbol	Meaning	Unit
NPV	net present value of the investment	currency
CAPEX	total initial investment, from Equation 41	currency
CF_m	net cash flow of month m	currency
MARR	monthly minimum attractive rate of return, as a fraction: 0.5% a month enters as 0.005	dimensionless
m	month of the cash flow, from 1 to the end of the analysis period	month

Internal rate of return: the rate that makes the NPV zero. When there is no real root — which happens when the flow never becomes positive — the program returns null, instead of an invented number.

Discounted payback: the first month in which the discounted cumulative balance crosses zero. When it never does within the analysis period, the program reports «no payback».

What the tutorial shows. With the New York tariff and the illustrative costs of the manual, the tutorial (a 4,000 L concrete cistern with the 1,000 L upper tank) has an investment of US$ 6,250, an annual saving of US$ 290.53, an annual running cost of US$ 2.63, a net present value of −US$ 2,919.90 over twenty years, an internal rate of return of −1.23% a year and no payback. These costs are illustrative, not market prices, and the result is not a verdict on New York; it shows how the method works and what it takes for a rainwater

system to pay for itself. Cheap water is the reason: a saving of US$ 24.21 a month does not repay US$ 6,250 within twenty years at the minimum attractive rate adopted. The method is the same where water is dearer or the works cheaper, and the program will show that as well; enter your own tariff and costs before drawing any conclusion for a real building.

2.7.8. The fragile assumptions

Two of them deserve a sensitivity analysis, and section 3.7 shows how.

The tariff adjustment. Five per cent a year for twenty years multiplies the tariff by 2.65; three per cent, by 1.81; seven per cent, by 3.87. The saving of the last years grows in the same proportion, and that is why the adjustment is among the assumptions that most move the net present value, as the tornado of section 3.7 shows; it is also one of the most uncertain.

The service life. Twenty years is the default. A concrete cistern lasts longer; polyethylene components exposed to the sun last less. The service life enters both the analysis period and the carbon payback of section 2.8.

2.8. Life cycle assessment

> This section presents the seven stages of the inventory and the boundary adopted, and declares what is measured and what is a screening assumption.

Life cycle assessment is the method that accounts for the environmental impacts of a product over its whole existence, from the extraction of raw materials to final disposal. Applied to a rainwater harvesting system, it answers whether the carbon emitted to manufacture the tank, the piping and the pump set is offset by the carbon no longer emitted by not consuming water from the utility.

Triton's assessment is a screening one, not a full inventory. The distinction matters and the standard recognises it: a screening assessment ranks alternatives and identifies what dominates the result, whereas an inventory conforming to the ISO life cycle assessment standards documents each elementary flow with traceable provenance and undergoes external critical review. The first serves to decide between polyethylene and concrete; the second, to declare an environmental performance publicly.

2.8.1. The four phases of the standard, and where the program stands

The international standards for life cycle assessment (the ISO 14040 series) organise every life cycle assessment into four phases that feed back into one another. It is worth going through them, because each one corresponds to a decision the program has already made for you, and that a published study needs to declare.

1. Goal and scope. Defines what the study is for, the **functional unit** and the system boundary. The functional unit is the quantity of service being compared, and it is what makes different alternatives comparable. In the program, the implicit unit is the **harvesting system of a project over the adopted service life**, and the comparison is made against the supply of the same volume of water by the utility. Anyone wanting to compare with the literature can convert it to the most used unit, the cubic metre of water delivered, by dividing the balance by the volume of the service life, as Equation 51 does.

2. Inventory. Surveys the input and output flows of each process: masses of material, energy, consumables. In the program, the inventory is the masses of the components, the pumping energy, the mass of chlorine product and the volume of water replaced.

3. Impact assessment. Converts the flows into category indicators by characterisation factors. The program assesses **one** category, climate change, in kilograms of carbon dioxide equivalent, with the emission factors of appendix C.

4. Interpretation. Identifies what dominates the result, tests the sensitivity to the assumptions and draws conclusions within the limits of the scope. That is what sections 4.8 and 3.7 do with the tank material and with the other assumptions.

2.8.2. The building modules

For buildings, the life cycle is commonly subdivided into modules A to D, a nomenclature that building standards and environmental product declarations share. Declaring which modules the study covers is the shortest and most precise way of declaring the boundary, and it is what a reviewer expects to find.

Table 66 — Building life cycle modules and what the program's assessment covers in each one

Module	Stage	Covered by the program
A1 to A3	product: raw material, transport to the factory, manufacture	yes, for tanks, piping, pump sets, first flush and all the parts, fittings and cables of the 3D layout
A4 and A5	construction: transport to the site and installation	no; the excavation for the buried cistern is left out
B1 to B5	use, maintenance, repair, replacement and refurbishment	no; pump and component replacements do not enter
B6	operational energy	yes, the pumping energy
B7	operational water	yes, as the credit for the potable water avoided and the treatment consumables
C1 to C4	end of life: demolition, transport, processing and disposal	no
D	benefits and loads beyond the boundary, such as recycling	no

The reading of the table is that the program does a **cradle-to-gate assessment, plus operation**. It is the most common boundary in studies of rainwater harvesting in buildings, but not the only one, and comparing the program's balance with that of a study that includes end of life or replacements requires adjusting the boundaries before comparing the numbers.

2.8.3. The seven stages

The inventory is organised into seven stages, grouped by the nature of the emission (Figure 29). The carbon balance is the sum of the emissions of the first six minus the credit of the seventh, the only term with a negative sign, and it is this credit that decides whether the system offsets the carbon embodied in its construction.

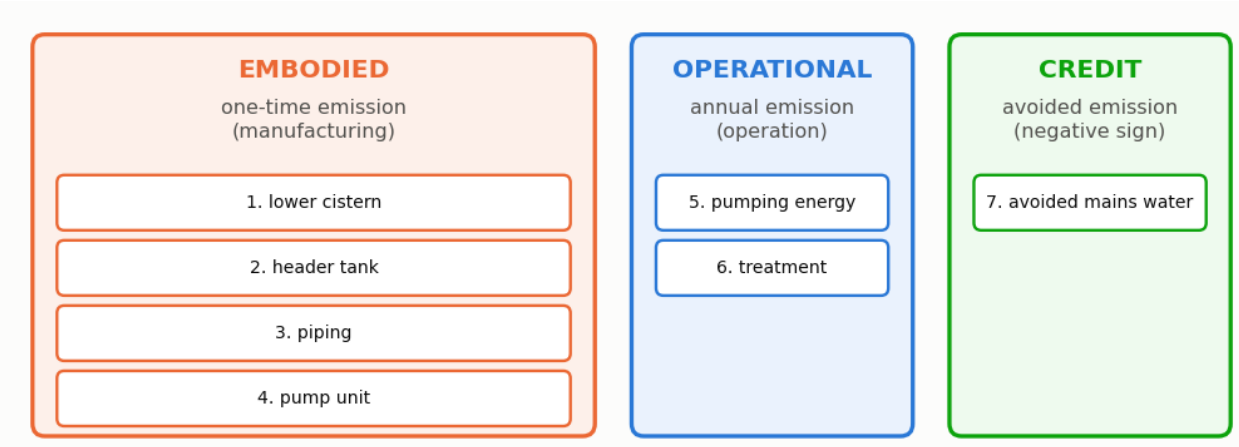


Figure 29 — The seven stages of the inventory, grouped by the nature of the emission. The first four are embodied and occur only once; the fifth and sixth are operational and repeat every year; the seventh is the credit, and it is the only one that enters with a negative sign.

The first four stages account for the **embodied carbon**, that is, the emissions that occurred in manufacturing the components, before the system goes into operation; when the physical first flush is sized, the first-flush chamber and the leaf separator are added to them. The next two account for the operational emissions, which repeat in each year of use. And the seventh is the **credit**: the emission the utility no longer generated because that water did not have to be abstracted, treated and distributed.

Volume zero without rainwater consumption represents the no-system scenario and, by construction, receives no fixed impact of tank, piping or pump set — it is the reference against which all the other

alternatives are compared.

2.8.4. Embodied carbon

$$E_{\text{comp}} = m_{\text{comp}} \times \text{EF}_{\text{mat}} \tag{46}$$

Table 67 — Variables of Equation 46

Symbol	Meaning	Unit
`E_comp`	embodied emission of the component	kg CO_2e
`m_comp`	mass of the component	kg
`EF_mat`	emission factor of the material, cradle to gate	kg CO_2e/kg

The mass of each component follows from its sizing. For the tank, it is obtained from the useful volume multiplied by the characteristic mass density of the material, which varies by more than an order of magnitude between polyethylene and reinforced concrete — and a good part of the environmental result of the project follows from that variation.

Table 68 — Mass per useful cubic metre of each tank material

Material	Mass per useful m³	What this means in 5 m³
polyethylene	22 kg/m³	110 kg
fibreglass	14.25 kg/m³	71 kg
stainless steel	38 kg/m³	190 kg
reinforced concrete	1,200 kg/m³	6,000 kg

> **Mass is carbon.** Reinforced concrete is by far the most massive material on the list, and that is why it dominates the inventory when chosen. Section 4.8 shows the consequence: with a 4,000 L concrete cistern (4,800 kg, 858 kg CO_2e embodied) the tutorial system takes 32.5 years to pay off its carbon debt, longer than the twenty-year service life, whereas with polyethylene (88 kg, 327 kg CO_2e) it takes 12.4 years. The factors behind these figures are illustrative.

2.8.4.1. The inventory of the tutorial project, item by item

The table below breaks down the carbon of the final tutorial project: a 4,000 L polyethylene cistern, a 1,000 L upper tank, two pump sets, the standard piping and the first flush.

Table 69 — Carbon inventory of the final tutorial project, item by item, with the share of each component in the embodied carbon; negative annual values are credits (illustrative grid and water factors, not measured values)

Item	Embodied	Share of the embodied	Annual
4,000 L cistern, polyethylene	141.9 kg	43.3%	—
1,000 L upper tank, polyethylene	35.5 kg	10.8%	—
PVC pipe, DN 100 mm	55.5 kg	17.0%	—
PVC pipe, DN 32 mm	3.5 kg	1.1%	—
PVC pipe, DN 25 mm	8.9 kg	2.7%	—
two pumps of 0.5 hp	61.0 kg	18.6%	—
first flush: 300 L tank and leaf separator	21.1 kg	6.5%	—
pumping energy	—	—	3.07 kg/year
tablet chlorination	—	—	0.24 kg/year
mains water avoided	—	—	−29.69 kg/year
total	**327.4 kg**	**100%**	**−26.38 kg/year**

Three readings matter. The first is that, even in polyethylene, the cistern accounts for more than two fifths of the embodied carbon (43.3%), and the tanks together for more than half (54.1%). The second is that the piping and the pump sets, which are usually forgotten in simplified calculations, add up to almost two fifths of the total: a study that counted only the tank would underestimate the embodied carbon by almost half. The third is in the annual column: the credit of the water avoided (29.69 kg a year) is about nine times larger than the annual emissions of pumping and chlorination together (3.31 kg), and that is why, with the right material, the manufacturing debt pays off.

2.8.5. Operation

Pumping:

$$E_{\text{energy}} = E_{\text{yr}} \times \text{EF}_{\text{grid}} \tag{47}$$

Table 70 — Variables of Equation 47

Symbol	Meaning	Unit
`E_energy`	annual emission of the pumping energy	kg CO_2e/year
`E_yr`	annual energy consumption of the pump set	kWh/year
`EF_grid`	emission factor of the electricity grid, by region and year	kg CO_2e/kWh

The annual energy consumption comes from the calculation presented in section 2.6, according to the supply arrangement declared, and the grid emission factor is typed in, for the place and the year of the study: the program carries no grid factor of its own in the International Edition. The manual's tutorial uses a round figure of 0.40 kg CO_2e/kWh, illustrative and not a measured value, so that the reader can follow the method; a real study takes the factor from the published inventory of the national or regional grid, states the year and shows the result for a low and a high value.

Energy is small in the program, but it is worth knowing that it tends to be larger in practice. Vieira et al. (2014), in a review of the energy intensity of rainwater harvesting systems, found a median of 0.20 kWh/m^3 in theoretical studies and of 1.40 kWh/m^3 in empirical studies, and attributed part of the difference to start-ups, standby consumption and real efficiencies worse than catalogue ones. The tutorial, at 0.13 kWh/m^3, is in the range of theoretical studies. Ghimire et al. (2014, 2017) reached a converging conclusion

by life cycle assessment: in the systems they analysed, the pump set and the pumping energy were the components that weighed most in most of the impact categories, and the pumpless version outperformed the public supply in almost all of them.

> **When energy decides.** With the illustrative grid factor, multiplying the tutorial's pumping energy by ten, taking it close to the empirical median of Vieira et al., would raise the pumping emission from 3.07 to about 30.7 kg CO_2e a year, which is more than the 29.69 kg credit of the water avoided. The annual balance would turn from a net benefit of 26.38 kg to a small net emission, and the system would never pay off its embodied carbon: it would end its life owing carbon. On grids more fossil-based than the one assumed, the effect is even larger.

Treatment: the treatment line **replaces** the chlorination term instead of adding to it. It is the same rule as in section 2.5, and it exists so that the hypochlorite is not counted twice.

2.8.6. What the boundary includes, and what it leaves out

Before discussing any emission factor, it is worth fixing the scope. The program's assessment is a **screening** one: it serves to rank alternatives against each other, not to replace a life cycle inventory conforming to ISO 14040. What enters the calculation and what is left out is declared, because an environmental balance without a declared boundary can be neither checked nor contested (Figure 30). The most limiting exclusion is that of the impact categories beyond global warming: a system with good carbon performance can perform unfavourably in another category, and the assessment does not record it.

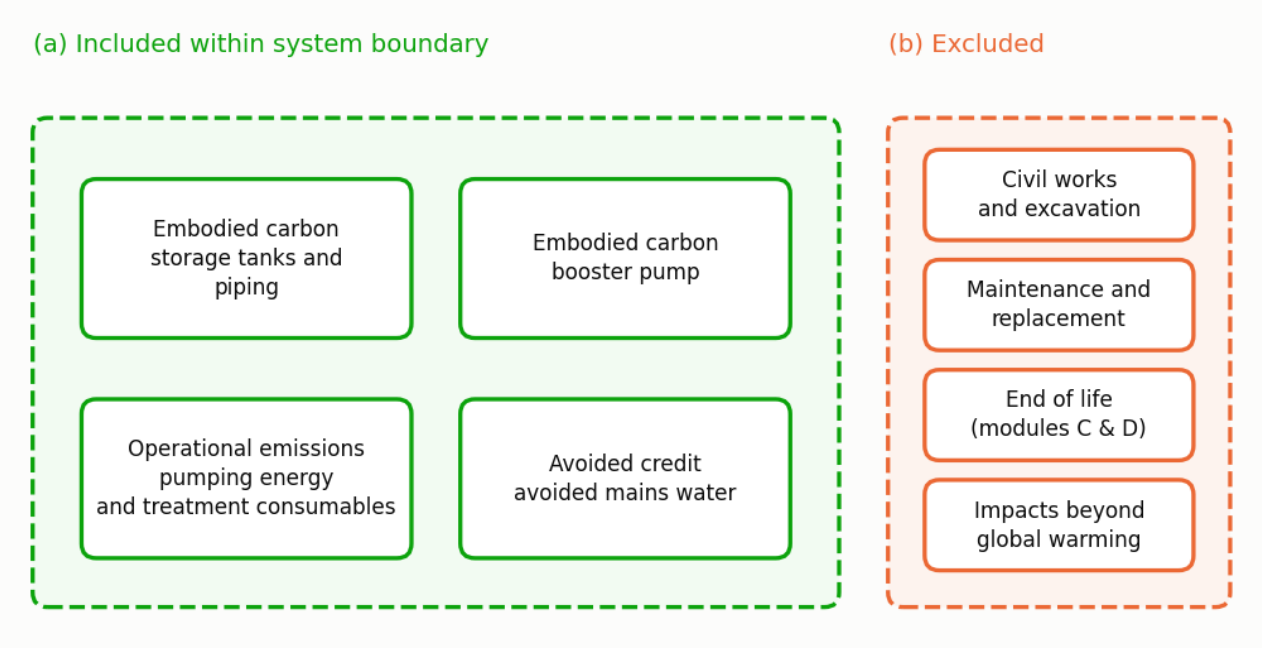


Figure 30 — Boundary of the program's environmental assessment: (a) processes included — embodied carbon of the tanks, the piping and the pump set, operational emissions of pumping and of treatment consumables, and the credit for the potable water avoided; (b) processes excluded — civil works, maintenance and replacement, end of life and impact categories beyond global warming.

2.8.7. The boundary: water delivered, not produced

The emission factor of potable water is per cubic metre **delivered to the building**, not per cubic metre produced at the treatment works.

The difference is the distribution losses, which vary from one supply system to another. If a system loses 20% between the works and the tap, producing one cubic metre delivers 0.8 (an illustrative figure, not a measured one).

A published factor at the outlet of the works, applied to the volume delivered, **underestimates the avoided emission** by the share lost. Declare whether the factor you use is per cubic metre delivered or produced, and convert it if it is not.

Appendix C lists the water production routes the program offers, with the provenance and boundary of each one.

2.8.8. The indicators

Net annual balance:

$$E_{\text{net}} = E_{\text{avoid}} - E_{\text{energy}} - E_{\text{treat}} \tag{48}$$

Table 71 — Variables of Equation 48

Symbol	Meaning	Unit
`E_net`	net annual emission balance	kg CO_2e/year
`E_avoid`	emission avoided by the utility water no longer consumed	kg CO_2e/year
`E_energy`	annual emission of the pumping energy	kg CO_2e/year
`E_treat`	annual emission of the treatment consumables	kg CO_2e/year

Carbon payback:

$$\mathrm{PB}_{\text{env}} = E_{\text{emb}} \div E_{\text{net}} \tag{49}$$

Table 72 — Variables of Equation 49

Symbol	Meaning	Unit
`PB_env`	environmental payback time of the system	year
`E_emb`	carbon embodied in the manufacture of the components	kg CO_2e
`E_net`	net annual emission balance, from Equation 48	kg CO_2e/year

When the net annual balance is not positive — a real situation, not a hypothetical one, in systems with a large concrete tank — there is no environmental payback, because the debt is never paid off. The program returns 999 years in that case, instead of infinity, so that the value can still be ranked in comparisons; the meaning, however, is that the system ends its service life owing carbon.

Balance at the end of life:

$$B_{\text{life}} = (E_{\text{net}} \times n_{\text{yr}}) - E_{\text{emb}} \tag{50}$$

Table 73 — Variables of Equation 50

Symbol	Meaning	Unit
B_life	carbon balance at the end of the adopted service life	kg CO_2e
E_net	net annual emission balance, from Equation 48	kg CO_2e/year
n_yr	service life adopted for the system	year
E_emb	carbon embodied in the manufacture of the components	kg CO_2e

Negative means the system **emitted more than it avoided** over the adopted life. It is not a theoretical hypothesis: it happens with a concrete cistern and a twenty-year service life, as section 4.8 shows.

Specific avoided emission:

$$E_{\text{spec}} = B_{\text{life}} \div V_{\text{life}} \tag{51}$$

Table 74 — Variables of Equation 51

Symbol	Meaning	Unit
E_spec	specific emission of the system over the service life	g CO_2e/L
B_life	carbon balance at the end of the service life, from Equation 50	kg CO_2e
V_life	total volume of rainwater delivered over the service life	m^3

2.8.9. What carries a screening label

Not every factor of the inventory has a primary source. The program marks those that do not, and the report shows the mark.

The masses per useful cubic metre of polyethylene, concrete and stainless steel, which are still geometric scenarios, carry the label, as does any factor typed in without a source. The default emission factors have declared provenance; the last to receive it was that of **hypochlorite**, which now comes from Ecoinvent 3.8: as the database has no calcium hypochlorite, the program uses the sodium one on an active-chlorine basis, 2.65 kg CO_2e per kg, which gives 1.72 kg CO_2e per kg of 65% tablet. The manufacturing emission of the pump set, which until the September 2026 revision was an arithmetic extrapolation in four of the six power ratings, now combines the catalogue mass with the intensity of an environmental product declaration; it is an order-of-magnitude approximation, and appendix C declares the caveat.

> **In a published study, declare which factors carry a screening label.** An inventory that presents all factors with the same degree of confidence hides where the weakness lies.

2.8.10. What the literature shows

Life cycle assessment of rainwater harvesting systems is an active field without a single method. Vaz et al. (2023), in an integrative review conducted under the PRISMA protocol, concluded that residential buildings are the most studied case, but that there is no consensus on a uniform analytical framework; that several benefits of rainwater, such as runoff reduction, rarely enter the assessment; and that integration with life cycle costing is a promising way of showing the benefits more directly.

Marinoski and Ghisi (2018) assessed a social housing unit and compared fibreglass, high-density polyethylene and reinforced concrete tanks. The fibreglass ones were the most favourable from the environmental point of view, and the concrete ones, from the point of view of investment. The result

converges with that of section 4.8 in the essentials: the tank material weighs on the carbon, and the environmental and economic dimensions can point in different directions.

Ghimire et al. (2017), comparing a commercial system with the municipal supply in eleven impact categories, showed something else this assessment does not reach: the rainwater system outperformed the municipal one in ten of the eleven categories, but not in all, and the result of each category depended on the energy intensity of pumping. It is the strongest argument for declaring that the program's assessment covers a single category.

2.8.11. What the assessment does not cover

- **end of life.** There is no credit for recycling nor burden for disposal. The boundary is cradle to gate plus operation.
- **excavation and civil works.** The earthworks of the buried cistern do not enter.
- **maintenance.** Component replacements over the service life do not enter.
- **impacts beyond carbon.** There is no eutrophication, acidification, land use or toxicity. It is an assessment of **one** impact category.

The last point is the most important. A system with good carbon performance can perform poorly in another category, and this assessment would not see it.

2.9. Certifications

> This section gathers the qualification rules of the sustainability rating systems the program assesses and distinguishes, in each one, what is a requirement of the rating system from what is a criterion adopted by the program.

Rainwater harvesting systems appear in practically every environmental certification system for buildings, and in each one with a metric of its own. Some measure the saving against the total consumption of the building, others against a reference baseline, and others still require the comparison in more than one dimension at once. The program calculates the qualification in the international rating systems below from the simulation results, and always with the same caveat: the program shows where the project would qualify, and certifies nothing. Certification is decided by the certification body, with the complete documentation of the development, of which water performance is only one piece.

The International Edition shows LEED, EDGE and GRI only. National rating systems are not built in; where a project is bound to one, take its saving from the simulation and apply that system's own rules outside the program.

Before going through them one by one, it is worth seeing them side by side. The thresholds of each rating system are on scales that seem incomparable while they stay in separate tables, and become comparable when placed on the same saving ruler (Figure 31). The thresholds below are those coded in the program; confirm them against the current text of each rating system before citing them. LEED v4 scores the reduction of outdoor use (WEc1: 1 point from 50% and 2 points at 100%) and of indoor use (WEc2: 1 to 6 points between 25% and 50%) separately; LEED v5 gathers the category in credit WEc2, in which the reduction in fixtures and fittings is worth 1 to 3 points between 30% and 40% and the reduction of the whole project, 1 to 8 points between 30% and 65%; and EDGE requires a minimum reduction of 20% at the same time in water, energy and the energy embodied in materials, without points.

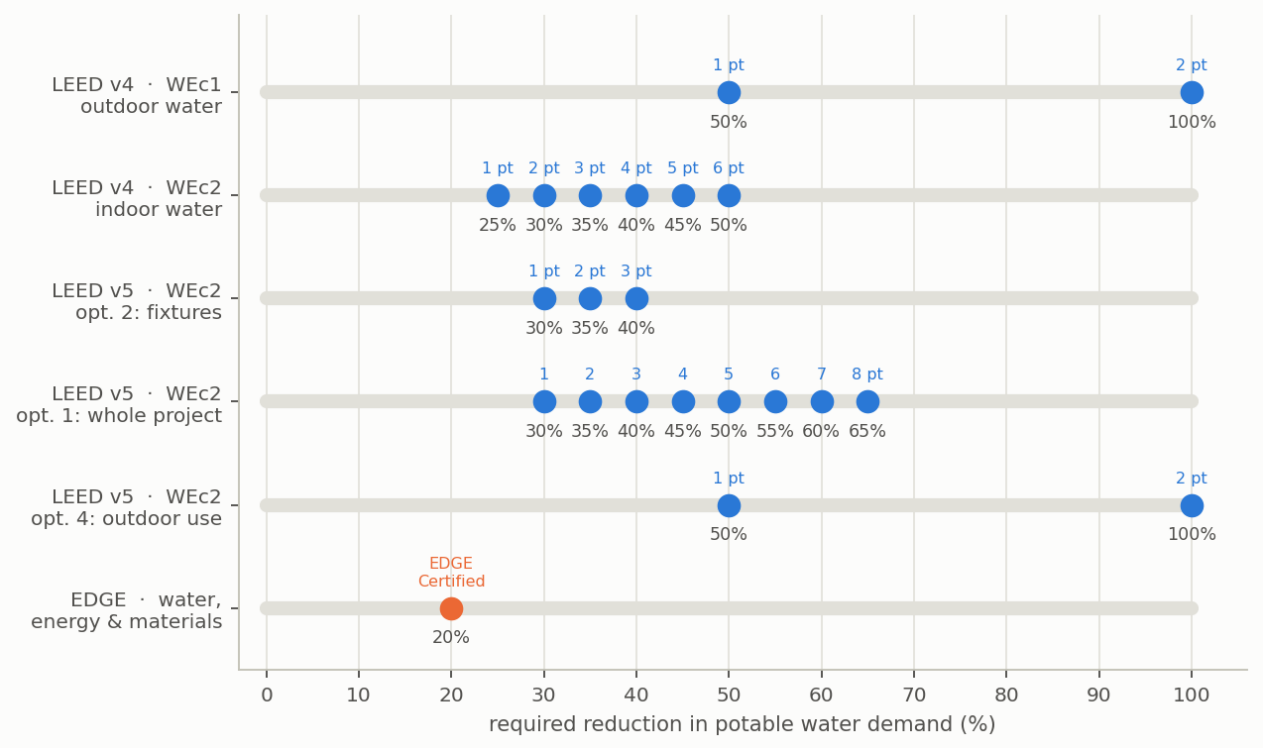


Figure 31 — The thresholds of reduction in potable water consumption with which the program places the project in LEED v4 (credits WEc1 and WEc2), LEED v5 (credit WEc2, options 1, 2 and 4) and EDGE, on the same scale. Rating systems whose criterion scores the existence of a system, not a percentage, are not on the ruler. The same project crosses different rating systems at different points, which is why declaring the saving obtained is worth more than declaring the certification intended.

2.9.1. LEED v4 and v4.1, Water Efficiency category

LEED is the rating system of the U.S. Green Building Council (<https://www.usgbc.org/leed>, accessed 15 October 2026), the most widespread internationally. Version 5 coexists with versions 4 and 4.1; the program places the project in both, and the study must declare which one it used. In versions 4 and 4.1, water efficiency has a category of its own worth eight points spread over two credits. The fundamental distinction it imposes is between indoor and outdoor water use, and the whole score follows from that separation.

Credit WEc1 deals with the reduction of outdoor use, that is, irrigation and the other demands of uncovered areas, and is worth up to two points. The program awards the two points with a 100% reduction in outdoor potable water use and one point from 50%, taking the rainwater allocated to irrigation from the daily balance itself; and a project with no outdoor demand registered does not score, in which case the program records the reason explicitly, so that the user does not read the zero as a performance failure.

Credit WEc2 deals with the reduction of indoor use and is worth up to six points, spread on a scale of five percentage points at a time from a 25% saving. It is preceded by a prerequisite, WEp2, which requires a 20% indoor reduction and is mandatory: without it the development is not eligible for certification, and it awards no points itself.

> The separation between indoor and outdoor use depends entirely on the **breakdown of the demand** described in section 4.2. The program does not invent that separation: it uses the rainwater the daily balance allocated to irrigation, which is supplied after indoor use. Without a broken-down outdoor demand, credit WEc1 appears as not assessed, and the indoor saving is taken, conservatively, as equal to the total saving.

> The score label gives only the points of the water category. The LEED level — Certified, Silver, Gold or Platinum — results from the sum of all the categories, and water alone does not define it.

2.9.2. LEED v5, credit WEc2 Enhanced Water Efficiency

In version 5, the indoor and outdoor use credits were gathered in credit WEc2, *Enhanced Water Efficiency*, worth up to eight points in new construction and up to seven in *Core and Shell*; the program assesses only new construction. Code WEc1 now designates another credit, *Water Metering and Leak Detection*, of submetering and leak detection, and should not be confused with the outdoor-use WEc1 of LEED v4. Prerequisite WEp2 requires, among other conditions, a 20% reduction in the consumption of fixtures and fittings relative to the rating system's baseline, and prerequisite WEp1 requires the alternative water source, such as the rainwater cistern, to have a meter of its own, separate from the mains one. The project scores by one of two paths: Option 1, which measures the reduction in water use of the whole project, or the sum of Options 2 to 6, which treat each part separately.

Table 75 — Options of LEED v5 credit WEc2 to which rainwater harvesting contributes

Option	What it measures	Score
1. Whole project	reduction in the project's water use against the baseline	30% 1 point, and 1 point every 5%, up to 65% 8 points; with an alternative water source, each step is worth 1 point more, up to 8
2. Fixtures and fittings	reduction calculated against the WEp2 baseline, which may include an alternative source	30% 1 point, 35% 2 points, 40% 3 points
4. Outdoor use, path 2	reduction of the theoretical irrigation requirement	50% 1 point, 100% 2 points
6. Reuse, path 2	on-site reuse system serving irrigation, flushing, make-up or process	2 points

The program calculates both paths and adopts the one with the higher score: Option 1 with the total saving, and the sum of Options 2, 4 and 6 with the indoor saving, the outdoor saving and the existence of the system, which the program treats as the reuse system of Option 6. The cap of eight points applies to both. Options 3 and 5, for appliances and process water, and path 1 of Option 4, landscaping without irrigation, do not depend on rainwater harvesting and are left out of the calculation. As in LEED v4, the rating system's reductions are measured against a baseline of fixture flow rates and irrigation, not against the modelled demand, so the qualification is indicative.

Rainwater harvesting can also contribute to credit SSc3, *Rainwater Management*. Under Option 1, it awards 1, 2 or 3 points for retaining on site the volume corresponding to the 80th, 85th or 90th percentile of local rainfall (70th, 75th or 80th on a zero-lot-line site), and 1 additional point when part of that volume is reused, without exceeding the cap of 3 points; under Option 2, it awards 3 points to whoever retains the increase in runoff relative to the natural land cover. The program does not assess this credit, because it depends on the runoff of the whole site, not only of the roof; the criteria matrix records it as not assessed.

2.9.3. National rating systems

The International Edition does not assess national rating systems. A project bound to one takes the simulated potable water saving from the report and applies the rules of that system, in their current version, outside the program.

> **Declare it in the study.** The qualification is only defensible with the current version of the rating system in hand, and the program does not replace that check.

2.9.4. EDGE, the only one that does not score

EDGE, developed by the World Bank's International Finance Corporation, follows a logic different from all the previous ones. Instead of awarding points to increasing performance, it measures the percentage saving against a local baseline in three independent dimensions — energy, water and the energy embodied in materials — and requires **each** of them to cross the established threshold. There is no compensation between dimensions: an exceptional water performance does not make up for a deficiency in energy.

EDGE has two further levels above the first. **EDGE Advanced** requires, in addition to the 20% in the three dimensions, an on-site energy saving of at least 40%; **Zero Carbon** requires the previous one plus 100% renewable energy or full offsetting of the remaining emissions.

It is worth noticing which bar the advanced level raises. EDGE Advanced raises the energy requirement, not the water one. The practical consequence for those designing rainwater systems is that the system secures the water bar with relative ease, whereas the certification level achieved is decided entirely outside the scope

of the water design. The program assesses only the water bar, by measure WEM14, whose input in the IFC application is the catchment area in square metres.

> **The honest limit is in the denominator.** The EDGE baseline is local, varies with the country and the building type, and is set by the IFC application itself. The program accepts the baseline declared by the user; in its absence, it adopts the modelled demand of the project and warns that the resulting percentage is a **floor**, not the value certification will recognise.
>
> The energy and embodied energy bars are beyond the program's reach, and it declares that limitation in the report. Claiming that a project is EDGE Certified with a third of the necessary evidence would be irresponsible.

The thresholds above are those the program applies, taken from the EDGE documentation published by the IFC (<https://edgebuildings.com/certify/certification/>); check them against the current text before citing them.

2.9.5. GRI 303

The Global Reporting Initiative is not a building certification system but a standard for corporate disclosure of social and environmental performance. Its 303 series deals with water and effluents, and two of its indicators are fed directly by the program's results: GRI 303-3, which reports the abstraction avoided in cubic metres per year and accumulated over the period, and GRI 303-5, which expresses the water circularity rate of the development.

2.9.6. What to declare

Any study reporting qualification in certification systems needs to make four points explicit, and omitting any of them compromises the verifiability of the result. The first is that the water quality classes 2 to 4 adopted by the program are internal adaptations, not classes of a standard. The second concerns EDGE, and consists in declaring that only the water bar was assessed, identifying the baseline used. The third applies to LEED, and consists in declaring the version of the rating system adopted and stating whether the split between indoor and outdoor use was broken down from project data or whether, in its absence, the indoor saving was taken as equal to the total saving. The fourth, finally, is the general caveat: the qualification the program produces is indicative, and certification is decided by the certification body in the light of the complete documentation of the development.

2.10. Multi-criteria decision

> This section formalises the two ranking methods the program offers, the choice band it reports instead of a single winner and the objective weights of the CRITIC method, and declares three departures from the canonical formulation that a published study needs to cite.

Multi-criteria analysis is the branch of operations research that deals with choosing between alternatives when the evaluation criteria disagree with one another and cannot be reduced to a single number without someone declaring what is worth more. That is exactly the situation of a rainwater harvesting project: the volume that delivers most water is not the one that yields most money, and neither is usually the one with the lowest carbon impact.

What the methods of this section do is not discover the right answer. They make explicit the weighting that would otherwise remain implicit in the choice of whoever decides. That is the whole difference between a study that declares its values and one that hides them behind an apparently objective result.

2.10.1. The eight criteria

The program evaluates each volume of the sweep by eight criteria, grouped into four dimensions: technical, economic, environmental and structural. Each criterion has a direction of preference: in some, more is better; in others, less.

Version 0.2.0 replaced the seven criteria in three dimensions of version 0.1.0. Three of the old criteria — the saving potential, the potable water consumption and, through the bill, the net present value — measured the same water saved, so the same effect was counted three times. The new set gives each dimension criteria that pull in different directions, and adds the weight of the system.

Table 76 — The eight decision criteria, their dimension, the direction of preference and the definition the program uses

#	Criterion	Dimension	Direction	Definition in the program
1	volumetric reliability	technical	maximise	rainwater consumed ÷ rainwater demand (non-potable use plus irrigation), in %
2	storage efficiency	technical	maximise	rainwater delivered per day ÷ volume of the lower cistern, in %: the daily turnover of the volume, the annual turnover ÷ 365. It falls with the volume and curbs oversizing. It is not the mean occupancy, which rises with the volume in a wet climate because a large cistern stays full of standing water
3	net financial savings	economic	maximise	the net present value of the system against the baseline without a cistern: avoided water bill minus investment and running costs, discounted
4	levelised cost of water (LCOW)	economic	minimise	Equation 52, in the project currency per m^3. U-shaped in the volume. The alternative with no cistern receives the worst LCOW observed plus 10%
5	discounted payback	economic	minimise	as in version 0.1.0; an alternative that does not pay back receives the worst payback observed plus 10%, at least one year more and at least 20 years
6	net life-cycle CO_2e	environmental	minimise	the net CO_2e at the end of the service life (negative = avoided), as in version 0.1.0
7	dry mass of materials	structural	minimise	dry mass of the system from the program's weight calculator (`triton.core.system.system_weight`): cisterns, pipes, pump and fittings
8	annual overflow	structural	minimise	volume overflowed per year, in m^3/year

The levelised cost divides everything the system costs over its life by all the rainwater it delivers, both discounted at the same rate and over the same horizon as the project:

$$\mathrm{LCOW} = (\mathrm{CAPEX} + \sum[\mathrm{OPEX}_{\mathrm{m}} \div (1+\mathrm{MARR})^{m}]) \div \sum[V_{\mathrm{m}} \div (1+\mathrm{MARR})^{m}] \tag{52}$$

Table 77 — Variables of Equation 52

Symbol	Meaning	Unit
`LCOW`	levelised cost of the rainwater delivered	currency/m³
`CAPEX`	initial investment (section 2.7)	currency
`OPEX_m`	running cost of month `m`: pumping energy, operation and maintenance, chlorine and the treatment line	currency
`V_m`	rainwater delivered in month `m`	m³
`MARR`	minimum attractive rate of return of the project, per month	dimensionless
`m`	month of the analysis horizon	—

A small cistern spreads the fixed costs over little water; a large one pays for volume that stands idle. Between the two the LCOW reaches a minimum, which is why it does not simply follow the investment.

The alternatives submitted to the ranking are the volumes simulated in the sweep, and each of them appears with the eight values above, calculated in sections 2.1, 2.3, 2.7 and 2.8 and by the weight calculator. No criterion is invented at this stage: the method only ranks what the previous analyses have already produced.

> **The weight of the system.** `triton analyze … --analysis all` (and `--analysis system_weight`) also reports the dry mass, the water load and the operating load, in kg and kN, split into three positions: basement or lower level, roof or upper level, and risers and network. The HTML report, the spreadsheet (sheet `system_weight`, with the summary of the chosen volume; the values per volume are in the sheet `alternatives`) and the terminal text show the block. Its warnings use attention thresholds of the **program**, not of any standard: 500 kg on the roof with the upper tank full, an upper tank above 1,500 L, a cistern above 3,000 kg dry, and any concrete cistern. Each asks you to confirm the load with the structural or foundation design.

2.10.2. TOPSIS

TOPSIS — *Technique for Order of Preference by Similarity to Ideal Solution*, proposed by Hwang and Yoon in 1981 — starts from a simple geometric idea. If each alternative is a point in an eight-dimensional space, one axis per criterion, then there are two reference points: the **ideal solution**, made up of the best value of each criterion, and the **anti-ideal solution**, made up of the worst. No real alternative occupies either of them, because none wins at everything or loses at everything, and the best alternative is the one that is at the same time closest to the ideal and furthest from the worst case.

The method carries out five steps. It builds the decision matrix, with the alternatives in the rows and the criteria in the columns; normalises that matrix, so that criteria measured in currency units, in percentage points and in kilograms come to occupy comparable scales; applies the declared weights; identifies the ideal and anti-ideal solutions; and ranks the alternatives by relative closeness to the ideal.

$$C_{\mathrm{i}} = d_{\mathrm{i}}^{-} \div (d_{\mathrm{i}}^{+} + d_{\mathrm{i}}^{-}) \tag{53}$$

Table 78 — Variables of Equation 53

Symbol	Meaning	Unit
`C_i`	closeness coefficient of alternative `i`, between 0 and 1	dimensionless
`d_i⁺`	Euclidean distance from alternative `i` to the ideal solution	dimensionless
`d_i⁻`	Euclidean distance from alternative `i` to the anti-ideal solution	dimensionless

The coefficient of Equation 53 would be 1 for an alternative that coincided with the ideal solution on all criteria, and 0 for one that coincided with the anti-ideal. As no real alternative occupies these extremes, what matters is not the absolute value of the coefficient but the ranking it produces.

Applied to a full sweep of the tutorial project (New York) in steps of 1 m^3 with the four dimensions weighted equally, the score peaks at a small volume and falls steadily at the larger ones, where the investment, the embodied carbon, the idle volume and the mass come to weigh more than the gain in water (Figure 32). In this project the peak of the full sweep is the volume section 4.9 obtained with seven candidates, but that is not guaranteed: the ideal and the anti-ideal are built from the set evaluated, so adding or removing alternatives shifts the reference points and can change the ranking, a phenomenon known as rank reversal.

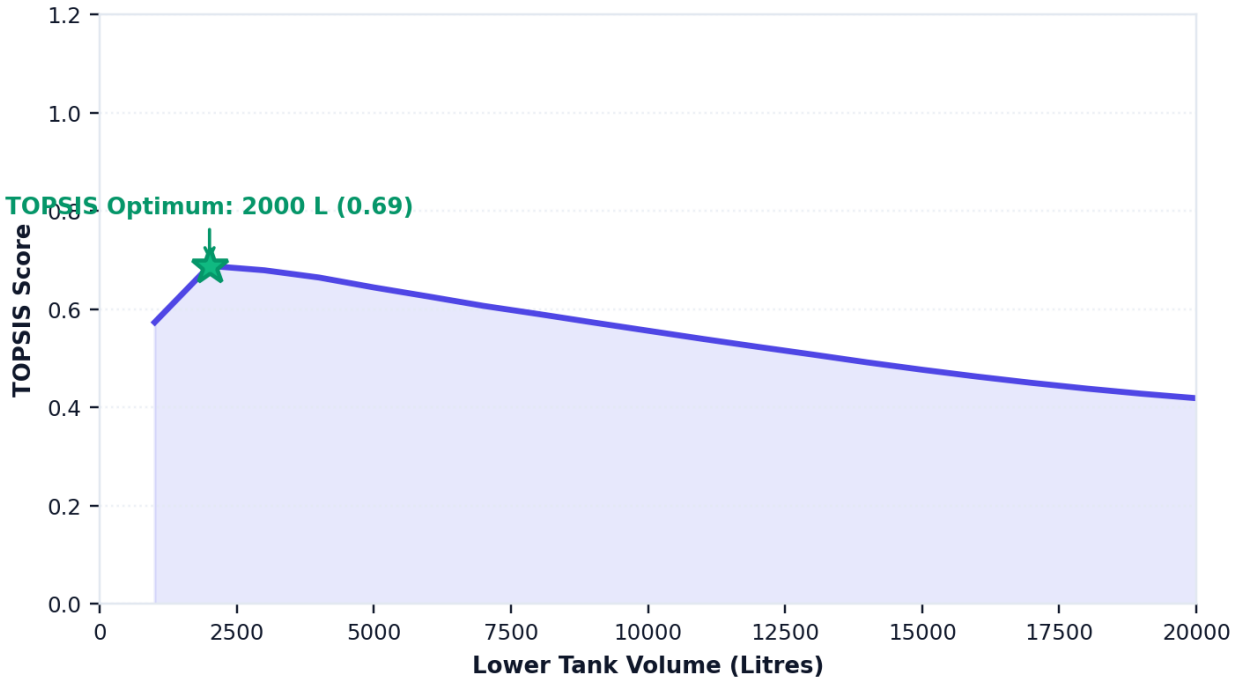


Figure 32 — TOPSIS score of each volume of the sweep of the tutorial project, with a polyethylene cistern, the four dimensions weighted equally and equal criterion shares; the star marks the volume with the highest score. Figure generated by the program itself.

2.10.3. A band, not a single volume

Near the top of the curve, neighbouring volumes score almost alike. Naming the highest score «the best volume» then claims a precision the method does not have: the difference between first and second place is often smaller than the uncertainty of the costs and of the rain behind it. The program therefore reports a **choice band**: the volumes whose result is similar to the best.

The rule is the same for every method. The scores of the volumes larger than zero — the alternative with no cistern stays out — are rescaled from 0, the worst, to 1, the best, and every volume at or above 1 − *t* enters the band, where *t* is the **tolerance**, 5% of the score range by default. The score is the closeness coefficient in TOPSIS, the index Q in VIKOR (lower is better, so the scale is inverted), the net flow in PROMETHEE II and the

first-rank acceptability in SMAA. The program also reports whether the band is contiguous — whether some volume evaluated between its ends was left out — and which volume has the highest score. That volume is information, not a verdict.

The band has three limits to state. It depends on the **grid**: a finer sweep puts more volumes in it, and a very poor alternative added to the set stretches the score range and can widen the band. It depends on the **tolerance**, which is a convention of the program and not a statistical test. And it applies to the weighted compromise only: the optimum of one dimension taken alone — the technical optimum by the marginal-gain threshold, the shortest payback, the lowest carbon — is still a single volume.

> **Declare the band and the tolerance.** «Volumes from 2,000 to 3,000 L have similar TOPSIS scores (within 5% of the score range)» can be checked; «the optimal volume is 2,000 L» overstates the method. Report the band, the tolerance and the weights together.

The tolerance is set in the command line, in the project file and in the declarative study (section 3.6); the interface uses the default.

2.10.4. Three departures to declare

The program's implementation departs from the canonical formulation in three points, all deliberate, and a published study needs to declare them so as not to attribute to the original methods a behaviour that belongs to the program.

The normalisation is a variant. Hwang and Yoon's canonical formulation uses vector normalisation, which assumes non-negative values on all criteria. The net present value, however, is often negative at small volumes, where the investment does not pay off. The program works around the restriction by translating each criterion by `x - min(x)` before normalising. The choice is necessary and deliberate, but presenting the result as canonical TOPSIS would be incorrect: declare the variant.

Opricovic's conditions are not implemented. The VIKOR method, in Opricovic's formulation, requires two checks on the compromise solution found — acceptable advantage and acceptable stability — and, when either fails, returns a **set** of equivalent solutions instead of a single winner. The program always returns the best alternative, without carrying out the test. In practice, this means that the VIKOR compromise solution should be read alongside the weight sensitivity analysis, and never alone.

The attribution of the code. The implementation of VIKOR and SMAA-VIKOR was written independently and checked against the `crispyn` library, by Aleksandra Bączkiewicz. TOPSIS was checked against Hwang and Yoon's original formulation in a case with all values positive, in which the translation described above is harmless and the two formulations must coincide.

2.10.5. SMAA-VIKOR

SMAA — *Stochastic Multicriteria Acceptability Analysis* — exists to answer the question TOPSIS does not: what if the weights were different? Instead of requiring a set of weights defined beforehand, the method draws thousands of weight combinations and returns, for each alternative, the probability of it occupying each position of the ranking.

The draws are not uniform over the eight criteria. A uniform draw would give each criterion 12.5% on average, and so 37.5% to the economic dimension, which has three criteria, and 12.5% to the environmental, which has one: the number of criteria would act as a hidden weight. The program draws the eight weights from a Dirichlet distribution whose parameters add up to 2 in each dimension — 1 and 1 for the two technical criteria, 2/3 for each of the three economic ones, 2 for the environmental one, 1 and 1 for the two

structural ones. Each dimension then weighs 25% on average, and each criterion, on average, what the default weights of TOPSIS give it.

The same draws can rank the volumes by TOPSIS instead of VIKOR (SMAA-TOPSIS), with the program's TOPSIS normalisation; it is available in automation (`run_smaa_analysis(…, engine="topsis")`) and in the interactive figure of the site. SMAA-VIKOR is the default everywhere else.

Reading the result is direct and informative. A volume that wins in 80% of the draws is a robust recommendation, which does not depend on a specific weighting to hold. A volume that wins in 30% is a fragile recommendation, and the text of the study needs to say so instead of presenting the winner as if it were consensual.

> It is the right tool when there is no consensus on the weights — which is the normal case in real projects, where the client, the designer and the regulator usually value different dimensions.

The most useful reading of the stochastic analysis is not the winner but the margin by which it wins. A volume that comes first in three quarters of the weight draws is a stable choice, which survives a change in the decision-maker's priorities; two technically tied volumes indicate the opposite, and in that case declaring the weight adopted stops being a formality and becomes the only information supporting the recommendation (Figure 33).

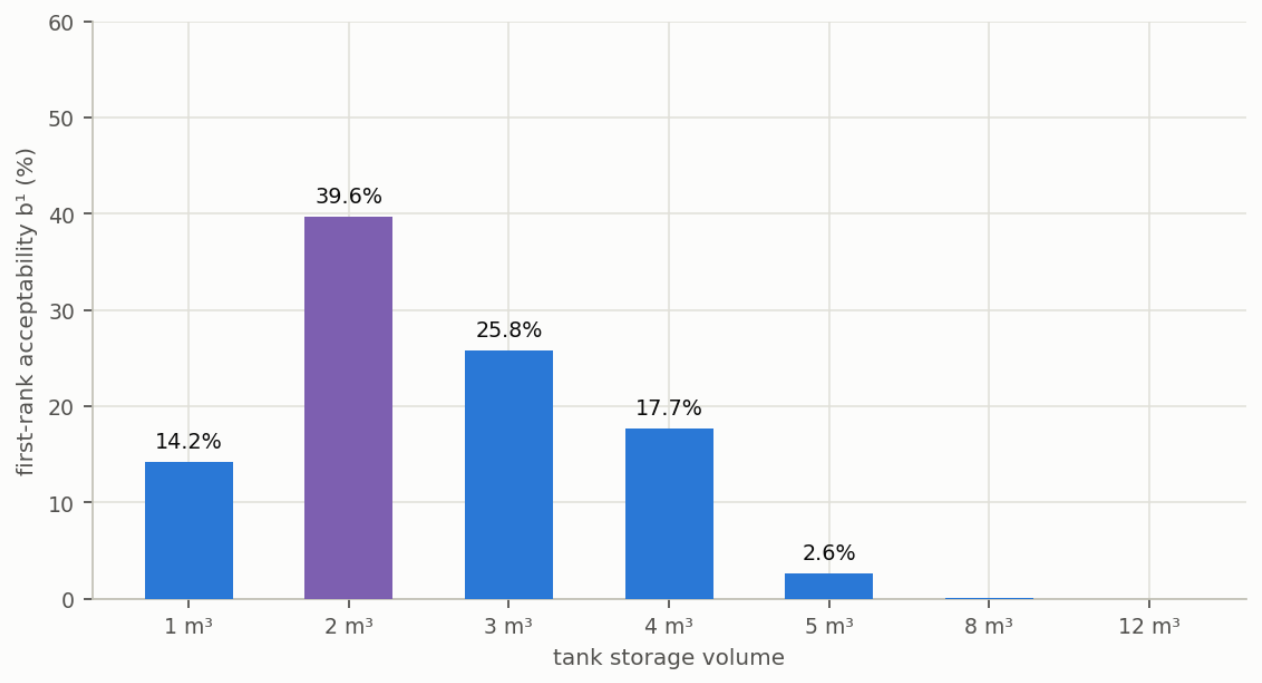


Figure 33 — First-rank acceptability (b^1) of each candidate volume, obtained with five thousand vectors of eight criterion weights drawn with 25% expected on each dimension. The highlighted volume is the one that most often comes first, and the others share the rest.

2.10.5.1. The tutorial, by both methods

The first table sets side by side the TOPSIS score, with the four dimensions weighted equally, and the SMAA-VIKOR first-rank acceptability, with five thousand vectors of eight criterion weights drawn, for the seven volumes of the tutorial in polyethylene with an upper tank. The second gives the choice band of each method. The investment and the carbon behind the scores are the illustrative figures of section 4.7 (illustrative, not a market price).

Table 79 — TOPSIS closeness score with the four dimensions weighted equally and first-rank acceptability in SMAA-VIKOR, with 5,000 vectors of eight criterion weights drawn with 25% expected on each dimension, for the tutorial volumes

Volume	TOPSIS score	TOPSIS rank	First place in SMAA-VIKOR, b[1]
1,000 L	0.657	5th	14.2%
2,000 L	0.783	1st	39.6%
3,000 L	0.764	2nd	25.8%
4,000 L	0.729	3rd	17.7%
5,000 L	0.677	4th	2.6%
8,000 L	0.493	6th	0.1%
12,000 L	0.317	7th	0.0%

Table 80 — Choice band of each method for the tutorial volumes: the volumes whose index lies within 5% of the range of the index, counted from the best; TOPSIS, VIKOR and PROMETHEE II with the four dimensions weighted equally

Method	Index	Choice band	Best index
TOPSIS	closeness score, higher is better	2,000–3,000 L	2,000 L
VIKOR, v = 0.5	Q, lower is better	2,000 L	2,000 L
PROMETHEE II, linear preference	net flow Φ, higher is better	2,000–3,000 L	2,000 L
SMAA-VIKOR, 5,000 weight draws	first-rank acceptability b[1]	2,000 L	2,000 L

The methods agree on where the answer lies and differ on how sharply they draw it. TOPSIS separates 2,000 L from 3,000 L by under two hundredths of score, a difference no input data supports, and its band holds both; PROMETHEE II gives the same band. SMAA measures the fragility from the other side: 2,000 L wins in 39.6% of the draws, 3,000 L in 25.8%, 4,000 L in 17.7% and 1,000 L in 14.2%. Its band holds 2,000 L alone, because acceptability spreads the volumes further apart than the scores do, but that does not make 2,000 L robust: by the yardstick of section 3.7, a winner below 40% is a choice that depends on the weights, and the study should say so and declare 3,000 L and 4,000 L as the alternatives. The largest volumes, 8,000 L and 12,000 L, win in almost no draw: no plausible weighting recommends them, and that is also a result.

2.10.6. The weights

The program takes four dimension weights — technical, economic, environmental and structural, 25% each by default — and shares each one among the criteria of its dimension by the **criterion shares**. The shares are equal by default; only the proportion within the dimension matters, and a share of zero removes the criterion from the calculation. With the default, each technical and each structural criterion weighs 12.5%, each economic criterion 8.33% and the single environmental criterion 25%.

$$w_{\mathrm{j}} = W_{\mathrm{d}} \times s_{\mathrm{j}} \div \sum s_{\mathrm{k}} \tag{54}$$

Table 81 — Variables of Equation 54

Symbol	Meaning	Unit
`w_j`	weight of criterion `j` in TOPSIS, VIKOR and PROMETHEE II	dimensionless
`W_d`	weight of the dimension `d` of criterion `j`, normalised so that the four add up to 1	dimensionless
`s_j`	share of criterion `j` within its dimension	dimensionless
`Σ s_k`	sum of the shares of the criteria `k` of the same dimension	dimensionless

Eight direct weights, one per criterion, are also accepted, and then the shares do not apply. VIKOR, PROMETHEE II and TOPSIS use the same rule. SMAA-VIKOR takes no weights: it draws them, with 25% expected on each dimension, and gives the central weight vector of each volume per criterion and summed into the four dimensions.

Weights from version 0.1.0. Three weights — technical, economic, environmental, as projects and studies up to version 0.1.0 declared them — are still accepted: the structural dimension receives their mean, so equal weights stay equal. Seven values, weights or shares of the old seven-criterion model, are refused with a message that says why (section 6.2): they cannot be mapped onto the eight new criteria. To reproduce a study made with version 0.1.0, use version 0.1.0.

Where the weights are declared.

Table 82 — Where the multi-criteria weights and the criterion shares are declared

Where	Dimension weights	Criterion shares
decision tab	one card per dimension, Technical, Economic, Environmental and Structural, with the dimension weight at the top, 25% each; the profiles «Balanced: 25% on each dimension», «Prioritise …» with 70% on one dimension and 10% on each of the others, and «Objective weights (CRITIC), computed from the results»	in each card, below the weight, the criterion shares of its criteria (Reliability and Efficiency; Savings, LCOW and Payback; CO_2; Mass and Overflow); below the cards, the «Equal shares» and «Recalculate» buttons
command line	`--weights t,e,a,s`, or eight values, or `critic`; three are still accepted	`--criterion-shares` with eight values, default `1,1,1,1,1,1,1,1`
project file	`analysis.topsis_weights`, four or eight values, or `"critic"`	`analysis.topsis_criterion_shares`, eight values
declarative study	`analise.pesos`, four or eight values, or `"critic"`; three are still accepted	`analise.partes_no_eixo`, eight values

The choice of weights, however, is not technical: it is a statement of value, and therefore needs to appear in the text of the study, with the four dimension weights and the criterion shares. The statement «optimal volume by TOPSIS», without the weights, is impossible to reproduce, and two studies with different weights reach different volumes without either of them being wrong.

Four courses are defensible, and the choice between them depends on how much is known about the priorities of whoever decides. Equal weights, explicitly declared as an absence of preference, are the neutral position. Justified weights, with the reason for each one, are preferable when the priorities are known. Objective weights, by the CRITIC method below, let the results set the weights when nobody wants to impose a preference. And SMAA, reporting the range of results instead of a single winner, is the most complete course when there is no consensus.

2.10.7. Objective weights: CRITIC

CRITIC — *CRiteria Importance Through Intercriteria Correlation*, proposed by Diakoulaki, Mavrotas and Papayannakis in 1995 — derives the weights from the decision matrix itself. A criterion weighs more when it separates the volumes strongly and when it says something the other criteria do not. Each criterion is first rescaled from 0, its worst value observed, to 1, its best, in its own direction of preference; then:

$$C_j = \sigma_j \sum_k (1 - r_{jk}) \tag{55}$$

$$w_{\mathrm{j}} = C_{\mathrm{j}} \div \sum C_{\mathrm{k}} \tag{56}$$

Table 83 — Variables of Equation 56

Symbol	Meaning	Unit
`C_j`	information carried by criterion `j`	dimensionless
`σ_j`	standard deviation of criterion `j` rescaled from 0 to 1, across the volumes: its contrast	dimensionless
`r_jk`	Pearson correlation between the rescaled criteria `j` and `k`; `1 − r_jk` is how much `j` differs from `k`	dimensionless
`w_j`	objective weight of criterion `j`, used in TOPSIS, VIKOR and PROMETHEE II	dimensionless

A criterion with the same value for every volume carries no information and weighs zero; if no criterion varies, the weights are equal. The weights come from the volumes larger than zero, because the alternative with no cistern enters with penalised LCOW and payback, which would inflate the contrast. They are recomputed from the results at every analysis, and the criterion shares do not apply. SMAA keeps drawing its own weights.

What CRITIC measures, and what it does not. It measures contrast and independence in the results at hand, not importance to anyone. It fits a study with no consensus on the weights that does not want to impose a preference, and it is a useful check on declared weights. It has three limits. The weights change with the set of volumes evaluated: another grid gives other weights. They express nobody's preference, so «objective» means «computed from the data», not «correct». And a criterion that varies a lot across the volumes gains weight even if it matters little to the decision.

In the tutorial (section 4.9), the payback weighs nothing, because no volume pays back and the penalty is the same for all. Reliability and overflow, which move together with the volume and against most of the other criteria, take about a fifth of the weight each, and the technical and structural dimensions come out heavier than the economic and environmental ones.

Where CRITIC is chosen. In the decision tab, the profile «Objective weights (CRITIC), computed from the results»: the weight box of each dimension card then shows, read-only, the computed weights summed over that dimension, and the criterion shares are hidden. On the command line, `--weights critic`; in the project file, `analysis.topsis_weights: "critic"`; in the declarative study, `analise.pesos: "critic"`. With `--weight-sensitivity`, the four dimension weights are drawn instead. A study that used CRITIC must say so and report the weights it computed (section 4.10).

2.10.8. The best by each criterion alone

Besides the weighted ranking, the program identifies the winner of the technical, financial and environmental dimensions taken alone — the most reliable volume, the one with the shortest payback (ties broken by the net saving) and the one with the lowest life-cycle carbon — and reports the three separately. Each is a single volume: the choice band applies to the weighted ranking only. They are numbers worth publishing together, because each one answers a legitimate and different question.

When the three coincide, the recommendation is strong and the decision needs no weighting. When they diverge, which is the common case and that of the tutorial, the divergence **is** the result: hiding it behind a single weighted number impoverishes the study and hands the reader a conclusion they have no way of evaluating.

2.10.9. What the method does not do

It is worth ending with the limits, because multi-criteria methods are often presented with an authority they do not have.

They do not choose the weights. The weighting belongs to the analyst, and it is a decision of value, not of technique. No statistical procedure replaces it.

They do not validate the criteria. If the net present value is wrong because the tariff structure was entered incorrectly, TOPSIS will rank the error with impeccable precision. The method ranks what it receives.

They do not incorporate constraints. Space available on the site, maximum budget, a regulatory requirement: all of these are filters prior to the ranking, applied by the designer when deciding which volumes even enter the comparison.

3. Guides available in the program

3.1. Comparing cities

> **Question this guide answers:** would the same project yield the same in another city?

It would not, and the difference is larger than the rain alone suggests. The common expectation is that more rain means more yield. That holds as a ranking, but it fails as a proportion, and it fails for a reason that deserves a whole section.

> **Your own cities.** The program ships three sample series: New York, London and Cape Town. For any other city, use a rainfall file of your own, one per city; everything else in the guide applies as written.

3.1.1. How to make the comparison

The procedure is simple: keep all the parameters of the project and change only the precipitation series. In step **1. Project & Rainfall**, load another series and run the simulation again. To compare several cities without redoing the project for each one, save one file per city, as section 3.6 recommends.

3.1.2. The result

The tutorial project — 150 m² of catchment, 600 L/day of demand, a 28% suppliable fraction and a 4,000 L cistern — taken to the three sample cities produces the table below.

Table 84 — The same tutorial project simulated in New York, London and Cape Town

City	Annual rain	Days with rain	Ratio between the wettest and the driest month	Potential with 4,000 L	Ideal volume
New York	1,125 mm	44%	1.4×	26.83%	4,000 L
London	649 mm	50%	1.5×	20.08%	4,000 L
Cape Town	495 mm	28%	8.3×	14.52%	4,000 L

Figure 34 separates the two quantities, each one on its own scale.

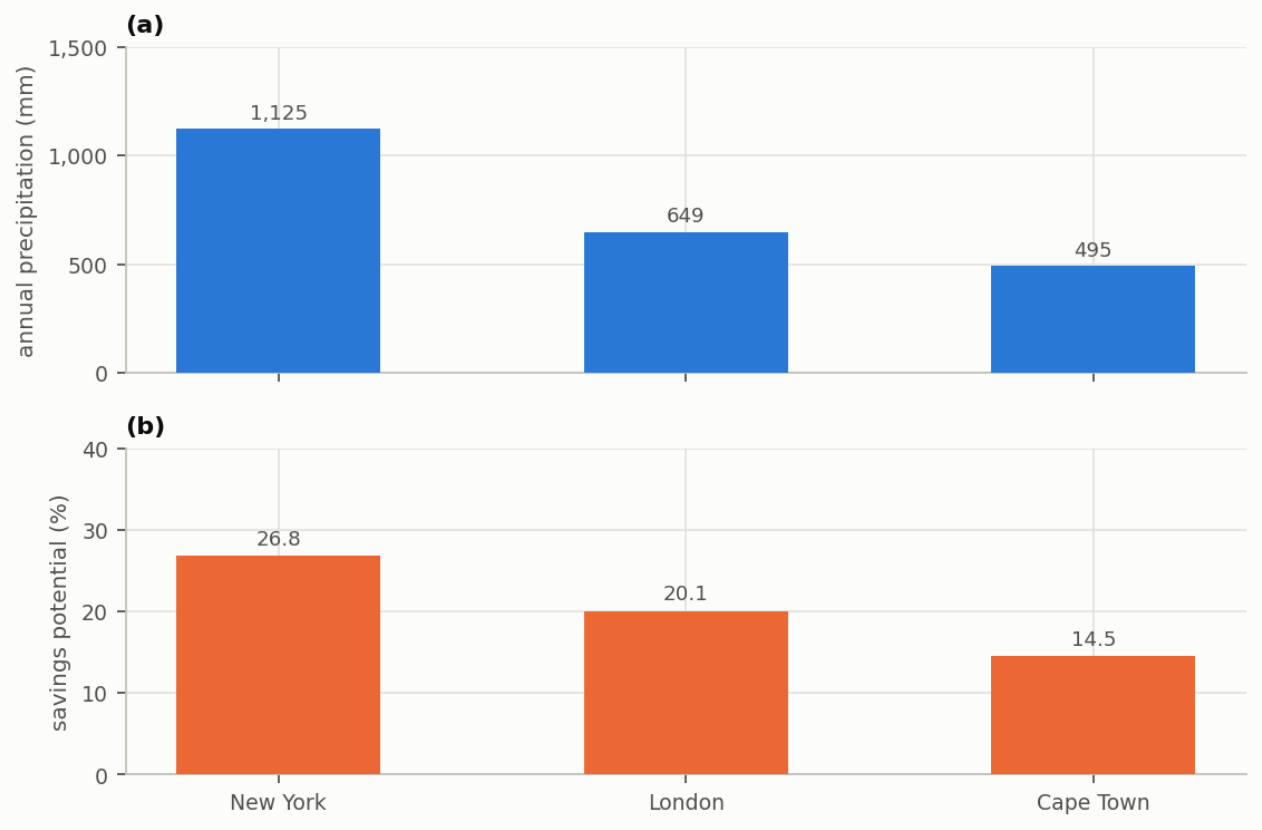


Figure 34 — (a) Mean annual precipitation and (b) potable water saving potential of the tutorial project, with 150 m^2 of catchment, 600 L/day of demand, a 28% suppliable fraction and a 4,000 L cistern, in New York, London and Cape Town. The potential falls faster than the rain does from London to Cape Town.

3.1.3. The regime matters more than the depth

Read side by side, the annual rain and saving potential columns do not move in proportion. New York receives 73% more rain than London (1,125 mm against 649 mm) and yields 6.75 percentage points more: 26.83% against 20.08%. London receives 31% more rain than Cape Town (649 mm against 495 mm) and yields 5.6 points more, 20.08% against 14.52%. Set against the 28% ceiling, New York reaches 96% of it, London 72% and Cape Town 52%.

The explanation lies in how the rain is spread, and the table above shows it twice. The share of days with rain is 44% in New York, 50% in London and only 28% in Cape Town. And the ratio between the wettest and the driest month, which measures how much the rain concentrates over the year, is 1.4 in New York, 1.5 in London and 8.3 in Cape Town.

Table 85 — Ratio between the wettest and the driest month in the three cities

City	Ratio	What it means
New York	1.4×	it rains all year round, with only a mild seasonal swing
London	1.5×	likewise: modest depth, but well distributed
Cape Town	8.3×	**a marked wet season, and a long dry one**

London rains less than New York but rains often and evenly, so the cistern is refilled all year round and full supply reaches 69.1% of the days. In Cape Town the rain comes in a few winter weeks, and the cistern, which refills in winter, runs short in the dry summer: full supply falls to 49.9% of the days, against 95.3% in New York with the same tank. Were the dry season three months long, a tank sized to get through it would have to store ninety days of rainwater demand, which in this project is 15,120 litres — a volume no residential

cistern can hold. The system then stays idle for part of every year, and the annual potential reflects that idleness.

> **The practical conclusion.** Rainwater harvesting yields more where rain is frequent than where it is abundant. London shows it against New York's depth, and Cape Town shows it against London's: a climate with a marked dry season is the worst case, however intense the rain of the wet season.

Figure 35 presents the monthly regime of the three cities on the same scale.

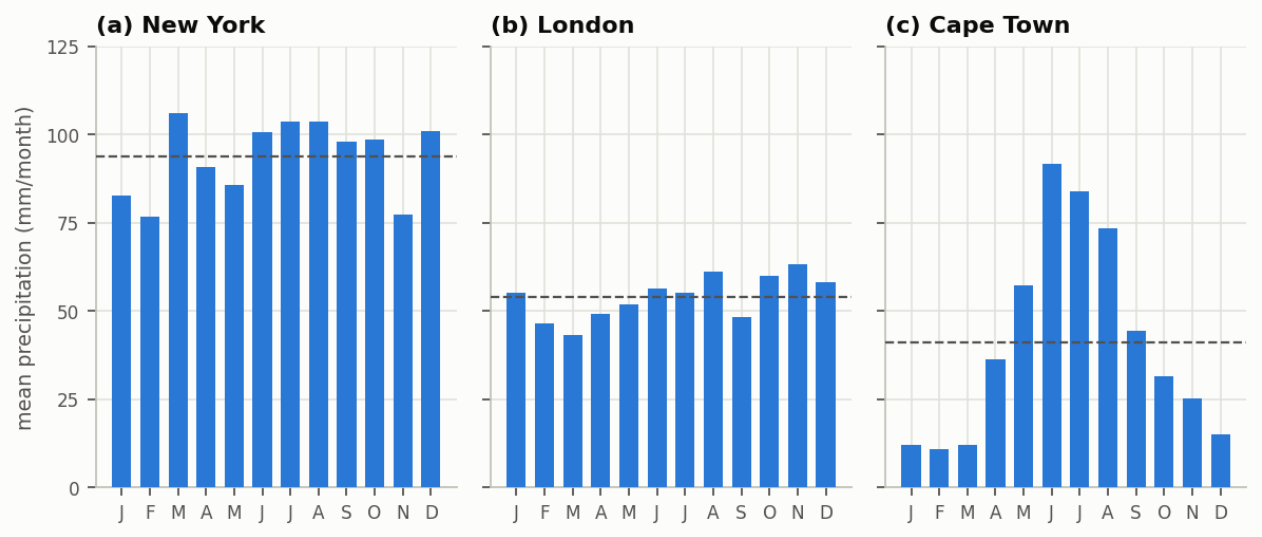


Figure 35 — Mean monthly precipitation in (a) New York, (b) London and (c) Cape Town, on the same scale; the dashed line is the monthly mean of each series. New York and London spread the rain over the whole year; Cape Town concentrates it in winter and has a dry summer. It is this distribution, not the annual total, that decides the performance of the tank.

3.1.4. Do not carry a result from another city

The comparison above is not a peculiarity of this tutorial, and the lesson for anyone comparing cities is the same in every study: the local series decides, and a volume or a potential brought from another city, even a neighbouring one, does not replace the simulation. A published figure for a climate that is not yours is a hypothesis to test, not a result to adopt.

3.1.4.1. Many cities at once

To compare more than three or four cities, changing the series by hand stops being practical. The scenario spreadsheet of section 3.6 runs the same project against several series in a single run, saving one result per row. Keep the same building and tank parameters on all rows of the spreadsheet, and vary only the series: that is what isolates the effect of the climate.

3.1.5. What else changes between cities

Precipitation is not the only quantity that varies between cities, and the other two can reverse the economic conclusion of a comparative study.

The first is the **tariff**. The price of a cubic metre varies considerably from one utility to another, and so does its structure: a flat rate with a sewer surcharge, as in New York, or stepped blocks, as in Cape Town, where the last cubic metre is the dearest. A 15% potential under a steep tariff can yield more money than a 27% potential under a low one, and section 3.3 deals with that mechanism in detail. The sample cities carry their own published tariffs, but only the New York tutorial carries costs, so this guide compares them on saving

potential, not on payback.

The second is the **electricity grid emission factor**, which changes at the same time the emission avoided per cubic metre of water replaced and the environmental cost of pumping. In the International Edition it is entered for each project.

> **When comparing cities in a study, make clear what varied.** Comparing only the precipitation, keeping tariff and emission factor fixed, isolates the climate effect and is a legitimate comparison, as long as it is declared as such. Varying all the quantities at once produces a number that cannot be explained, because it adds effects of possibly opposite signs.

3.1.6. The ideal volume does not change here

The last column of the table holds a surprise: with the 1 %/m^3 threshold, the ideal volume is 4,000 L in all three cities, despite regimes that differ as much as these.

The explanation lies in the nature of the criterion. The ideal volume by marginal gain locates the knee of the yield curve, and the position of that knee depends on how the first cubic metres of storage fill and empty against a daily demand of 168 L, which is the same in all three cities. What varies strongly is the **plateau** the curve reaches after the knee, 26.83%, 20.08% and 14.52%, not the point at which it bends. The coincidence belongs to this house, this threshold and these three cities; it is not a law, and another demand or another threshold can separate them.

Put another way: in Cape Town you get the same volume right as in New York and harvest barely more than half the water with it.

3.2. Using a future climate scenario

> **Question this guide answers:** will the system I size today still serve in 2060?

> **Your own projections.** The International Edition carries no climate projection database. The method of this guide applies as it stands to projected series that you load as rainfall files: for example, bias-corrected daily series from a national climate service or from a regional downscaling study. The guide says what to ask of such series and how to compare them.

A rainwater tank lasts thirty years or more, and the rain that will fall on the building over that period will not be the same as the rain that fell in the recent past. Sizing a long-lived system only on the historical series implicitly assumes a stationary climate — an assumption the available projections do not support. Triton cannot supply the projections for your site, but it can run the same project on any series you give it, so that the sizing can take this question into account explicitly.

3.2.1. What the projected series must be

Check four things about any projected series before loading it.

It must be daily and in millimetres. The program reads one value per day, as for any rainfall file (appendix F). Monthly projections do not serve: the tank responds to the distribution of the days.

It should be bias-corrected. Global climate models have a resolution of tens to hundreds of kilometres and reproduce local rain poorly: they tend to get the frequency of rainy days, the intensity and the extremes wrong. A series that has not been adjusted to the observed distribution will misstate the yield, usually in a direction you cannot tell in advance. A correction improves the statistics; it does not turn a bad model into a good one, and it cannot correct an implausible trend.

It represents a grid cell, not a station. The series of a place is that of the cell that contains it, so it describes the mean rain over an area, not the rain at a gauge. In rugged terrain or on the coast, the difference between the cell and the plot can be large. The three sample series of the program (New York, London, Cape Town) are of this kind.

Its history is simulated. The historical part of a model series is not the observed rain, but the model's simulation for that period, corrected to have the same **statistics** as the observation. The chronology does not coincide: a rainy day in the model series does not correspond to a real rainy day. That is why the right comparison for a future scenario is with the **history of the same model**, not with the observed series. Mixing the two would attribute to the future climate the difference between observation and model.

3.2.2. Choosing scenario and window

The **scenario** represents the future path of greenhouse gas emissions. Scenarios are not forecasts, but coherent hypotheses about global socioeconomic behaviour over the century (Figure 36). A middle path stabilises and then reduces emissions; a fossil-fuel-intensive path assumes high and growing emissions without effective mitigation.

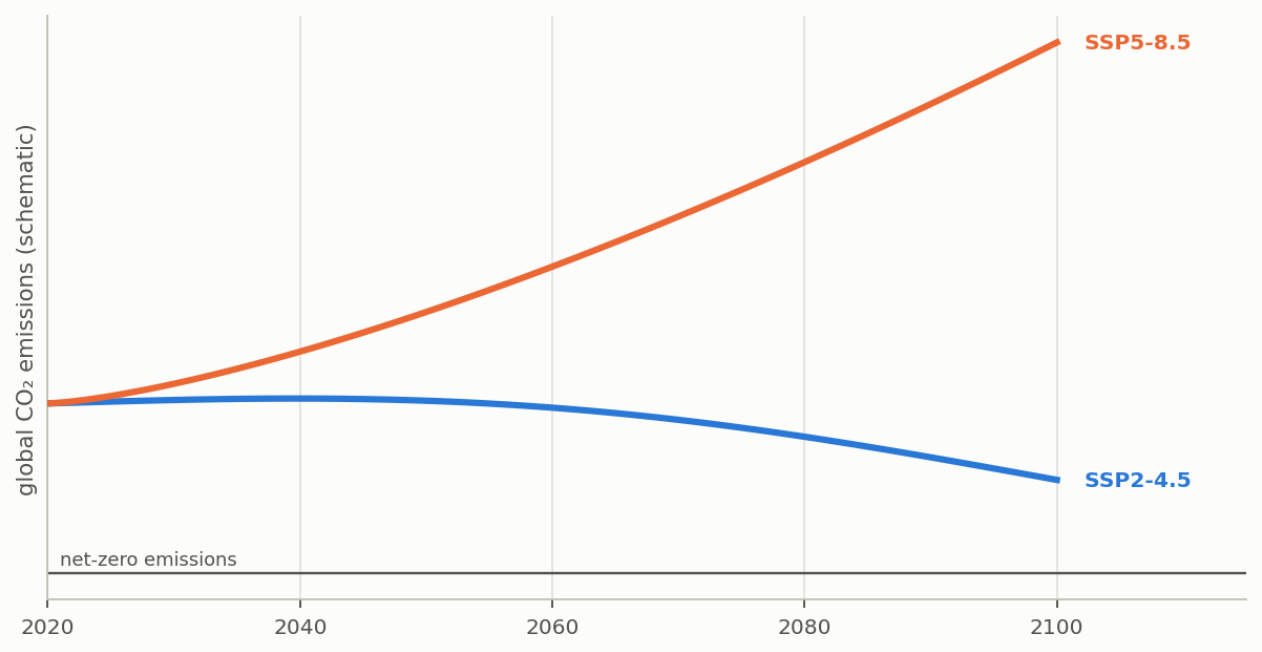


Figure 36 — The shape of two typical emission pathways. The intermediate pathway has emissions that stabilise and then fall; the fossil-fuel-intensive one assumes high and growing emissions, without effective mitigation. The figure shows the shape of each one, not projected values.

The **time window** is the slice of the future series on which the study is made. The program lets you trim any period, with the start and end dates of step **1. Project & Rainfall**. The most common convention is to take thirty-year windows, the same length as climatological normals. The step warns when the slice is shorter than ten years. The choice of window should relate to the intended service life of the system: assessing a twenty-year tank, installed now, against the end of the century assesses a period in which it will already have been replaced.

The choice of the **climate model** is the most delicate of the decisions, and a subsection of its own is devoted to it further on.

3.2.3. How to conduct the study

The right procedure is to run the same project in each combination of interest and compare the results with one another, instead of sizing directly on the projected series. Four steps summarise it.

1. Close the sizing with the **historical** series. It is the reference.
2. Run the same project on the **simulated history** of each model you will use. It is against it, not against the observed series, that the future is compared.
3. Keep all the other parameters and change only the series, for each scenario and window.
4. Compare the **saving potential** and the **days of full supply**, always as a difference between the future and the history of the same model. The second usually degrades more than the first, because what changes first is the distribution, not the total.

> **An example of reading.** Suppose that, with one model, the potential is 36% in the simulated history and 33% in a future window, and that the observed series gives 37%. The change attributable to the climate is three points, not four: the remaining point is the difference between model and observation, which also exists in the past. (The numbers are hypothetical, to show the arithmetic.)

> **What not to do.** Size directly on the future series and present the result as a design. The future series is a projection with large uncertainty; it serves to test the **robustness** of a sizing done on the historical series, not to replace it.

3.2.4. The choice of model, and why it matters so much

Different climate models project different futures for the same city under the same emission scenario, and that spread is not noise to be removed: it is the honest expression of the physical uncertainty of the problem. For rain, the spread between models is often larger than the difference between emission scenarios, which means that the choice of model can weigh more on the result than the choice of socioeconomic future. The consequence for the design is direct: running both scenarios with a single model informs less than running one scenario with several models.

Three courses of action are defensible in the face of this spread, presented here in decreasing order of rigour.

Ensemble. Run all the available models and report the range of results, with the median. It is the most rigorous and the most expensive in computing time. Section 3.6 shows how to do it in batch.

Justified subset. Choose a few models with documented good performance for your region, and declare the selection criterion and the source.

Single model, declared as such. Acceptable for an exploratory analysis, as long as the text does not present the result as a robust projection.

> **What never to do:** run several models, pick the one that gives the most convenient result, and report only that one.

3.2.5. What the three sample cities suggest about a future climate

Studies that simulate rainwater harvesting systems under climate projections tend to agree on one point: the change in the annual total of rain matters less than the change in its **distribution**. Section 3.1 shows the same thing across space: Cape Town has 76% of London's rain and a ratio of 8.3 between its wettest and driest months, and its potential is 14.52% against 20.08% with the same tank. A future climate with longer dry spells behaves, for the tank, like a change of city, and a tank that is adequate today may need to be larger to deliver the same reliability.

3.2.6. What to declare

A study with a climate scenario must state, in the method:

- the **model or models**, by name, and the selection criterion;
- the **scenario**;
- the **time window**, with the years;
- the **historical series** used as the reference;
- whether there was downscaling or bias correction, and which method, against which observed dataset;
- the **source of the series**, with the version;
- that the future was compared with the **simulated history of the same model**.

Without this, the result is not reproducible.

3.2.7. A caveat of method

Climate projections carry two stacked uncertainties of different kinds: that of the scenario, which is socioeconomic and concerns future human choices, and that of the model, which is physical and concerns the representation of the climate system. Neither is reduced by running more simulations with the same material, because it is not sampling uncertainty.

A study conducted honestly presents the result as a range, not as a single number, and avoids conclusions that depend on the third decimal place of a projection for 2060.

3.3. Adjusting the tariff of your city

> **Question this guide answers:** is the tariff in my project the one the building is billed on, and is it entered correctly?

> **International Edition.** The program carries no tariff catalogue. The tariff is typed in, in the economic step, with a block table, a set of codes and six minimum-charge regimes. This guide describes them, so it is also the reference for entering any tariff structure. The three example projects (New York, London and Cape Town) each carry the published tariff of their city, with source and date.

This is the guide that changes results the most. The tariff structure decides the economic feasibility of a rainwater system more than any design parameter, and it is also the input that most often appears wrong in published studies on the subject.

3.3.1. How a water and sewage bill is made up

Before entering a tariff, it is worth understanding what is being entered. A water bill is not the product of consumption by a single price, and five features set it apart from the electricity bill, which is the reference most familiar to most readers.

Provision is local, and so is the price. Each city is served by one provider, public or private, and each provider publishes its own table, approved by a regulator or by a public board. There is no universal water tariff. The three example cities show it: New York charges one price per volume, London charges a standing charge plus one price per volume, and Cape Town charges four increasing steps plus a standing charge.

The tariff may be progressive by consumption block. Where it is, a cubic metre does not cost the same at any quantity: consumption is divided into blocks, and each block has its own, increasing price. Progressivity makes saving water more valuable than it seems: the cubic metre no longer consumed is the one of the highest block on the bill, the most expensive one.

There may be a part that does not depend on consumption. Many utilities charge something even to those who consume nothing: a standing charge, a minimum bill or both. It is the subject of the subsection on the six regimes, below, and it is the point that most decides whether a rainwater system pays for itself.

Sewage is charged on the water. Providers bill sewage by applying a percentage to the water part, by a price per cubic metre, or by blocks of its own. In New York the sewer charge is a percentage of the water charge, so that each cubic metre saved is worth the water price and the sewer charge together. In London, wastewater has a price per cubic metre of its own. In Cape Town, sanitation is charged by four steps on 70% of the water consumed.

There are different categories of consumer. Utilities publish separate tables for residential, commercial and other categories, often at higher prices than the residential one. The program's tariff screen holds one structure per project: to study a school, a shop or an industry, enter the structure of the category the building is billed in. Section 3.5 shows the procedure.

3.3.2. Start by checking what is in the project

In the economic step, open the tariff screen. The program shows the structure in force in the project: the block table, the sewage mode, the standing charges, the effective date and the source recorded. In the example projects, the source and the date are filled in; in a new project, you enter them. Three items deserve checking against your utility's current tariff document, and the order matters because the first invalidates the others.

1. **the effective date**: tariffs are adjusted every year;
2. **the block values**;
3. **the minimum-charge regime**, which is item 3.3.4.

If any of the three differs, edit the table. The edit applies to your project and is saved inside the `.triton` file, which means whoever receives your project will reproduce the same calculation, with the same table.

3.3.3. How the table is built

Each row of the tariff structure is represented in the program by a quadruple of values: the minimum volume of the block, the maximum volume, a monetary value and a code. The code is the decisive element, because it is what says what that value means, and structures that look alike charge in very different ways depending on the code of each row.

Table 86 — The six tariff block codes and the effect of each one on the bill

Code	What it is	How it enters the bill
1 or 0	consumption block	the price is charged on the volume that falls **within** each consumption block
−1	availability charge	fixed value **added** to the consumption part
−2	retroactive allowance	up to the allowance volume, the fixed value is paid; beyond it, **everything from zero** is charged
−3	payment floor	the bill does **not** go below this value
2	exponential base price	PB of the formula $PB \times C^n$, valid up to the row's maximum
3	exponent of the exponential table	the n applied to the consumption **of the whole month** that falls in the row

The London example, taken as an illustration of the notation, has two rows: one availability charge (the water standing charge, spread by month) and one open consumption block.

```
(0.00 ; 0.00   ; standing charge per month ; -1)   availability charge, always added
(0.00 ; 999999 ; price per m³              ;  1)   one open consumption block
```

The Cape Town structure has the same availability row followed by four consumption blocks, one for each step of the published table. The New York structure has one open block and, for the minimum daily charge, a payment-floor row (code −3).

3.3.4. The six regimes, and why they decide projects

A minimum charge appears on the bill of many utilities, and it means **different** things in each one. The program distinguishes six regimes:

Table 87 — The six tariff regimes and what happens when saving in each one

Regime	What happens when saving	Where it appears in the examples
no minimum	each m³ saved is deducted	none of the three
availability charge	likewise; the fixed fee remains, but it does not prevent the saving	London (standing charge); Cape Town (standing charge, with steps)
exponential formula	likewise; the m³ saved is worth the base price raised to the exponent	none of the three
allowance in the minimum	below the allowance, saving **deducts nothing**	none of the three
retroactive allowance	beyond the allowance, everything from zero is charged	none of the three
payment floor	the bill does not go below the floor	New York (minimum daily charge; it does not bind at the tutorial consumption)

The case that brings down studies. Compare two hypothetical structures side by side, for the same consumption. The prices are round numbers in currency units (cu), chosen to make the arithmetic easy to follow; they are an illustration, not a tariff:

Table 88 — Effect of the water saving on the bill in two opposite tariff regimes (hypothetical structures, in currency units)

Consumption	Structure A, allowance in the minimum (50 cu for the first 10 m³, then 5 cu/m³)	Structure B, availability charge (40 cu plus 5 cu/m³)
14 m³	70 cu	110 cu
12 m³	60 cu	100 cu
10 m³	50 cu	90 cu
8 m³	**50 cu**	80 cu
5 m³	**50 cu**	65 cu

In structure A, the bill **stops falling at 10 m³**. A house that consumes 12 m^3 and installs a system that saves 4 goes down to 8, and saves 10 cu, not the 20 cu the average price of 5 cu/m^3 would suggest. If it saved 7, it would go down to 5 and save the **same** 10 cu: the three additional cubic metres are worth nothing.

In structure B, each cubic metre saved reduces the bill, down to the first one.

> Running a case of structure A with the data of structure B produces a payback that does not exist. Check the regime before trusting any economic result.

The three example cities are all in the second family: in each, every cubic metre saved reduces the bill. In New York, for the tutorial house, the bill without the system is for 18.26 m^3 a month, US$ 89.37; with the system, 13.31 m^3 and US$ 65.15; the saving is 4.95 m^3 and US$ 24.21 a month. The two prices (water and sewer) are both earned on every cubic metre saved, which is why the saving per cubic metre is more than twice the water price alone.

Figure 37 shows the three responses side by side. What distinguishes the regimes is not the price charged, but the shape of the curve: where the curve is horizontal, saving water does not reduce the bill at all.

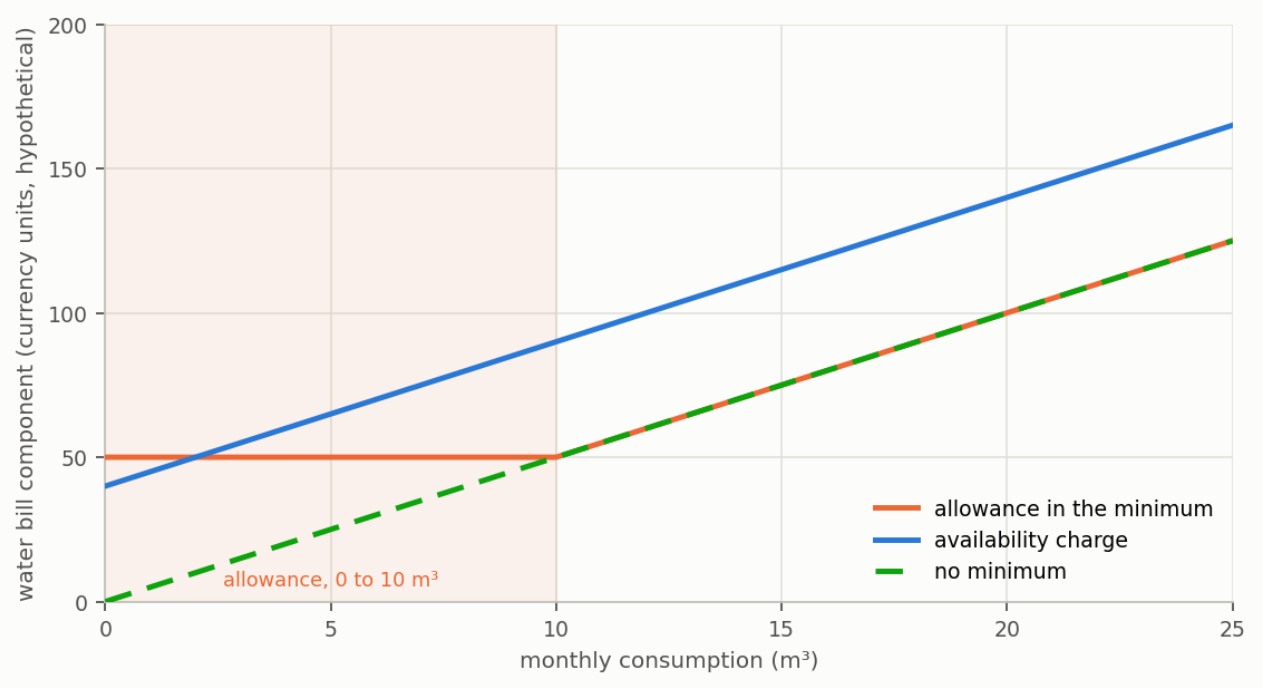


Figure 37 — Water part of the monthly bill as a function of consumption, in three minimum-charge regimes. Sewage is not in the chart because it is charged as a percentage of this part and only multiplies the curve, without changing its shape. With the availability charge and with no minimum, each cubic metre saved reduces the bill from the first one; with the allowance in the minimum, the horizontal stretch marks the consumption range in which saving water does not reduce the bill.

3.3.5. The exponential formula

Some utilities do not charge water by blocks. The water part of the bill is given by a formula:

```
Water = PB × Cⁿ + SB
```

where `PB` is the base price, in currency per m³; `C` is the month's consumption, in m³; `n` is the exponent that the utility's **exponent table** gives to that consumption; and `SB` is the basic service, charged even without consumption. Typically `n` is 1.00 up to a threshold and rises with consumption from there on.

Two differences from the blocks decide the calculation:

- **The exponent applies to the whole consumption.** With blocks, each cubic metre is charged at the price of the block it falls in; with the formula, the `n` of the row in which the total consumption falls applies to the whole volume. Going over a threshold therefore raises the cost of the cubic metres below it as well.
- **There is no price step, there is a curve.** The mean price of a cubic metre of water is `PB × C^(n−1)`: constant while `n` is 1 and growing after that.

For rainwater harvesting, the consequence is that **every saving is deducted from the first cubic metre**, and deducted more where the exponent is larger.

None of the three example cities uses this regime. In the program, the formula enters the same table of quadruples, with two codes of its own: a row of code 2 holds the base price `PB`, and one row of code 3 for each interval of the exponent table holds the `n`.

```
(0.00 ; 0.00   ; SB  ; -1)   basic service, always added
(0.00 ; 999999 ; PB  ;  2)   base price PB
(0.00 ; 20.00  ; 1.00 ; 3)   n for consumption in (0, 20]
...                          one row per interval of the exponent table
```

In the **Tariff Manager**, the structure appears with the label «Exponential formula», the «Exponent n» rows can be edited, the simulator shows the `PB × Cⁿ` calculation for the chosen consumption, and the upper chart

shows the mean price $PB \times C^{n-1}$ instead of the steps. The sewage field becomes «Sewage (per m^3 consumed)», and the economic step offers the same mode, «Per m^3 consumed», next to the fixed value and the percentage of water.

3.3.6. When the minimum is diluted into the tariff

A frequent error in tariff tables: the utility states «minimum bill of 50 for 10 m^3», and whoever registers it records it as 5 per m^3 up to 10 m^3.

The difference is enormous. In the first reading, someone who consumes 4 m^3 pays 50; in the second, 20. And, worse for a rainwater study, in the second reading saving below 10 m^3 **is deducted**, when in reality it is not.

If you register a new tariff, **check this**: a minimum stated as a bill is an availability charge or an allowance, not a price per cubic metre.

3.3.7. Sewage

The sewage percentage applies to the **water part** of the bill, not to the total bill.

In New York the sewer charge is 159% of the water charge, so the sewer part is larger than the water part, and the two together are the cost of each cubic metre. Where the percentage is 100%, the sewage part equals the water part and sewage is **half the bill**. Saving water saves both parts, and that is why the effective value of the cubic metre saved is higher than the water price.

Some utilities charge sewage by a price per cubic metre (London) or by blocks of its own on a fraction of the water volume (Cape Town, on 70% of the water consumed). The program has one mode for each: percentage of the water part, price per cubic metre, and blocks on a fraction of the volume. Choose the one that matches the document.

3.3.8. Effective date, escalation and alternative tables

A table applies from the date of the document it came from, and there is not always a newer one. The tariff dialogue shows that date next to the **Study base date**, which is stored in the project. Between the two, the program applies the escalations already due, at the configured escalation rate, and the following ones fall on the anniversaries of the table, not twelve months after the study starts. This is an estimate, because the escalation actually granted may have been different; with the current table at hand, type it in with its own date. An old project, without the dates, stays as it was.

Some cities have more than one residential table, for example by property size, by meter size or by area. Choose the table that matches the property, and record in the project why it represents it. Anyone with the property's own bill can, as always, type the table in.

3.3.9. Where to find the data

In order of reliability:

1. **Tariff document** of the regulator, the public board or the utility. It is the official document, and it has the effective date.
2. **Table published by the utility**, usually under «charges» or «tariffs» on its website.
3. **Bill simulator** of the utility, when there is one. Good for checking: simulate two consumptions and see whether your table reproduces both values.

4. **Real water and sewage bill**, of the property itself. It is the best evidence, and it allows the whole structure to be checked.

> **Always record the effective date and the source.** A study that does not say when the tariff dates from cannot be reproduced two years from now.

3.3.10. Check before you trust

After building the table, do the test that item 3.3.7 suggests: simulate two consumptions, one inside and one outside the minimum block, and compare with the real bill or with the utility's simulator.

If both match, the structure is right. If only one matches, the minimum-charge regime is wrong, and that is exactly the error that most compromises a rainwater study.

3.4. Modulating the demand by calendar

> **Question this guide answers:** and when consumption is not the same every day?

Schools close for holidays, beach hotels fill up in summer and offices empty at weekends. Treating any of these buildings as if it had a uniform consumption errs in both directions at once: it overestimates the demand in the empty periods and underestimates it at the peaks. The error does not cancel out over the year, because what matters to the rainwater system is not the total consumed but the match between consumption and the rain available on that day.

3.4.1. The four modes

The program offers four modes of demand modulation, which differ in the number of values the user enters and in the situation in which each one is justified (Figure 38).

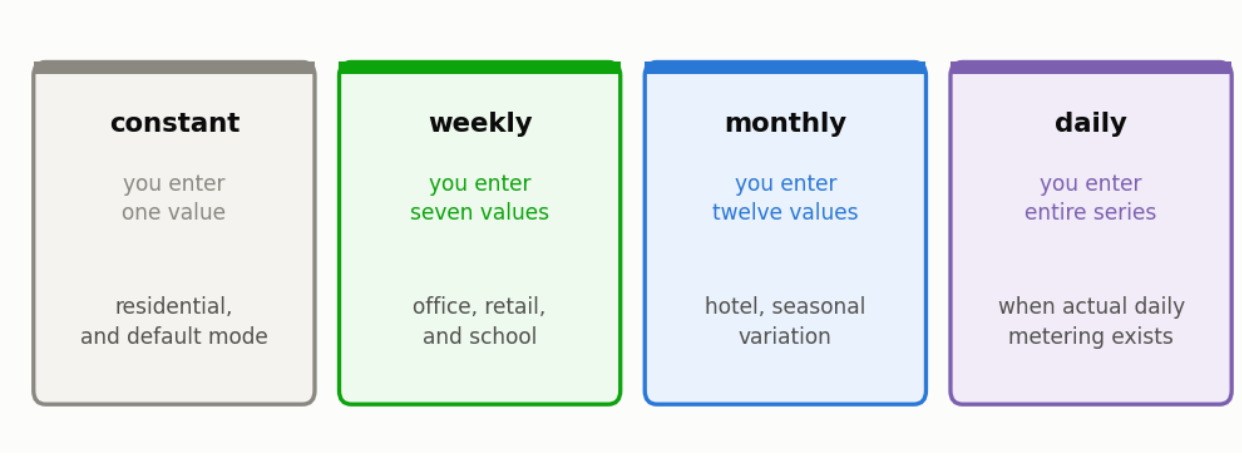


Figure 38 — The four modulation modes, what each one asks of the user and the situation in which each one is justified. The daily mode only makes sense when there is real measurement, because inventing a daily series adds apparent precision without adding information.

In any of them you can modulate three things independently: the **per capita demand**, the **number of occupants** and the **fraction suppliable by rainwater**.

Modulating occupancy is usually more faithful than modulating demand: in a school on holiday it is not that the pupil drinks less water, it is that there is no pupil.

3.4.2. How to fill it in

In step **2. Building & Demand**, choose the mode. The table of the period opens.

- An empty or zero cell **falls back to the constant value**. This is deliberate: it lets you modulate only the months of interest and leave the rest at the default.
- The values can be typed or loaded from CSV.
- In the daily mode, the first day of the demand series lines up with the first day of the **rainfall series**. If the two have different lengths, the demand series is recycled cyclically.

3.4.3. Why this changes the result

Modulating the demand does not change only the annual total consumed; it changes the timing match between supply and demand, which is precisely the problem the tank exists to solve. Two cases from the manual illustrate the reach of this effect.

A school that closes for holidays. The cistern is not drawn on while the pupils are away. Whether that helps depends on when the holiday falls relative to the rain. In the London school of the manual (300 pupils, 40 L per pupil per day, demand modulated by day of the week, a 30,000 L tank), the weekly profile yields 12.58%, against 12.63% for the same annual demand spread evenly: 0.05 percentage points. Rain in London is well distributed through the year, so the weekly rhythm of a school changes almost nothing. A school profile with term and holiday months would test the idea of a closing during the dry season; the manual has no such case.

A beach hotel with concentrated occupancy. In the Cape Town hotel of the manual (800 m^2 of roof, 60 guests, 200 L per guest per day, 45% suppliable by rainwater, a 25,000 L tank), occupancy runs from 95% in January to 20% in June, and the hotel is fullest from December to February, the dry season. Run with the Cape Town series, the monthly profile yields 9.83% against 10.97% for the same annual demand spread evenly (a mean of 5,779.9 L/day): 1.14 percentage points less. The demand is concentrated in the months with the least rain, and the tank, which fills in winter, is drawn down in the dry summer.

The two cases look different, and the rule they support has two parts. A demand spread over the year makes better use of the same tank; a demand concentrated in a few months loses yield, and loses more when those months are the dry ones. The Cape Town hotel combines both effects, concentration and phase: its peak falls in the dry season, and it is not possible to separate the two with this one run. To isolate the effect of concentration, compare the same profile shifted by six months, or against a constant demand.

A difference of more than one percentage point is large for a change that does not alter a single litre of the annual consumption, and it is entirely invisible to any calculation made on means, which is exactly why Triton simulates day by day. The profiles are in Figure 39, and the yield of each one in Figure 40.

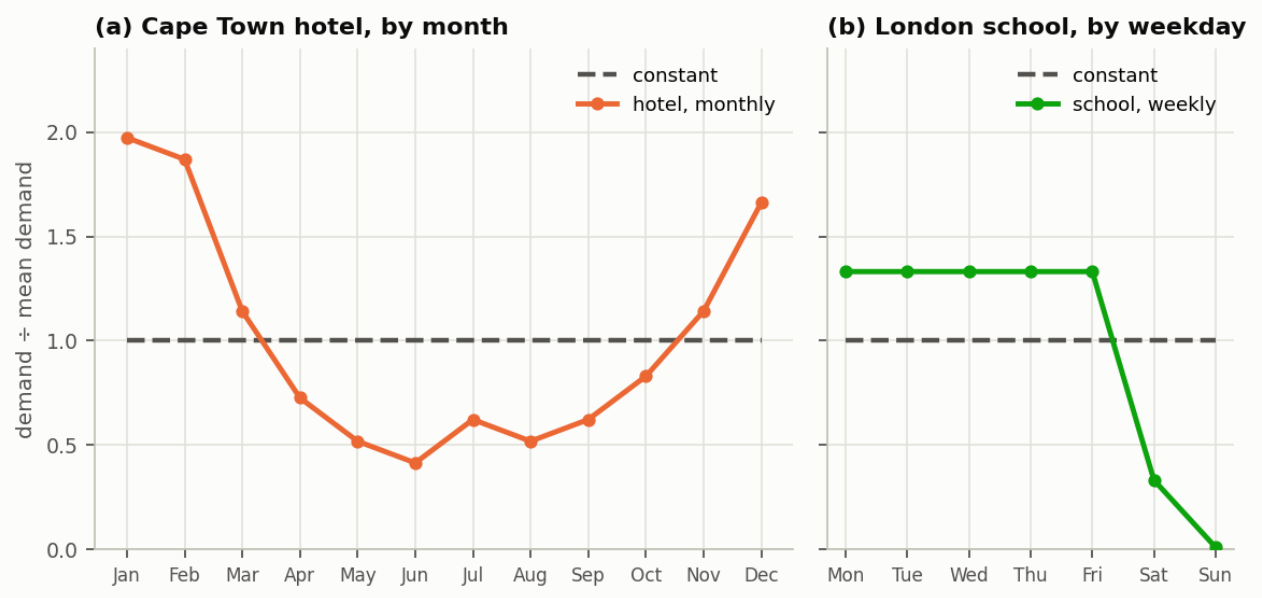


Figure 39 — Demand profiles used in the comparison, expressed as the ratio between the month's demand and the mean demand. All have exactly the same annual consumption; what changes is how it is spread over the twelve months.

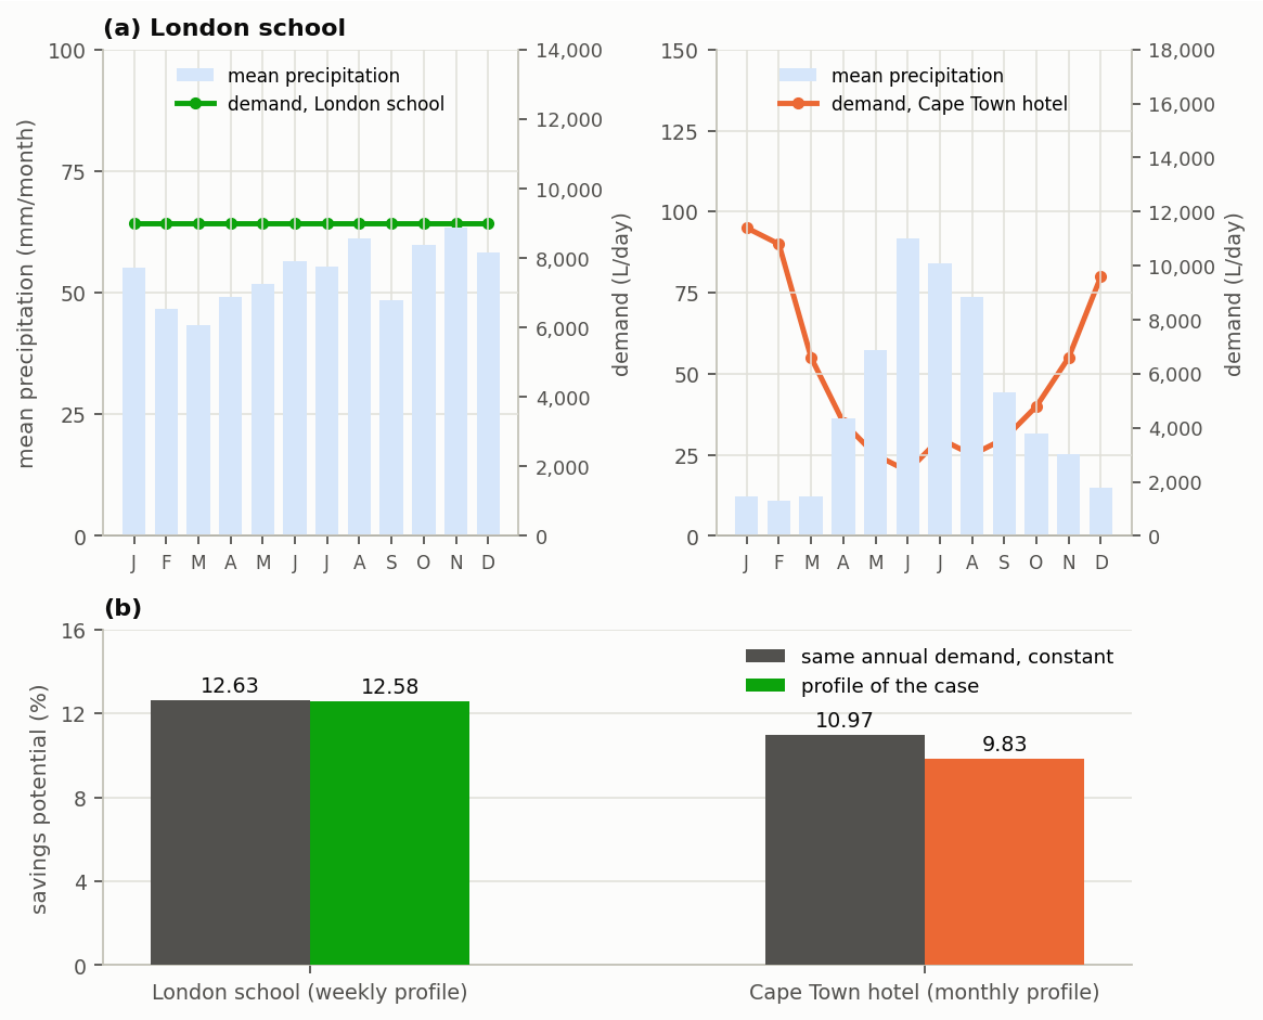


Figure 40 — (a) Demand profiles of the school and the hotel over the mean monthly precipitation of the city of each case; (b) saving potential of each profile against the same annual demand spread evenly. The hotel profile concentrates the demand in the dry months, and it is this concentration that costs it 1.14 percentage points.

3.4.4. The suppliable fraction can also vary

Less obvious and sometimes more important. In a school, the percentage of non-potable use changes between term time and holidays: during the holidays, floor washing and garden watering remain, and they are uses **entirely** suppliable by rain.

Modulating the fraction captures this. Keeping the fraction constant underestimates the yield in the period of low occupancy.

In the table, the «Indoor Non-Potable (%)» column is a percentage, like every field you type in: 28 means 28%. In the project file, the same column is saved as a fraction, 0.28, and section 4.2 explains why. A cell with a value between 0 and 1 turns orange.

3.4.5. Precautions

Do not modulate what you have not measured. An invented modulation adds apparent precision without adding any information, and passes on to the reader the impression of a rigour the data do not have. When in doubt, an explicitly declared constant demand is more honest than an arbitrary monthly profile.

Declare the origin of the profile. It may come from your own measurement, from twelve monthly water and sewage bills, from a bibliographic reference or from an estimate, and those four origins do not carry the

same weight of evidence in a published study.

Check the annual total after modulating. The program shows the mean daily demand resulting from the modulation, and a difference between that value and what was expected is the quickest indicator of an error in filling the table.

3.4.6. The simplest way, when there is one

If you have **twelve water and sewage bills** of the building, you have the measured monthly profile, which is the best possible source. Divide each month's consumption by the number of days and by the number of occupants, and use the monthly mode.

Twelve bills are worth more than any reference from the literature.

3.5. Simulating schools, hospitals and shops

> **Question this guide answers:** does the program work for non-residential buildings?

It does, and it works well for the water side. There is, however, a weighty caveat about the economic side, and it must be known before the study starts, not after it is finished.

3.5.1. The caveat: the tariff category

Utilities charge different tariffs depending on the consumer category (residential, commercial, industrial, public), and the non-residential categories often cost more than the residential one. The program has no catalogue of tariffs: the tariff is always typed in. Enter directly the tariff of the category the building is billed in. The three example projects carry a **residential** tariff, so they are right for a house and would be the wrong tariff for a school, a hotel or a shop.

> **What to do, in five minutes.** Look up your utility's current tariff document, which is usually on its website under «charges» or «tariffs». Find the table of the category of interest. Enter the blocks in the custom mode of the tariff screen, with the corresponding minimum-charge regime. Section 3.3 describes each field. Once that is done, the economic result becomes that of your case, and not a residential approximation.

The two non-residential cases of the manual, the London school and the Cape Town hotel, keep the residential tariff of their city and leave the costs at zero: they compare rainfall and demand, not money. Take their percentages as water results, and do not read an economic conclusion into them.

Declare which category the tariff belongs to. A study that applies a residential tariff to a non-residential building states a limitation, and the direction of the error is usually conservative, because non-residential categories tend to be dearer; but that is a property of the tariff document, and you must check it in yours.

3.5.2. The available building types

The program's eight building types are grouped by the tariff category the utility bills them in, and each one has its own unit of consumption (Figure 41). The unit of consumption changes the meaning of the per capita value entered, and the category decides the block structure of the bill: simulating a school with a residential tariff is one of the mistakes described in section 5.1.

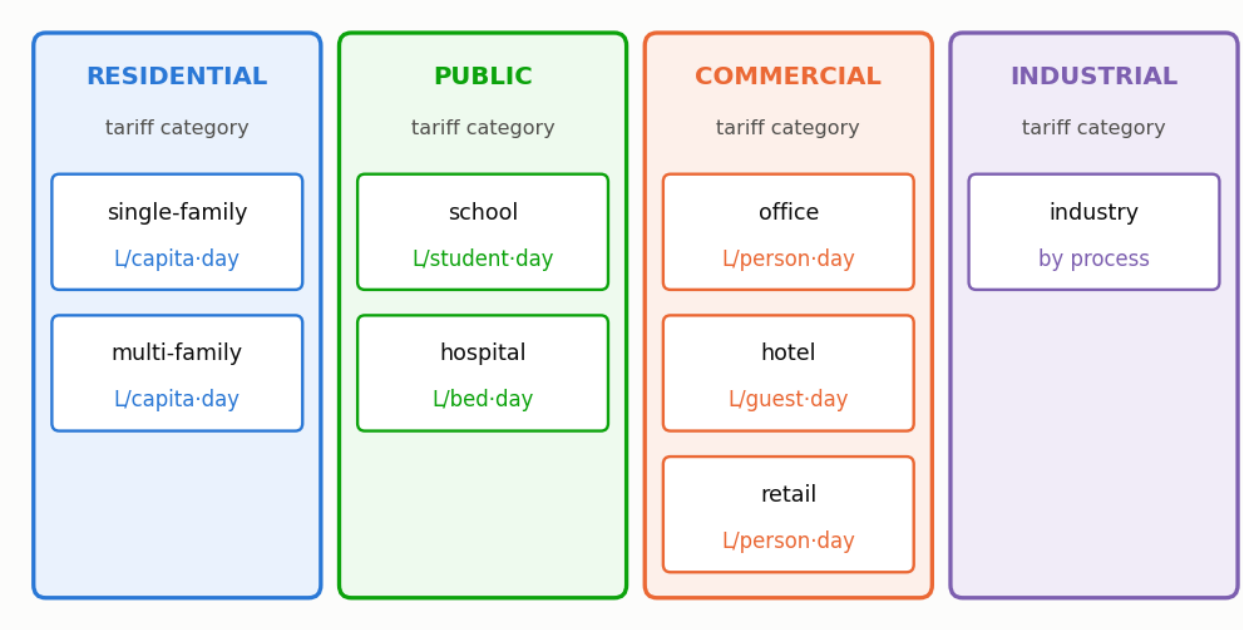


Figure 41 — The eight available building types, grouped by the tariff category the utility charges. The unit of consumption changes with the building type, and it is what gives meaning to the per capita value entered.

3.5.3. What changes with each building type

School. It is a favourable case for rainwater harvesting for two reasons that add up. The non-potable share of consumption is high, because the toilet dominates use and many units have neither showers nor a kitchen. And the roof area per pupil is usually large, so supply is rarely the limiting factor.

Modulation by calendar, however, has an effect that depends on the climate, and it is better to simulate it than to assume the result. The manual's school is in London: 1,200 m^2 of roof, 300 pupils, 40 L per pupil per day, 70% suppliable, a demand modulated by day of the week (40 L on five days, 20 L and 5 L on the weekend days) and a 30,000 L tank. It yields 12.58%, against 12.63% for a constant demand of the same annual total (a mean of 9,014.3 L/day). The weekly rhythm alone changes almost nothing, because London rain is spread through the year and the tank refills during the weekend. A school that closes in a dry season would behave differently, and the monthly profile of section 3.4 is the tool for that case; the manual has no monthly school profile to quote. Section 3.1 shows how the distribution of rain changes from one city to another.

Hospital. The most delicate case. High, continuous consumption, without relevant seasonality, which is good for harvesting. But the **quality requirement** is different: there are uses that do not admit rainwater under any circumstances, and the cooling tower, which would be an ideal use, requires microbiological control against Legionella. Treat the quality class with care, and do not use the program's classes 2 to 4 as if they were a normative requirement: they are criteria adopted by the program, and the requirement of the case is set by the health authority and the applicable standard.

Office and shop. Demand concentrated on working days, five days out of seven. Modulate by week. The non-potable share is high because almost all consumption is toilets, urinals and cleaning. The suppliable fraction varies a great deal between offices, even within one city, and it should come from the building studied whenever possible: measure it, or survey it as described below, before taking a value from a reference.

Hotel. Strong seasonality, and the case in which monthly modulation matters most. See the Cape Town hotel of section 3.4: with occupancy concentrated in the dry summer, it yields 9.83% against 10.97% for the same annual demand spread evenly, a loss of 1.14 percentage points. A concentrated demand wastes tank capacity, and the loss is larger when the concentration falls in the dry season.

3.5.4. Where to get the non-potable fraction from

The suppliable fraction is the ceiling of the saving potential, as section 2.3 shows, and it is therefore the parameter that weighs most on the result of a non-residential building. There are three ways of obtaining it, in decreasing order of reliability.

Measuring the end uses. Sub-meters or flow loggers on the branches, for a few representative weeks. It is the only way that produces a number for the building, and not an average.

Survey by interview and flow. Ask the occupants the frequency and duration of each use and multiply by the measured flows of the fixtures. It costs little and captures the real behaviour of the building, but it depends on the memory of those interviewed.

Reference value from the literature. Acceptable in a preliminary study, as long as the reference is of the same building type, from the same country and, ideally, from the same region. Avoid transposing residential fractions to other building types, and even among dwellings the variation is large, and the toilet share of a household differs a lot from that of an office or a school.

> **Declare the route.** «Suppliable fraction of 60%, measured» and «suppliable fraction of 60%, from a reference» are different studies, and the reader needs to know which of the two they are reading.

3.5.5. Individual metering and the number of dwelling units

In a multi-family building with individual metering, enter the **number of dwelling units**. The program evaluates consumption at the level of **one** unit and multiplies by the number of units.

This matters because of the progressive blocks: a building of twenty apartments with individual metering pays twenty bills in the first block, not one bill that adds up all the consumption and falls in the most expensive block. Treating the building as a single unit would grossly overestimate the saving.

3.5.6. What to declare

Besides what section 4.10 already asks for:

- the **building type** and the unit of consumption adopted;
- the **origin** of the per capita consumption — measurement, reference or standard;
- the **tariff category** entered, and whether it is the one the building is billed in;
- the **modulation profile** and its origin;
- for a hospital, the quality class adopted and what it covers.

3.6. Comparing many cases at once

> **Question this guide answers:** how do I compare dozens of alternatives without redoing the whole project for each one?

The program was built to compare alternatives, and it offers three different ways of doing it. The choice between them is not a matter of preference: each way answers a different question, and using the wrong one costs time without producing the information wanted.

3.6.1. The three ways

Table 89 — The three ways of comparing alternatives depending on what varies between them

If what changes is	Use	Where
only the cistern volume	the sweep	step 4. Tank & Costs
the volume, and you want to decide	the multi-criteria table	step 8. Multi-Criteria Decision
any other assumption	saved projects, one per case	`.triton` file

The first is automatic, the second too, and the third needs organisation.

3.6.2. The sweep: dozens of volumes in one pass

In step **4. Tank & Costs**, choose the **sweep** mode and enter the maximum volume and the step. The program simulates all the volumes of the grid and draws the curve.

The sweep is the normal way of working, not an advanced function reserved for special cases: it is almost always the right answer, because «which volume should I adopt?» is the central question of every rainwater harvesting project. Section 4.4 goes through a complete sweep step by step, and section 2.2 formalises how the grid of volumes is built.

The computational cost is modest and does not justify hesitation: a sweep from 0 to 20,000 L with a 1,000 L step means twenty-one simulations of thirty years each, and it finishes in a few seconds on an ordinary computer.

3.6.3. The multi-criteria table: all volumes, all dimensions

Step **8. Multi-Criteria Decision** shows, in a single table, each volume of the sweep with:

- the water saving and the days of supply;
- the net present value, the discounted payback and the internal rate of return;
- the net carbon at the end of the service life and the environmental payback;
- the TOPSIS score and the SMAA-VIKOR acceptability.

It is the densest way of comparing alternatives the program offers: ten answer columns for each volume row. The ranking itself uses the eight criteria of section 2.10, in four dimensions — technical, economic, environmental and structural. The weights sit in four cards, one per dimension: the dimension weight at the top, 25% by default, and below it the criterion shares of its criteria; the **Equal shares** and **Recalculate** buttons sit below the cards. The **decision profile** sets the four weights at once — equal, 70% on one dimension and 10% on each of the others, or objective weights computed from the results by CRITIC — and the table is re-ranked on the spot. The conclusion gives, for each method, the **choice band** — the volumes

whose result lies within 5% of the score range of the best — and the volume with the highest score, as in «TOPSIS band (equal weights): 2000–3000 L · highest score: 2000 L (0.78)». Section 2.10 explains the methods behind it.

3.6.4. When something other than the volume changes

City, tariff, demand, tank material and building type are parameters the sweep does not go through, and to vary any of them the way is to keep one saved project per case. The procedure below looks bureaucratic at first sight and saves hours of rework, above all when the study is picked up again weeks later.

1. Build the complete project once, in full detail.
2. Save it with a name that describes the case: `school_london_30000.triton`.
3. Change **one** thing, and save it under another name.
4. Run each one, and note the result in a spreadsheet of your own.

The example files of the manual were made this way: `01_tutorial_new_york.triton`, `02_london.triton` and `03_cape_town.triton` are the same project, with the rainfall series and the tariff swapped. That is what section 3.1 compares. (Swapping the city swaps two things at once; the manual does it on purpose, because the tariff does not change the water result, and the water result is what the comparison is about.)

> **Change one thing at a time.** If you change the city and the tariff together, the result changes and there is no way of knowing which of the two moved it. It seems obvious, and it is the most common error in comparative studies.

3.6.5. How to organise the files

A naming convention saves more time than it seems:

```
school_study/
   base.triton
   city_new_york.triton
   city_cape_town.triton
   tariff_commercial.triton
   demand_measured.triton
   results.xlsx
```

And three habits that avoid rework:

Keep the project, not just the result. The `.triton` file has the rain inside it and reproduces the whole study; the results spreadsheet does not.

Note what changes in the file name. Six months later, `test3.triton` means nothing.

Export to a spreadsheet at the end of each round. Step **10. Export** saves the tables in `.xlsx`, and that is where the comparison between cases is put together.

3.6.6. How many cases fit

The program imposes no limit on the number of cases compared, and the real limit is the analyst's patience: each thirty-year simulation takes fractions of a second, but building and checking each project takes minutes, and it is the checking that takes the time.

In practice, a well-run comparative study gathers between five and twenty cases. When the number grows far beyond that, it is usually a sign that the research question was not narrowed down enough — or that the

work is a large-scale study, which needs other tools.

For large-scale studies — factorial matrices of city, area, demand and volume, or uncertainty propagation — the program offers a command-line interface, described next.

3.6.7. The command line

Installing the program as a Python package registers the `triton` command, which runs the same calculation routines as the graphical interface without opening the window; the Windows installer with the graphical interface does not include it. The command line reads `.triton` files, projects in structured JSON and a legacy semicolon-separated text format, and writes the results in text, JSON, CSV, HTML or XLSX. It is the interface suited to reproducible studies, because the command itself documents the assumptions changed.

Table 90 — Subcommands of the command line and the purpose of each one

Subcommand	Purpose
`validate`	checks the structure of the project, the rainfall series and the essential assumptions, without simulating
`run`	simulates the project; by default, only the technical analysis
`analyze`	runs the complete chain: technical, economic, environmental, weight of the system and TOPSIS
`econ`	runs the economic analysis
`init`	creates a template `.triton` project, editable, with the rainfall series referenced or embedded
`init-catalog`	creates a template JSON catalogue of building or climate assumptions
`matrix`	combines a catalogue of assumptions with a catalogue of climates and simulates every combination
`matrix-projects`	runs a list of projects, a folder of rainfall series or the factorial matrix declared in the project
`batch`	runs the scenarios of a CSV or XLSX spreadsheet, from a base project
`uncertainty`	propagates uncertainties by Monte Carlo for one tank volume
`series-length`	answers how many years of rain the project needs, by the method of Geraldi and Ghisi
`stochastic-demand`	draws the daily consumption at random and returns the performance as a range, not as a single number
`estudo`	organises, runs and reports batch studies from JSON (`estudo.json`): many buildings per typology, with paper-ready tables

The subcommands `run`, `analyze` and `econ` accept the same options: `--analysis` chooses the analysis (`technical`, `economic`, `environmental`, `system_weight`, `topsis` or `all`); `--volume` fixes the lower tank volume, in litres; `--rainfall` replaces the project's rainfall series; `--set FIELD=VALUE` changes a project field and can be repeated; `--weights t,e,a,s` gives the four TOPSIS dimension weights — technical, economic, environmental and structural — or eight weights, one per criterion, or `critic` for objective weights computed from the results by the CRITIC method (three weights, as in version 0.1.0, are still accepted, and the structural dimension receives their mean; seven are refused); `--criterion-shares` gives the eight criterion shares, in the order reliability, storage efficiency, net saving, LCOW, payback, CO_2, dry mass and overflow (default `1,1,1,1,1,1,1,1`); `--score-band T` sets the tolerance of the choice band, from 0 to 1 (default `0.05`, 5% of the score range); `--weight-sensitivity N` draws N weight vectors and reports how often each volume wins (with `critic`, it draws the four dimension weights); `--format` and `--output` set the output format and file; and `--seed` fixes the seed of the stochastic analyses, so that the result is reproducible. `--score-band` is accepted by every subcommand that takes `--weights`. In the project file, the same weights go in `analysis.topsis_weights` (four or eight values, or `"critic"`), the shares in `analysis.topsis_criterion_shares` (eight values) and the tolerance in `analysis.topsis_score_band`.

The ranking comes out as a band, not as a single volume. The text output reads «TOPSIS: volumes from A to B L have similar scores (within 5% of the range, from the highest) | highest score at X L (s)»; the HTML report has a «Choice band (TOPSIS)» paragraph; and the JSON carries `topsis.choice_band` — the volumes of the band, the tolerance, whether the band is contiguous and the volume of the highest score — with `topsis.choice_band_min_volume_l`, `topsis.choice_band_max_volume_l` and `smaa_vikor.choice_band`. With `critic`, the weights the program computed are in `topsis.criteria`, one per criterion.

With `--analysis all` (or `system_weight`), `analyze` also reports the **weight of the system**: the dry mass, the water load and the operating load, in kg and kN, split into basement or lower level, roof or upper level, and risers and network. The HTML report, the spreadsheet (sheet `system_weight` for the chosen volume; the values per volume are in the sheet `alternatives`) and the terminal text show it. Its warnings are attention thresholds of the program, not limits of any standard — 500 kg on the roof with the upper tank full, an upper tank above 1,500 L, a cistern above 3,000 kg dry, and any concrete cistern — and each asks you to confirm the load with the structural or foundation design.

Applied to the tutorial project, `validate` and `run` look like this (the command line prints a confirmation in the language of the program's interface):

```
triton validate 04_tutorial_sweep.triton

triton run 04_tutorial_sweep.triton --volume 4000 --format json --output r.json
```

The file `r.json` records the provenance (source project, number of days of the series and start date) and, for the 4,000 L volume, the saving potential of 26.83% and the classification of the days into full, partial and no supply, with 95.3% full days.

The `uncertainty` subcommand draws, in each sample, the precipitation, the catchment area, the demand and the investment with a distribution of declared coefficient of variation, and reports the 5%, 50% and 95% percentiles of the saving potential and of the net present value, with the probability of the net present value being positive. Run it on the tutorial with a modest number of samples and a fixed `--seed`, and read the percentiles of the potential as a range, not as a single number. Because the tutorial system already works close to the 28% ceiling, a moderate variation in rain or demand moves the potential little, whereas the net present value, which in the tutorial is negative with the illustrative costs of section 4.7, moves in proportion to the investment and the tariff. The probabilistic modulation, described in its own chapters, does the same job from the graphical interface.

The `series-length` subcommand does, with no screen time limit, the analysis the sweep step offers in the «is the rainfall series long enough?» button, described in section 2.2. Without `--windows`, it goes through **all** the possible windows, which is the exhaustive mode of the papers; with `--windows N`, it draws N windows per length, with the declared seed. The options `--max-volume`, `--step` and `--threshold` define the grid and the marginal-gain threshold, and `--confidence` and `--tolerance` define the similarity criterion.

The `stochastic-demand` subcommand draws the consumption **day by day** and runs the simulation many times, returning the saving potential, the days of full supply and the overflow as a range between the 5% and 95% percentiles. There are two variation parameters, and the difference between them is what the subcommand has to teach: `--daily-cv` is the variation from one day to the next, and `--level-uncertainty` is the uncertainty about how much the building consumes on average. The first hardly moves the result — drawn independently every day, it cancels out over a thirty-year series —, and the second does. With `--absence` you declare the probability of a day with no consumption at all, such as a trip, and with `--ideal-volume` the program also works out the ideal volume of each realisation, which is what measures whether the design decision withstands the uncertainty of consumption.

This subcommand has no equivalent in the graphical interface, and that is a design decision: there are many parameters, reading them requires care, and on the screen they would confuse more than they would help.

> The subcommands `compare-mass` and `run-vaz-study` run research studies of the group on climate databases of tens of thousands of series, and require the files of those databases; they are not part of the everyday use of the program.

3.6.8. Batch studies from JSON

When the comparison is by **typology** (schools, commercial buildings, single-family and multi-family housing, hospitals, airports) and the result goes into a paper or a conference abstract, keeping one saved project per case and building the spreadsheet by hand stops paying off. The `estudo` subcommand of the command line organises the study in an `estudo.json` file: the base project, the cases, what changes from one case to the next, the analysis and the outputs. The program runs every case in a stable order and writes ready tables.

```
## 3.6. 1. A skeleton study, with the labels of the typology and no value filled in.
triton estudo init .\schools --tipologia escolar

## 3.6. 2. Fill in schools\estudo.json (the «XX» and null entries) and put the .triton files and series in schools\
triton estudo validate .\schools\estudo.json

## 3.6. 3. Run every case (in a stable order); --paralelo N uses N processes and does not change the result.
triton estudo run .\schools\estudo.json --saida .\out\schools --paralelo 4

## 3.6. 4. Rebuild the tables without recomputing (for example after changing metrics or decimal places).
triton estudo resumo .\out\schools

## 3.6. 5. Fill the conference abstract template with the real numbers.
triton estudo texto .\out\schools --modelo .\schools\modelo_texto.md

## 3.6. 6. Several studies (a folder with estudo*.json files), with the comparison between typologies.
triton estudo lote .\studies --saida .\out\comparison

## 3.6. 7. Gather the resultados.csv of many runs into one table (typology, case, metric: minimum, mean, median, ma
triton estudo consolidar .\out --saida .\out\consolidated
```

The typologies (`escolar` school, `comercial` commercial, `residencial-unifamiliar`, `residencial-multifamiliar`, `hospitalar` hospital, `aeroportuario` airport) are structure and labels only: `estudo init --tipologia` writes the label, the `grupo` of the cases and, in a comment, what `usuarios` means in that typology. No number comes with the typology: area, demand, users and share come from your cases, with the source of each.

The `consolidar` action searches every `resultados.csv` under the given folders (several studies, batches, repeated runs) and writes `consolidado.csv` and `consolidado.md` to the output folder: one row per typology (`grupo`), case and metric, with `n`, minimum, mean, median and maximum of the values of the cases that finished (`status` ok). The unit is part of the group key, so different currencies are never mixed. Numbers have the same format as in `resultados.csv` (decimal point, ten significant digits); the Markdown table follows `--idioma`. If the optional `duckdb` package is installed (optional `analise` extra, not part of the installer), it reads and groups the files; without it the standard library does the same, and the two paths give the same bytes (`--motor csv` forces the second; `--motor duckdb` demands the package).

`estudo run` and `estudo lote` show their progress on the error stream. `--progresso simples` writes one line per case (`[i/N] id: ok (t s)`); `--progresso rich` draws a progress bar and needs the optional `rich` package (optional `cli` extra; without it the program warns once and uses `simples`); the default `auto` uses `rich` only if it is installed and the error stream is a terminal. The result files are identical in bytes in every mode, and `--quiet` turns the progress off.

In the `analise` section, `pesos` takes the four dimension weights, eight criterion weights or `"critic"` (three weights, from studies made up to version 0.1.0, are still accepted), `partes_no_eixo` the eight criterion shares

and `tolerancia_faixa` the tolerance of the choice band, from 0 to 1 (default 0.05); a study that declares seven values, from the model of version 0.1.0, is refused at validation. The metrics `faixa_topsis_min_l` and `faixa_topsis_max_l` give the ends of the TOPSIS choice band of each case, so that the tables of a paper report a band and not a single volume.

What each section of `estudo.json` contains, the aliases of the substitutions (catchment area, demand, users, share, tank volume and others) and the output files are in the appendix «Files, folders and formats». The example `examples/estudos/residencial-unifamiliar-exemplo/` runs the tutorial house in New York, London and Cape Town (`new_york.triton`, `london.triton`, `cape_town.triton`): `triton estudo run examples\estudos\residencial-unifamiliar-exemplo\estudo.json --saida out\example`.

The ERA5 example series carry the Open-Meteo/Copernicus credit (CC BY 4.0), which the outputs inherit from `analyze` and repeat in the summary, in the tables and in `resultados.json`. Record the source, period and treatment of any series of your own in the protocol of the study.

> **The program organises; the analyst decides.** No field of the skeleton comes filled in, and an «XX» or a `null` stops the run. The area, demand, number of users and eligible share of each building must come from a source that the study cites. The summary warns when the costs were not entered (CAPEX equal to zero), because then the net present value and the payback are not results.

3.7. Sensitivity analysis

> **Question this guide answers:** which assumption moves my result the most, and how much can it take?

Every rainwater harvesting study rests on uncertain assumptions, and the three most influential are usually precisely the least verifiable: will the tariff really rise 5% a year for twenty years? Is the demand really 150 litres per person per day? Will the cistern cost what the quotation says?

Sensitivity analysis measures how much of these doubts reaches the final result. It does not remove the uncertainty, and does not try to; it measures the size of the uncertainty, which is exactly the information the reader needs to decide how far to trust the number presented.

3.7.1. The procedure, in three steps

The procedure needs no specialised tool, and it is the same as in any engineering analysis faced with a poorly known parameter: vary one thing at a time and observe the effect.

1. **Choose the assumption** you suspect is the most influential.
2. **Run the project three times**: with the likely value, a low value and a high one.
3. **Note the result of the three** and compare.

Repeat the procedure for each doubtful assumption. In the end you will have identified which of them actually move the result and which are irrelevant — and that separation is worth more than any refinement of the central value, because it shows where to invest data-collection effort. Section 3.6 shows how to organise the files so that the set of runs does not turn into confusion.

3.7.2. Which range to adopt for each assumption

The range of variation to adopt for each assumption is not a matter of guesswork: it follows from what is known about the origin of the data, and a measured value admits a much narrower range than a value taken from the literature (Figure 42). The tariff escalation is expressed in percentage points per year; the other ranges, as a percentage of the value adopted.

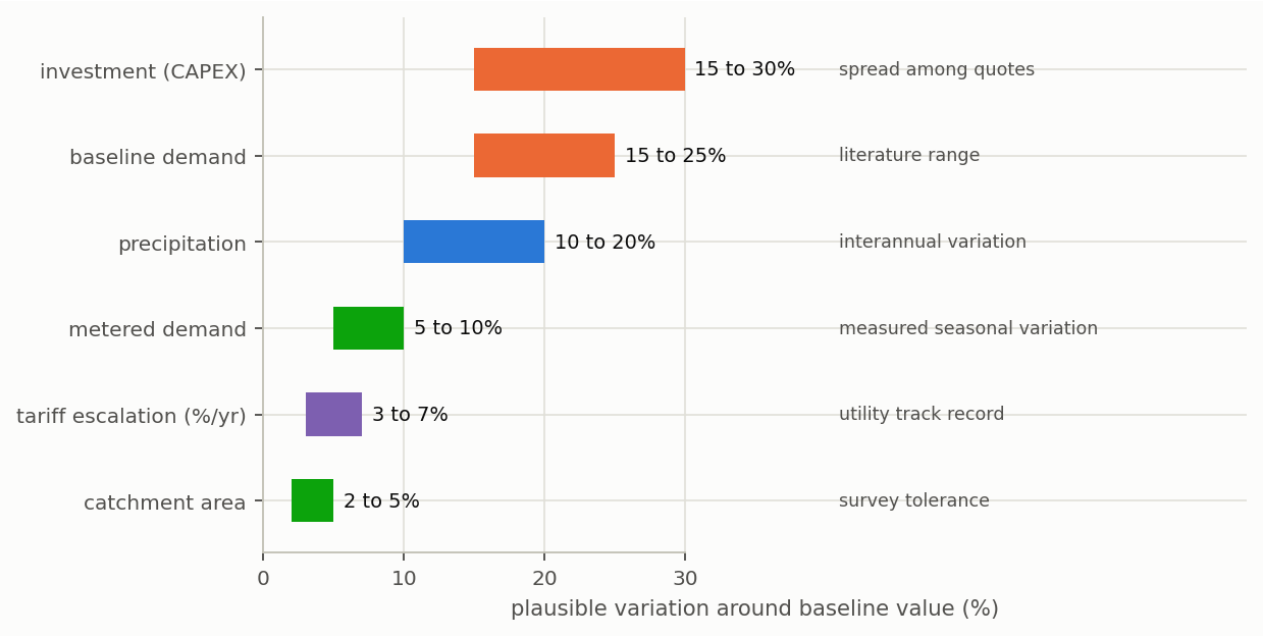


Figure 42 — Plausible range of variation of each assumption in a sensitivity analysis, with the origin of the uncertainty. The widest ranges correspond to assumptions taken from a reference, not measured in the project.

> **Do not perturb what you know.** If the area was measured in a survey, the range is narrow; widening it produces an artificial uncertainty that dilutes the result and hides the assumption that really matters.

3.7.3. The assumptions that dominate the economic result

In economic studies of rainwater harvesting, the assumptions that move the result most are those that act over the whole analysis horizon: the analysis period itself, the volume of rainwater actually consumed, the minimum attractive rate of return and the **tariff escalation**. The escalation deserves particular attention because it is the least verifiable and it compounds: five per cent a year for twenty years multiplies the tariff by 2.65; three per cent, by 1.81; and seven per cent, by 3.87. The saving of the last years follows that factor, and the choice of escalation rate can decide a good part of the study's economic conclusion.

Try it on your case: in step **6. Economic Results**, change the annual escalation to 3%, note the NPV, repeat with 5% and with 7%. Three runs, three minutes, and a range instead of a number.

> **In a paper, show that range.** A single net present value, calculated with a 5% annual escalation and presented without sensitivity, suggests a precision the assumption does not have.

3.7.3.1. The tutorial, assumption by assumption

The table below applies the procedure to the final tutorial project, in New York: 4,000 L in polyethylene, pumping to a 1,000 L tank, with the illustrative costs of the manual (illustrative, not market prices). The likely net present value is negative, about −US$ 3,020. The table varies five assumptions, one at a time, between a low and a high value.

Table 91 — Potential, net present value and payback of the final tutorial project with each assumption varied alone, from the low to the high value (costs are illustrative, not market prices)

Assumption	Low	Likely	High	Potential	20-year NPV (illustrative, not a market price)	Discounted payback
tariff escalation, water and sewer, % per year	1.0	3.0	5.0	27.09% to 27.09%	−US$ 3,760 to −US$ 2,093	no payback to no payback
minimum attractive rate of return, % per month	0.2	0.4	0.6	27.09% to 27.09%	−US$ 2,149 to −US$ 3,659	no payback to no payback
per capita consumption, L/person·day	120.0	150.0	180.0	27.64% to 26.09%	−US$ 3,892 to −US$ 2,282	no payback to no payback
suppliable fraction, %	20.0	28.0	40.0	19.84% to 35.26%	−US$ 4,289 to −US$ 1,590	no payback to no payback
cistern price, % of the budget	70.0	100.0	130.0	27.09% to 27.09%	−US$ 2,330 to −US$ 3,710	no payback to no payback

The first thing to read is what does **not** happen: no assumption, at the low or at the high value, makes the net present value positive, and none produces a payback. With the New York tariff and these costs, the tutorial system does not pay for itself within twenty years, and no single doubt in the inputs changes that. The reason is the price of water, which is low relative to the cost of the works; it is not a defect of the example. Read the rest of the table with this in mind: the question is not which assumption makes the project viable, but which one moves the result most.

The one that moves it most is the suppliable fraction. From 20% to 40%, the potential goes from 19.84% to 35.26% and the net present value from −US$ 4,289 to −US$ 1,590, the widest range of the five. It is the assumption section 4.2 fixed and that depends on the decision about uses, not on measurement: including or not the washing machine, against the quality criterion applicable to the case, moves the result more than any economic parameter.

Those decided by the market and the household weigh next. The tariff escalation moves the net present value from −US$ 3,760 (1% a year) to −US$ 2,093 (5% a year), and the minimum attractive rate of return from −US$ 2,149 (0.2% a month) to −US$ 3,659 (0.6% a month); neither touches the potential. Per capita consumption moves both: from 120 to 180 L per person per day, the potential falls from 27.64% to 26.09% while the net present value rises from −US$ 3,892 to −US$ 2,282. With more consumption the suppliable fraction applies to a larger demand, the cistern runs short more often, the potential falls a little, and the saving in money rises.

The one that seemed important hardly weighs. Between 70% and 130% of the cistern price, the net present value goes from −US$ 2,330 to −US$ 3,710, a range smaller than the others. The polyethylene cistern is a small share of the investment, and labour, piping and accessories, which do not vary with the volume, dominate the account.

The result reverses the intuition of anyone who prices before simulating: spending time quoting the cistern is worth less than spending time defining the uses.

3.7.4. The sensitivity the program does by itself

There is one case in which the sensitivity analysis comes ready and needs no additional runs, and it concerns the final decision of the study: the choice of volume as a function of the weights given to the criteria.

In step **8. Multi-Criteria Decision**, the **SMAA-VIKOR acceptability** column is already a ready-made sensitivity analysis. It answers: if the weights were drawn at random instead of fixed, with each dimension weighing 25% on average, how often would each volume come first?

Read it like this:

Table 92 — Reading the SMAA-VIKOR acceptability of the winning volume

Acceptability of the winning volume	What it means
above 70%	robust recommendation; the weights hardly matter
between 40 and 70%	reasonable recommendation, and it is worth declaring the second option
below 40%	the choice depends on the weights, and the text must say so

The distinction this column allows is epistemological, not only statistical: a volume that wins in 80% of the weight draws is a recommendation, whereas a volume that wins in 30% is a preference of the analyst, legitimate as long as it is presented as such. In the New York tutorial the most accepted volume, 2,000 L, comes first in 39.6% of the draws, with 3,000 L second at 25.8% and 4,000 L third at 17.7%: below 40%, so the choice depends on the weights, and the text must say so. Section 2.10 sets out the method that produces these numbers.

The tornado chart (Figure 43) is the established way of presenting this set: one bar per assumption, ordered by range, with the two variations in different colours. Read from top to bottom, it answers the question the reviewer will ask first, which is on which assumption the result depends.

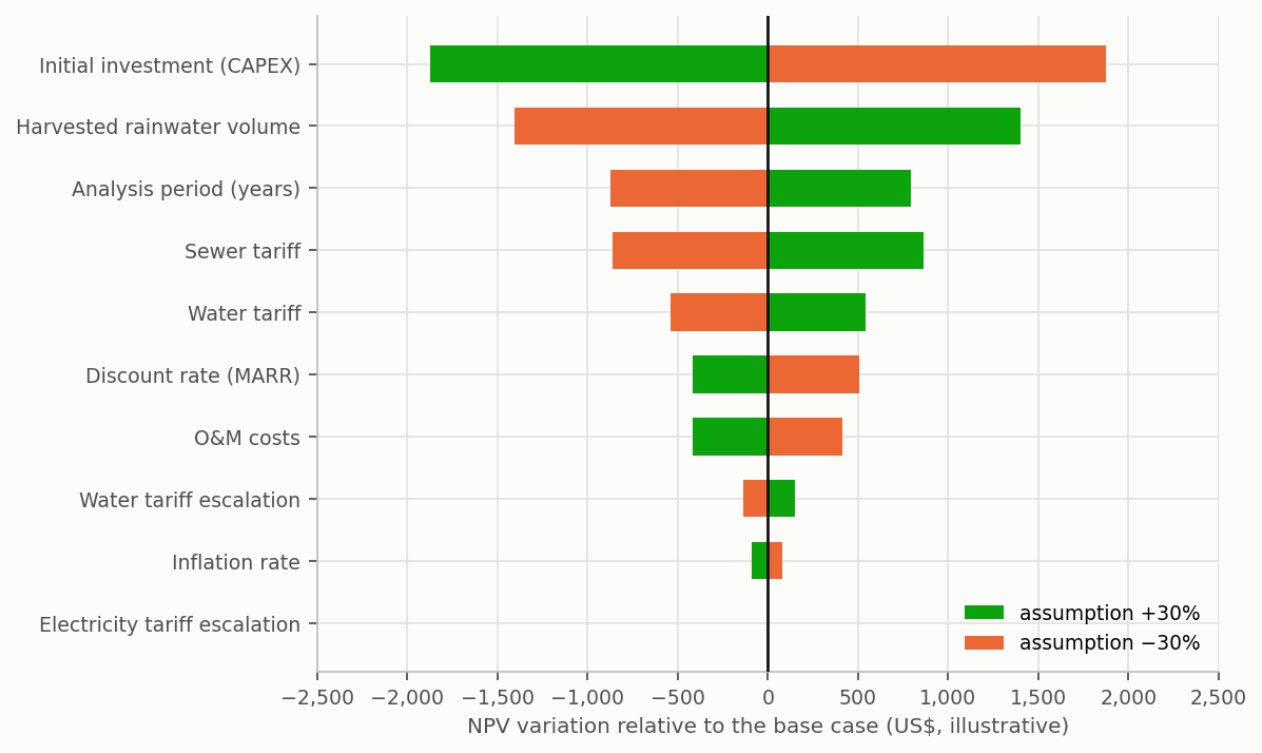


Figure 43 — The variation of the net present value when each assumption is changed by 30% up and down, keeping the others. The colour identifies the variation applied, not the sign of the effect: that is what makes it possible to see that raising the minimum attractive rate lowers the present value, whereas raising the tariff increases it. The base case of this figure comes from the program's simplified economic model, which discounts an annual flow with a single marginal tariff and the declared escalation; that is why the base-case present value does not match that of the tutorial's monthly cash flow. What the tornado measures is the relative sensitivity, not the absolute value.

3.7.5. How to present it

Three ways, from the simplest to the most complete:

Scenario table. Pessimistic, likely and optimistic, with the assumptions of each one declared. Simple, honest and enough for most work.

Tornado chart. One bar per assumption, showing how much the result varies when it varies alone. It ranks the assumptions by importance and is the most informative presentation per area of page.

Distribution. The full range of the result, when all the assumptions vary together. It requires declaring the distributions adopted, not just the ranges.

> **IN DEPTH · PROPAGATION BY MONTE CARLO**
> The third way is done by drawing thousands of combinations of assumptions and accumulating the distribution of the result. The program does this propagation with the `uncertainty` subcommand of the command line, described in section 3.6. For a course or design study, the scenario table of the first item answers the same question with a fraction of the effort — and it is easier to defend, because each scenario has assumptions that can be read.

3.7.6. What to declare

- the **ranges** adopted and the origin of each one;
- how many runs were made, and with which values;
- for the choice of volume, the **choice band** with its tolerance and the **acceptability** of the most accepted volume;
- **which assumptions were not perturbed**, and why.

The last is the one most often forgotten, and the one a reviewer most often asks for.

3.8. Importing a legacy project

> **Question this guide answers:** do my old studies open in Triton?

Studies saved in the legacy text format of an earlier simulation tool open in Triton, and most of the data cross the conversion without loss. The care this section asks for comes from two facts that sit badly together: some fields do not cross, and the import does not say which. A study reused without checking can therefore keep looking like the original study while simulating something else.

3.8.1. How to import

Just open the old file from the open-project menu. The program recognises the legacy format, which is semicolon-separated text, and converts it into the internal structure of the current version. Once converted, save the project: it is then saved in Triton's JSON format, with the fields described in appendix A, and the original file stays intact on disk, which is worth keeping as evidence of the previous study.

3.8.2. What comes across

Practically the whole input core of the legacy format has a direct counterpart in the current version, and is converted without user intervention. The table below lists what the import recovers.

Table 93 — Legacy-format data recovered by the import

Item	Comes across?
rainfall file and start date	yes
catchment area, runoff coefficient	yes
first flush and mode	yes
total demand and number of residents	yes
percentage suppliable by rainwater	yes
upper tank, pumping trigger level	yes
lower tank, range and step	yes
difference between potentials	yes
water and sewage tariffs, taxes	yes
initial costs: labour, piping, accessories	yes
pump: power, efficiency, flow rate, start-up time, cost	yes
electricity tariff and taxes	yes
inflation, escalation, analysis period, minimum attractive rate	yes
operating costs	yes

3.8.3. What does not come across

> **Warning, and always check.** The reader of old files **does not recognise any variable demand key**. A legacy project that used a monthly or daily demand is imported as a **constant** demand, without any warning.

The consequence of this limitation deserves to be spelled out, because it changes results without changing the appearance of the project. If the original study modulated the demand by calendar (a school on holiday, a seasonal hotel), the import degrades it to a uniform consumption, and the mismatch between supply and demand that the modulation represented disappears from the calculation. In the Cape Town hotel of the manual, that degradation would turn 9.83% into 10.97%. Check the demand mode right after importing, and re-enter the profile by hand if it is on «constant» when it should not be. Section 3.4 shows how.

There is also a set of parameters that do not come across for a different reason: they simply did not exist in the legacy format. They are irrigation and the suppression of watering by rain, the water quality class and the treatment line, the tank materials and the pipe lengths per diameter, the life cycle assessment parameters, the building type and the number of dwelling units. All take the default value of the current version, and all deserve review before the imported project is considered ready.

3.8.4. Why the result changes

Even if the import recovers all the input data perfectly, the simulation result may not be identical to that of the previous tool. The difference is deliberate and has a known cause.

The main cause is the **treatment of the first flush**. The legacy rule treats the first-flush depth as an event threshold: when the day's rain does not reach the depth, nothing is collected; when it exceeds it, the whole rain is collected, without subtraction. Triton subtracts the depth from the day's precipitation, which is physically more faithful, because the water diverted to the self-cleaning device really does not reach the cistern. With the same inputs, the legacy rule therefore returns a higher saving potential than Triton does, and the gap is larger where light rain on many days is common. Section 6.1 deals with the comparison.

3.8.5. Comparing the two tools correctly

When the work explicitly compares the two tools, there is a simple procedure that isolates the behaviour of the water balance from the deliberate methodological divergence, and it needs no feature of the program: **run both with a first flush of zero**. Without a first flush, the two rules coincide by construction, and any remaining difference is attributable to the implementation, not to the method.

Once that comparison is made, repeat it with the project's real first flush to measure the total difference. Taken together, the two numbers separate what is a deliberate change of method from what would be an eventual divergence of implementation, and that separation is exactly what a reviewer asks for.

> The program has no option to emulate the old first-flush rule. Use the zero-first-flush route, which produces the same result with a little more work and no surprises.

3.8.6. After importing

Seven checks are enough to turn an imported project into a reliable one, and they should be done in the order below, because the first ones affect the result of the following ones.

1. **Demand mode**: was it degraded to constant?
2. **Building type**: is it the right one?
3. **Tank materials**: the default adopted is polyethylene.
4. **Water quality class** and disinfection technology.
5. **Tariff regime**: the legacy format did not distinguish the minimum-charge regimes, and section 3.3 shows what that changes.

6. **Motor efficiency** of the pump, which the legacy format did not have.
7. **Run the project and check the potential** against the old result before trusting the imported file.

And keep the original file: it is the documentary evidence of the previous study, and no conversion replaces it.

3.9. Exporting to CAD, BIM and spreadsheets

> **Question this guide answers:** how do I take the result to the construction design and to my own analysis?

3.9.1. What each format carries

Table 94 — Export formats and the purpose of each one

Format	Extension	What it carries	What for
report	HTML, PDF	complete result and assumptions	delivery
spreadsheet	XLSX	daily series and sweep	re-analysis
audit	XLSX	every field of the assumptions, the tariff, the treatment, the LCA, the economics and the arrangement	checking
drawing	DXF	sized hydraulic diagram	construction design
BIM manifest	JSON	components with type, position, level and parameters	import into Revit
project	TRITON	all the steps and the rainfall series	reopening and auditing

3.9.2. The project file

The `.triton` format is the only one that keeps the whole study: the nine steps, the multi-criteria weights, the LCA routes and the **daily rainfall series**, embedded in the file itself. A `.triton` file reopens on another computer without the source CSV and reproduces the same number; it is with it that the cases of appendix J are distributed. The legacy CSV format of the earlier tool is still available in the export, marked as legacy, because it does not keep the steps added since then.

3.9.3. Spreadsheet

Exporting to a spreadsheet is the way for anyone who intends to do their own analysis of the results, whether to build a chart the program does not offer, or to combine Triton's numbers with data from another source. Two data sets are available, and they answer different questions.

The **daily series** has one row per simulated day, with the recorded rain, the effective rain after the first flush, the collected volume, the day's demand, the rainwater consumption, the mains consumption, the overflow, the volume stored in both tanks, the volume pumped and the supply class. It is the basis of any chart or statistic the program does not offer ready-made, and it is what is used when the intended analysis differs from the one the program does.

The **sweep** has one row per simulated volume, with all the indicators calculated for each. It is the basis of the diminishing-returns curve presented in section 4.4, and the right format for anyone who wants to redraw it with another presentation.

Step **10. Export** builds the spreadsheet from six sets, ticked one by one: the executive summary with the project metadata, the daily water balance, the sweep curve with reliability, the year-by-year cash flow, the life cycle inventory and the multi-criteria decision matrix. Three choices complete the export:

Table 95 — Spreadsheet export options and when to use each one

Option	Choices	When to use
format	XLSX, CSV or JSON	XLSX to open in Excel; CSV for R, Python or another program; JSON for integration
CSV separator	semicolon or comma	semicolon in Excel set to a decimal-comma locale; comma in R and most international tools
time filter	first typical year or full series	the year to illustrate; the full series for any statistic
economic horizon	10, 20, 25 or 30 years	20 years, a common design life for plumbing components, unless the study justifies another

3.9.3.1. Exporting everything, for audit

The **Export EVERYTHING (audit)** button, next to the spreadsheet export, saves a single Excel file with the six sheets above and, besides them, sheets nobody chooses: they go through **every** field of what the program used. They are the project assumptions, one row per parameter, with the value and the description taken from the code itself; the tariff applied, with the meaning of each block code, the regime, the sewage mode and the bill for consumptions from 0 to 50 m^3; the treatment line sized in the quality step, with the stages, the doses and the carbon the LCA adds; the life cycle inventory item by item; the results of the simulation, the economics and the multi-criteria decision; and the 3D arrangement, with each part, each run and the take-off by diameter. The «0_Leia_me» (read-me) sheet says what is in each one.

It is the file for anyone who needs to check a calculation from start to finish, or to answer an assessor who asks what went into the carbon or the saving. A new parameter in the program appears in it without anyone having to remember to add it.

> **A warning about size.** Thirty years of daily series are 10,950 rows per simulation. A sweep of twelve volumes with a detailed series generates a hundred and thirty thousand rows. Export the detailed series only for the volume of interest.

3.9.4. Drawing in DXF

The program generates the hydraulic diagram of the sized system: cistern, filter, first flush, pump when there is one, upper tank, and the piping with the diameters adopted.

What the program produces is a **diagram**, not a construction design. It represents the components of the system and the logical connections between them, with the diameters adopted, and serves as a basis for the designer to draw the installation in plan, with the levels, the routing and the real clashes of the building. A diagram does not replace a plumbing design, and delivering it as one would be an error of professional responsibility.

Nor does the diagram carry, and the construction design must add, the installation requirements that the applicable national rules set for non-potable water:

- rainwater piping identified by colour and by an inscription such as «NON-POTABLE WATER», at regular intervals on exposed pipes;
- a distribution system independent of the potable one, without cross-connection, with an air gap on the backup supply from the mains;
- restricted-use points, such as the garden tap, with a non-potable sign;
- separate potable and non-potable tanks, with a clear separation between them;
- pumping according to the rules for building water supply, which usually call for a standby pump.

The colours, the wording and the distances differ from one country to the next; check the rule of the place of the building and write it on the drawing.

What the program does **not** size:

- routing and slope of the piping;
- real head loss of the installation;
- hydraulic arrangement of the first-flush device, of which the program calculates only the volume, `A × d_f`, and the cost;
- overflow and connection to the drainage;
- foundation and waterproofing of the cistern.

3.9.5. Block library and BIM manifest

In step **10. Export**, the *Block Library for Plans + BIM JSON* mode saves the DXF blocks of the components at 1:1 scale, in millimetres, and, next to them, the `*_triton-bim.json` file. The program does not export IFC. The JSON manifest is the contract between the sizing and the model: each instance declares the component type, the level, the local position in millimetres, the rotation and the sized parameters, such as capacity and diameter, and the structure is validated before saving.

The integration with Autodesk Revit is done by an importer distributed with the program, run in the CPython 3 engine of pyRevit, with a document open in Revit 2022 or later, and it inserts the instances of the manifest using the families indicated in `family_mapping.json`, which associates each program type — cistern, upper tank, filter, first flush, pump set, valves, non-return valve, air gap, overflow, non-potable point of use, calmed inlet, floating suction, level switch, solenoid valve, water meter, foot valve with strainer, vent and control panel — with a family and a type of the office.

With no saved organisation, the program pre-fills the usual arrangement of these installations, from the study: roof collection, filter and first flush; cistern with a calmed inlet, abstraction by floating suction with a foot valve and strainer, a level switch against dry running, a screened vent and an overflow with a trapped outlet and anti-backflow valve to the storm drain; isolation valves on both sides of the pump set, a non-return valve on the rising main and a control panel; an upper tank with a level switch, screened vent, overflow with visible discharge, cleaning outlet with a valve and distribution with a valve to an identified point of use; and the potable backup supply — water meter, valve and solenoid valve — which only opens when rainwater runs out and discharges into the upper tank through an air gap, as good practice requires. The control panel decides: with the upper tank at the start level and water in the cistern, it starts the pump; with the cistern at the minimum, it blocks the pump and opens the solenoid, which fills the tank only up to the backup float, lower, so as to leave room for the next rain. Pump and solenoid never run together. In the volumetry, the control cables — from the level switches to the panel and from it to the pump and the solenoid — appear dashed, and the complete logic is on the panel's data sheet. The arrangement is a starting point: positions, routes and parts belong to the designer.

The arrangement follows two choices of the project:

- **Number of pump sets.** With two, the standby is drawn in parallel with the duty pump, with its own isolation valve on the suction, non-return valve and isolation valve on the delivery. It connects to the duty pump's lines by tees.
- **Supply arrangement.** It changes what exists in the installation:
  - **Pumping to an upper tank:** it is the arrangement described above.
  - **Direct pressurisation:** there is no upper tank. The pressure pump takes the water from the cistern straight to the point of use. The potable backup supply discharges into the cistern itself, also through an air gap, and only up to a backup float installed in it.

- **Gravity:** there is no pump. The cistern sits on a base, above the point of use, and the water leaves by a low side outlet with a valve. The potable backup supply discharges into the cistern, as with pressurisation.

While the runs have not been organised, the arrangement is rebuilt at each change of the volume, the supply or the number of pumps.

With these data the program also builds the sheet of the 3D diagram, not to scale and on an A3 landscape sheet. Only the levels that organise the installation — cistern, upper tank, pump set, filter and first flush — get a level plane; the small parts appear on the drawing by their code, and the type and level of each one are in the «Parts and accessories» table, next to the assembly sequence and the take-off by diameter.

The importer does not create families or replace components by approximation: an instance without a family or without a corresponding level is listed as pending at the end of the import. The coordinates are local, and the tie to the project base point and north is done in Revit, by the designer. The manifest serves coordination and quantity take-off, and does not replace the modelling of the plumbing installation.

3.9.5.1. From the arrangement to the CAPEX and the LCA

The same arrangement feeds the cost and the carbon. The program takes off, part by part:

- the metres of pipe per diameter;
- the bends, one per change of direction of the route;
- the fittings, one at each end of a route connected to a part;
- each part of the manifest, by type;
- the metres of control cable.

Each item has a mass and, in an edition that carries a price list, a price that goes to the CAPEX: pipes and fittings under *Piping*, parts and cables under *Accessories*. **In the International Edition the layout sets no prices**: piping and accessories are the values you type in the economic step (section 4.7). The mass, times the material factor, goes to the LCA in stage A1–A3. Cistern, upper tank and pump set already have their own line in both analyses and are not counted again. The filter and the first flush enter the CAPEX through the treatment line, when it is active, and the LCA through the first-flush subsystem, when it is active.

An automatic test checks that no part, no metre of pipe, no bend, no tee and no cable of the arrangement is left without cost or without carbon. The test covers the three supply arrangements, with one and with two pump sets. The `Auditoria_Quantitativo` sheet of *Export everything* lists each item with its destination in the CAPEX and the LCA, and closes the sum against the values the analyses used. The same sheet also checks whether the arrangement is consistent with the project: an arrangement organised by hand can fall behind when the project changes the supply or the number of pumps, and the divergence shows up there.

The masses and the reference prices of the parts are a scenario, not a quotation or a measurement. They are in `costs_database.json`, under the `pecas_do_arranjo` key. The reference prices of the cost database are not applied in the International Edition: the costs, including those of piping and accessories, are typed in the economic step, in the currency of the project, and the manual's own cases use round figures stated as illustrative, not market prices.

3.9.6. Reports

The three of section 4.10: executive, environmental with ESG, and research. In HTML for consultation and in PDF for delivery.

> The program has two PDF generators and uses the most complete one the computer allows. When it falls back to the alternative, the document comes out simpler, with the same content and the same numbers.

3.9.7. A filing tip

When closing a study, keep together, in the same folder:

1. the `.triton` file;
2. the **rainfall series** used, or its exact identification in the database;
3. the research report in PDF;
4. the sweep spreadsheet;
5. if there was a batch, the **script** with the commands;
6. a text file with the **program version**.

Six items that make the study reproducible five years from now. Without them, the PDF report is just a claim.

4. Tutorial: one example from start to finish

4.1. The project and the rain

> By the end of this section you will have a project created, a precipitation series loaded and the catchment defined. And you will know why each of these three numbers matters more than it seems.

The ten sections of this chapter build **a single project**, from start to finish. With each section the study gains a layer, and the result changes. Keep the file: it is the same up to section 4.10.

4.1.1. The project

A single-family house in New York. Four residents, a 150 m^2 pitched roof, a cistern buried in the back yard. It is a deliberately ordinary case, so that the method stands out rather than the building.

New York is chosen for three reasons. The rainfall series is long and complete, 30 years of daily values. The water and sewer tariff, set by the city's Water Board, is public and auditable. And the local rainfall regime is well distributed over the year, which — as section 4.4 will show — shapes the choice of volume. Section 3.1 takes the same building to London and Cape Town and shows how much the climate alone changes.

> **Your own site.** The tutorial runs on the sample series and the tariff that come with the program. For a real project, replace them with the series measured at the site and the tariff you pay, as section 4.7 explains; the hydraulic method is the same.

4.1.2. The precipitation series

Open step **1. Project & Rainfall**. There are two ways to provide the rain.

Your own file. A CSV with one daily reading per line, in millimetres, in a single column. It is the way for anyone with data from a specific station, such as the national meteorological service of the country concerned.

A sample series. The program ships with three: New York, London and Cape Town, daily precipitation for 1991 to 2020 from the ERA5 reanalysis. They are grid-point data, not rain-gauge records, so they suit tutorials and first studies; for a design, use the measured series of the site. Section 3.2 shows how to test a climate scenario.

For our project, use the New York series that comes with the program. It has exactly 30 years, and no trimming is needed.

Table 96 — Characteristics of the New York precipitation series used in the tutorial

The New York series	Value
days in the series	10,958
years	30.0
mean annual precipitation	1,125 mm
days with rain	44%
mean rain on rainy days	7.1 mm
largest daily rainfall	128.2 mm
days below the first-flush depth	17%

Three numbers in this table decide the project, and it is worth looking at them before any simulation.

1,125 mm per year is a generous supply for this roof. The gross supply, about 143 m^3 per year, is more than twice the rainwater demand of the house (section 4.2), which means the limiting factor of the system will not be the supply of water, but the demand and the size of the tank.

It rains on 44% of the days. Frequent, well-distributed rain favours small tanks: the cistern fills many times a year instead of having to get through a long dry spell. Compare with Cape Town, in section 3.1, where the rain concentrates in winter (the wettest month receives 8.3 times the driest) and the same tank yields about half.

Seventeen per cent of the days have rain, but below 2 mm. Those days will be diverted entirely, and the item on the first flush, further on, explains why.

> **How many years of series to use.** Thirty is comfortable. Below ten, the result starts to depend on the stretch chosen; below five, the bias of the empty tank at the start of the simulation weighs noticeably. Section 5.1 deals with this mistake in detail.

It is worth looking at a whole series before using it. Thirty years of New York are not thirty similar years: the annual totals differ from year to year, and it is this variation that an annual mean erases. The daily distribution tells the rest of the story — most days have no rain at all, and the annual volume is delivered by a small number of intense days (Figure 44).

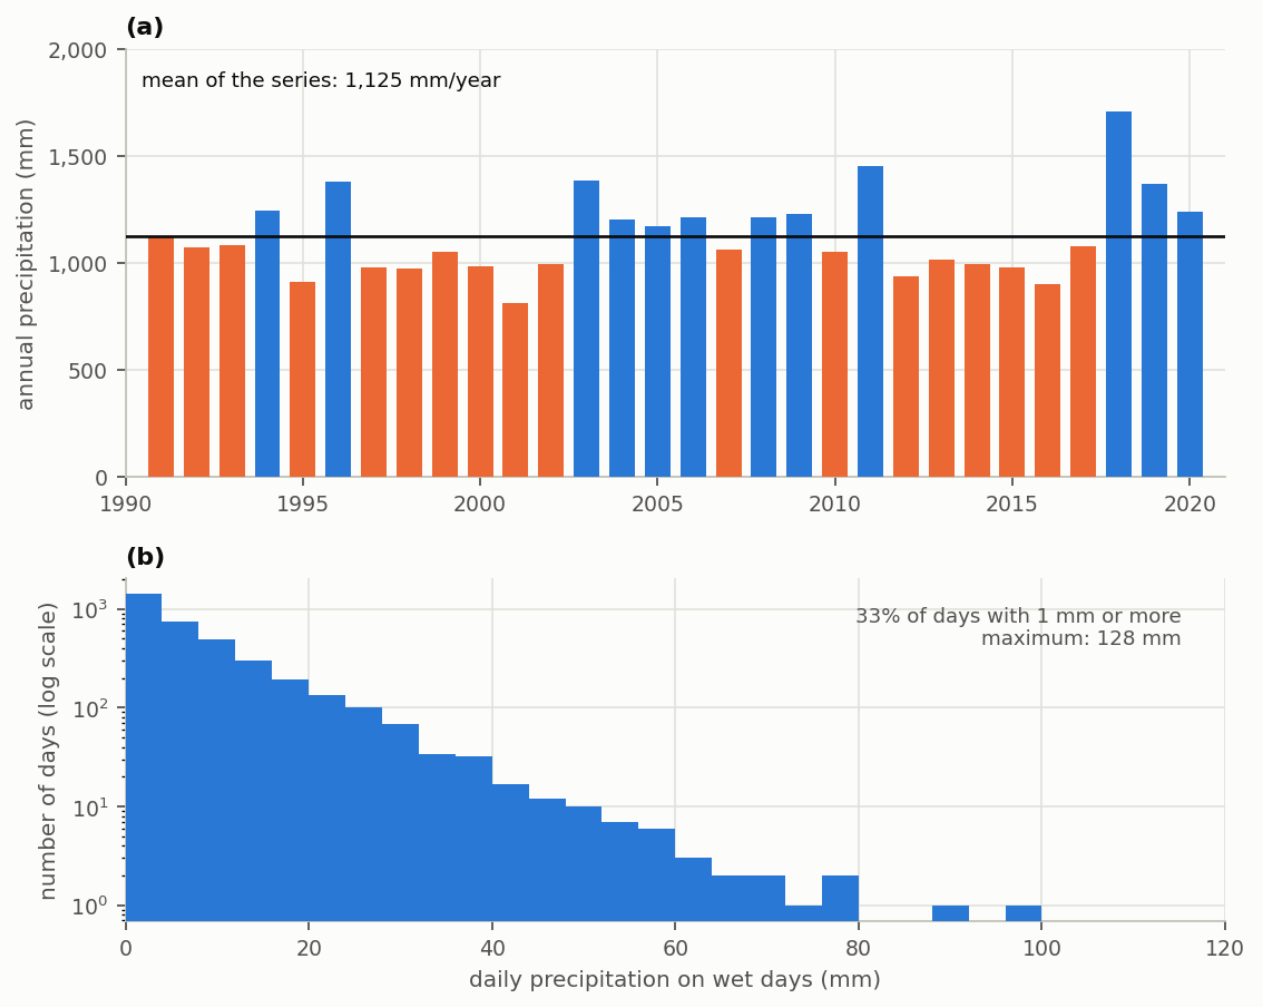


Figure 44 — New York precipitation series used throughout the tutorial (ERA5 reanalysis, 1991 to 2020): (a) total precipitation of each year, with the thirty-year mean as a solid line and the years above the mean in blue and below it in orange; (b) frequency distribution of daily precipitation on wet days, on a logarithmic scale, which shows how few days account for the largest volumes.

4.1.3. The catchment area

The tutorial project adopts a catchment area of 150 m^2, and this is the first field where people often go wrong.

The catchment area is the **horizontal projection** of the roof, not the sloping area of the roof. A roof with a 30% slope over a 150 m^2 plan has about 157 m^2 of tiled surface, and still collects the same 150 m^2 of rain: precipitation falls vertically, and what it meets is the shadow of the roof projected on the ground. Most rainwater guidance defines it so: the horizontally projected area of the impermeable roof surface where the water is collected. It is this area `A` that enters the availability equation.

> **Catchment area is not contributing area.** Gutter and downpipe design standards use another area, for another purpose. To size the drainage by the peak flow of a short, intense storm, they add to the projection the increments due to the roof slope and to the walls that intercept wind-driven rain. That area overestimates the volume the roof collects over the year. In Triton, enter the horizontal projection; the contributing area belongs to the gutter design, which the program does not do.

> **Warning.** Using the sloping area overestimates the collection by the ratio `1/cos(slope)`. On a 30% roof it gives 4.4% more water that does not exist. On steeper roofs the error grows quickly.

Once the series is loaded, the program already shows the regime it describes. It is worth checking this drawing before going on: a series from the wrong city, or with the wrong unit, usually shows up in the seasonal cycle of Figure 45 before it shows up in any result.

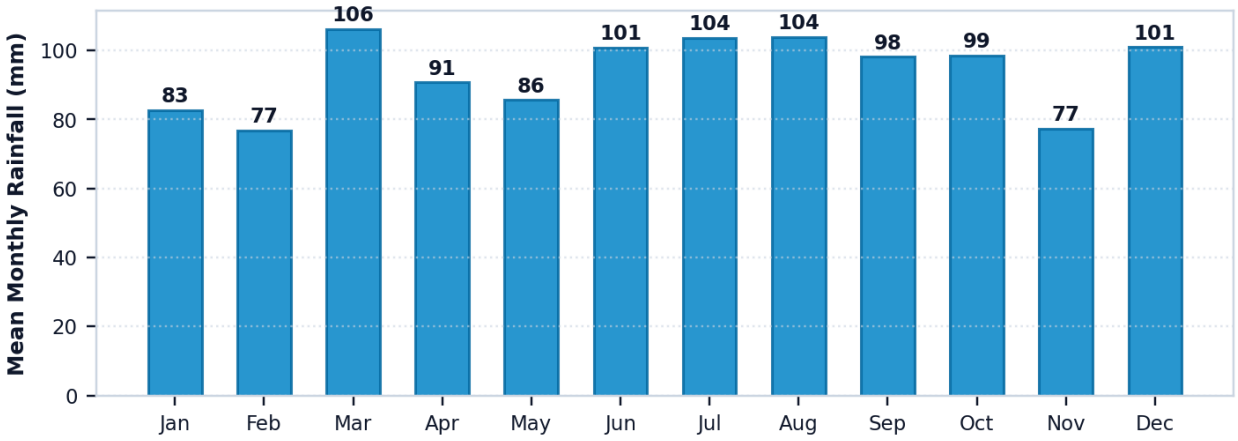


Figure 45 — The mean seasonal cycle of the series, calculated and drawn by the program as soon as the precipitation is loaded. In New York the wettest month receives about 1.4 times what the driest month receives, a mild cycle that the tank gets through easily. Figure generated by the program itself.

4.1.4. The runoff coefficient

The tutorial types 0.85 in the coefficient field. The program, in turn, opens with ceramic tiles selected and applies 0.75, the value the list of materials gives them, which is also the value it assumes when no material is entered. Take care when reproducing the tutorial: to get the numbers of this manual, choose «Other / Custom» and type 0.85.

The origin of 0.85 deserves precision, because it is often quoted as a runoff coefficient and it is not quite one. Rainwater guidance commonly writes the available volume as the product of the precipitation, the area, a surface runoff coefficient and an efficiency of the collection system (filter and diversion), and 0.85 is a round figure sometimes suggested for that efficiency in the absence of manufacturer data. That efficiency already

accounts for the diversion of the initial runoff. Triton has a single field for the fraction of the rain that reaches the cistern and models the first flush separately, in millimetres. Typing a combined figure there and also applying the 2 mm first flush counts the loss of the initial runoff twice, so the tutorial is conservative. In a study, declare the value adopted in the field, its origin and the first flush, and do not attribute to a standard a runoff coefficient it does not set.

The surface runoff coefficient represents the fraction of the incident rain that actually reaches the cistern, and the difference to one corresponds to what is lost on the way. The losses have four origins: absorption by the roof material, evaporation on the heated surface, splashing out of the gutter and the initial wetting of the tiles at each new rain event. Figure 46 shows the coefficient the program gives to each roof material.

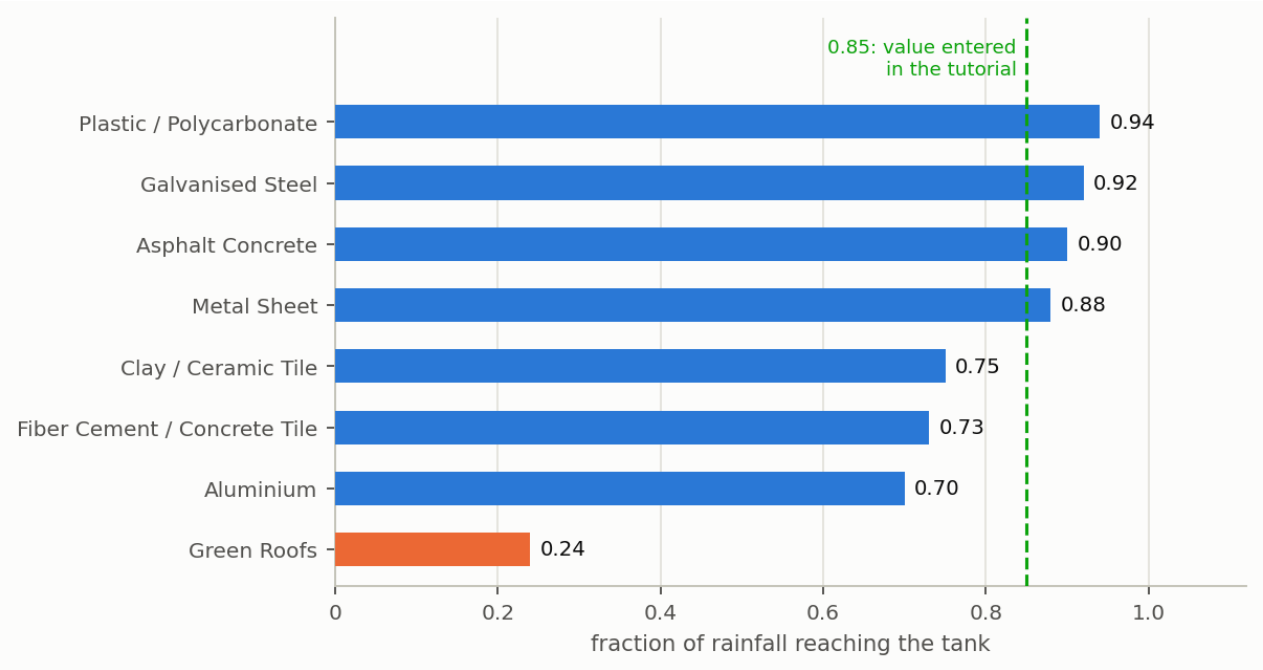


Figure 46 — The runoff coefficient the program gives to each roof material, with the values the program uses. The dashed line marks 0.85, the collection factor adopted in the tutorial. The green roof is the only one that departs from the group, because it retains part of the rain in the substrate.

The program accepts any value between zero and one, and refuses values outside that interval naming the field — a coefficient larger than one would mean that the roof delivers more water than the rain brings it. Step **11. Documentation** has the same table, with the source of the values. For a mixed roof, the coefficient to type is the mean of the coefficients of each material weighted by their areas.

4.1.5. The first flush

The tutorial diverts 2.0 mm on every rain event.

The first water that washes the roof carries dust, leaves, bird droppings and everything else that has settled since the previous rain. Diverting it, instead of leading it to the cistern, is the cheapest and most effective quality measure a rainwater system has, and that is why it is practically universal in well-run projects. The tutorial adopts 2 mm, a round value for when there is no local data to justify another; in a study, justify the depth you adopt.

The program offers three ways of applying the first flush, which correspond to three types of self-cleaning device.

Table 97 — The three ways of applying the first flush

Mode	When it diverts	When to use
1	on every rain event	the default, and the most conservative
2	only on the first event after a dry spell	a device that does not empty by itself between close rains
3	every X days	a device with scheduled emptying

> **Warning, and this is the point that surprises the most.** When the first flush applies and the day's rain **does not exceed** the depth, the **whole** day is lost, not the difference. A day of 1.6 mm with a 2.0 mm first flush collects **zero**.
>
> In the New York series this affects 17% of the days. In climates with more frequent drizzle the share is larger.

The reason for this behaviour is physical, not conventional: the self-cleaning device has to fill completely before any water goes on to the cistern. When the day's rain is not enough to fill it, nothing passes, and the retained volume is lost to the drainage together with the dirt it washed.

> **The depth is not the device.** `d_f` is a depth in millimetres. The hydraulic volume of the self-cleaning chamber is `A × d_f`, which in our project gives 150 × 2 = **300 litres**. Step **3. Quality & Treatment** sizes and prices that chamber (section 2.5), and section 4.7 shows its cost in the investment.

4.1.6. What we have so far

Table 98 — State of the tutorial project at the end of defining the rain and the catchment

Item	Value
series	New York, 30 years
catchment area	150 m²
runoff coefficient	0.85
first-flush depth	2.0 mm, every event

With this the program already knows **how much water comes in**. It remains to say how much goes out, which is section 4.2.

A back-of-the-envelope calculation, to calibrate the expectation: 1,125 mm per year on 150 m^2 at a coefficient of 0.85 gives about 143 m^3 per year of raw water, before the first flush. Section 4.3 shows how much of that volume turns into an actual saving — and the difference between the two numbers is the most important lesson of the tutorial.

4.2. The building and the demand

> By the end of this section the program will know **how much water goes out** and, more importantly, **which part of it rain can supply**. That fraction is the ceiling of everything that follows.

Section 4.1 defined the supply. This one defines the demand. And there is an asymmetry worth understanding from the start: **rain cannot supply all the demand**, however much water there is. There is a ceiling, it is defined here, and no tank goes beyond it.

4.2.1. The building type

In step **2. Building & Demand**, choose *Single-family residential*. The program has eight building types, each with its reference per capita consumption (Figure 47) and the usual split of end uses. Industry has no reference range, because consumption depends on the production process, not on occupancy: in that case, the value must come from measurement.

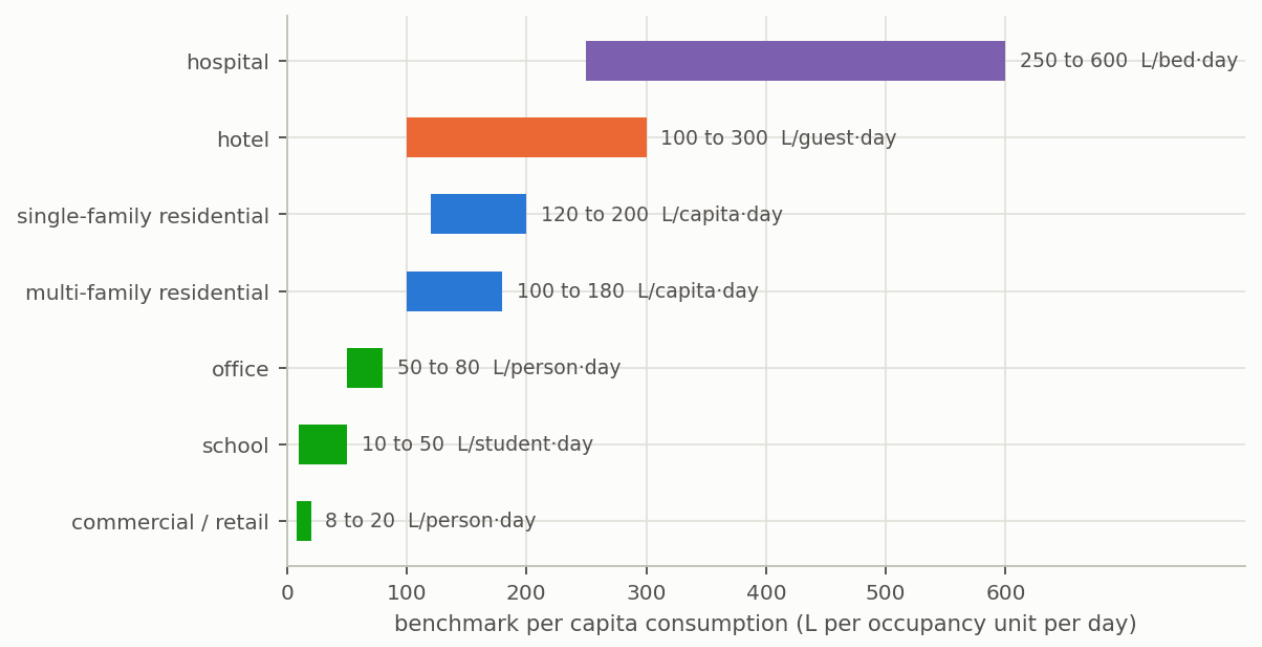


Figure 47 — The usual ranges of per capita consumption by building type. The width of each range is large on purpose: they are reference values for those who have not yet measured, and measurement, when it exists, always prevails.

The building type is a starting point, not an imposition: the value remains editable. Section 3.5 deals with non-residential cases, which have a trap of their own in the tariff.

4.2.2. The residents and the consumption

Four residents, 150 L/person·day. A total of **600 L/day**.

The value of 150 L/person·day is a round reference for a house with a regular supply, not a measurement. If you have the building's water and sewage bill, use it: divide the monthly consumption in litres by thirty and by the number of residents. The measured number is worth more than any reference.

The program accepts a **constant** demand or one modulated by week, month or day. The tutorial uses a constant one; section 3.4 shows the modulation, which matters in schools, hotels and any building with seasonality.

4.2.3. The fraction rain can supply

28%. It is the most important number in this section.

Rainwater does not go to the shower, the kitchen sink or for drinking. In a house, it goes to the toilet, floor washing, garden watering and vehicle washing. The share of these uses in the total consumption is the **ceiling of the saving potential**.

The split adopted in the tutorial is shown in Figure 48, with the uses rain supplies marked. The toilet accounts for 20% of consumption and cleaning and watering for 8%; shower, kitchen sink, washbasin and washing machine, which account for the rest, stay on potable water.

Adding the two that rain supplies gives the 28% of the tutorial. It is a conservative value for a single-family house without a large garden, and it is conservative on purpose: it keeps to the uses that rainwater guidance most widely admits.

> **The washing machine is a choice that guidance does not settle.** National rainwater standards differ on laundry. Some list it among the permitted non-potable uses; others leave it out and ask the responsible professional to study the quality parameters and treatment for any use not listed. Use in the washing machine is common in the literature and in practice, and that is why many studies work with suppliable fractions larger than this tutorial's. The tutorial does **not** adopt it: the machine stays on potable water, and the suppliable fraction falls to the 28% of the toilet and the outdoor uses. A project that includes laundry must declare that choice and the quality criterion adopted for it, and check it against the standard that applies where the building stands.

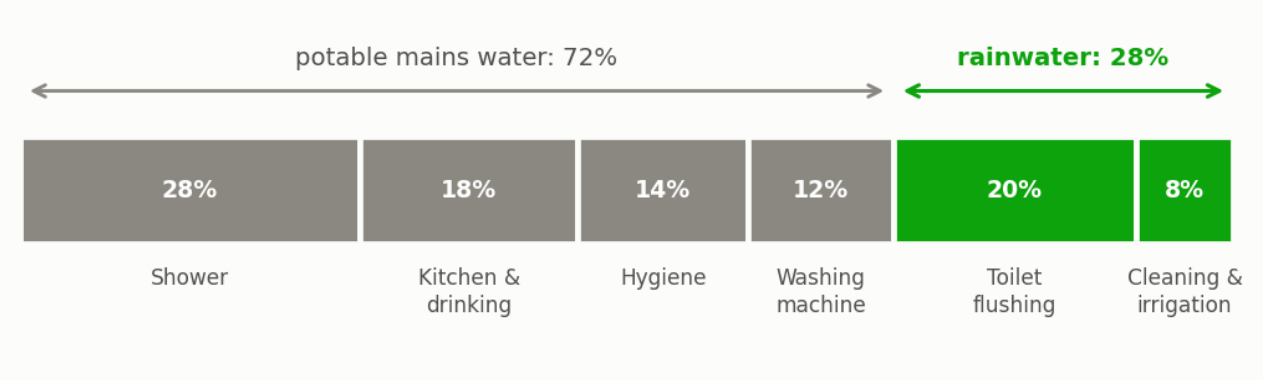


Figure 48 — Typical split of the consumption of a house by end use. In grey, the uses that require potable water; in green, those where rainwater can be used, whose sum is the suppliable fraction and the ceiling of the saving potential: no tank, however large, saves more than this fraction.

> **This number is the ceiling.** With a 28% suppliable fraction, the saving potential **never** exceeds 28%, however large the tank and however much it rains. The table of section 4.4 shows the curve approaching exactly this limit and never crossing it.
>
> Anyone who wants to go beyond 28% must change the **use**, not the tank: add a use, such as laundry, with a declared quality criterion, or reduce potable consumption.

4.2.3.1. Percentage on screen, fraction in the file

The same quantity appears in two forms, and each one has its place. In every field where you type — the fractions of the building screen, the weekly and monthly tables, the scenario tables, the batch spreadsheet and the `--share` argument of the command line — the fraction is a **percentage, from 0 to 100**: 28 means 28%. In the project file, in the parameter file and in `rainwater_share` and `non_potable_indoor_share`, it is a **fraction, from 0 to 1**: 0.28.

The split is not arbitrary. The percentage is the form in which the quantity circulates among designers, standards and water bills, and it is the form least prone to typing errors. The fraction is the form in which it enters the balance equation, multiplying the indoor demand (section 2.1), and it is the form that needs no conversion for anyone reading the file with another program.

What is not allowed is mixing them. Up to this version, twelve places in the program accepted both forms and decided by the rule «above 1 is a percentage». The rule fails precisely on small values, where the error cannot be seen: 1 became 100%, not 1%; 0.5 typed in a percentage column became 50%. Now the unit is fixed by the place, and never guessed from the value. A percentage above 100 is refused; a fraction above 1 is refused with the remark that it looks like a percentage. Figure 49 shows the three states of the field in the interface.

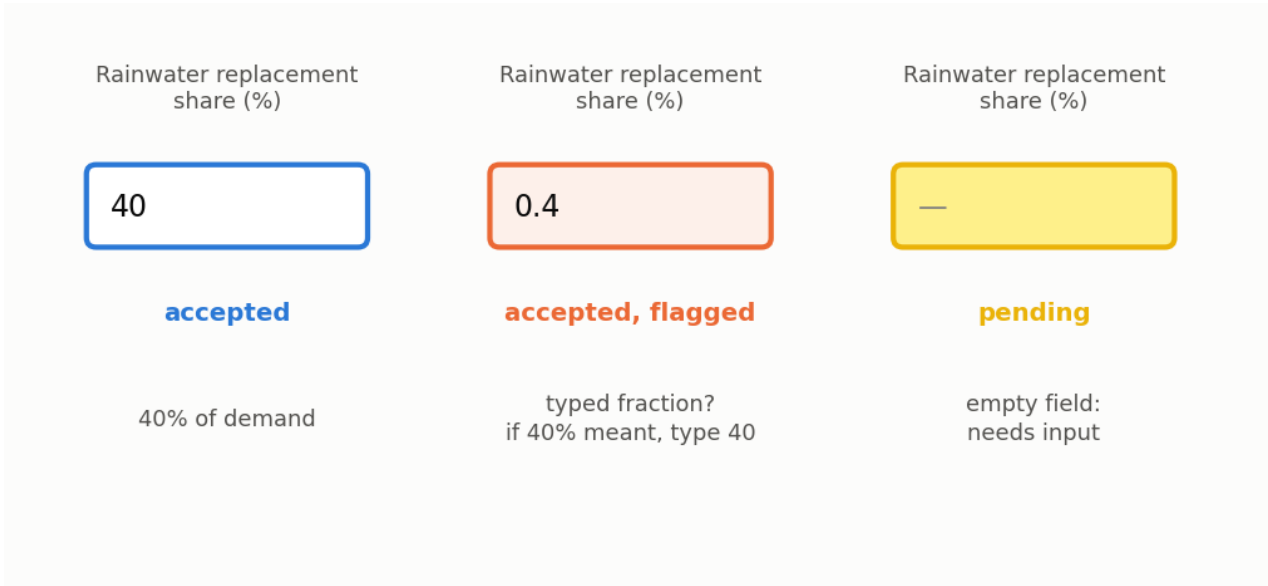


Figure 49 — States of the suppliable-fraction field in the interface. The field receives a percentage from 0 to 100; in the project file and in the calculation parameters the quantity is stored as a fraction from 0 to 1. A value between 0 and 1 typed in the field is flagged in orange, without blocking the calculation, because 0.4% is possible, although rare.

> **The orange marker.** A value between 0 and 1 in a percentage field is accepted, because less than 1% replacement is possible, but the field turns orange and the tip explains what was understood. In the scenario tables and the batch spreadsheet, the program asks before simulating.

4.2.4. Breaking down the uses, or not

The program accepts two levels of detail in the description of the demand, and the choice between them depends on what the study intends to answer.

In the **simplified mode**, two things are entered: the non-potable fraction of indoor consumption — toilets and laundry — and, if there is one, the outdoor demand in litres per day. The **total** suppliable fraction comes from the two,

```
f = (indoor fraction × indoor demand + outdoor demand) ÷ (indoor demand + outdoor demand)
```

and appears in a field that cannot be edited, because it is a result and not an input. Without outdoor demand, the total is the indoor fraction itself: the 28% of this tutorial. It is the mode adopted here and it is enough for most studies.

> **Why the total is not typed.** In the earlier development builds the total-fraction field was editable, but the simulation used the indoor fraction; and, when a project was opened, the screen reset the indoor fraction to 35% and the outdoor one to zero, whatever had been saved. A project that declared 28% was simulated with 35%. Today the screen restores both, the total is calculated, and an old file whose fractions disagree is opened with the total it declares, with a warning.

In the **detailed mode**, the demand is split into three parts: the indoor potable, which rain never supplies; the indoor non-potable, which is the system's priority; and irrigation, supplied last. The split changes two things. It changes the order of supply on days of scarcity, when indoor use takes precedence over the garden; and it makes it possible to distinguish indoor from outdoor use in certification credits, a distinction LEED requires in separate credits, as section 2.9 describes.

It is worth breaking down the uses when there is a garden of significant area, when certification is on the project's horizon, or when irrigation can be suppressed on rainy days — a situation the next item deals with.

4.2.5. Irrigation and suppression by rain

Once an irrigation volume is declared, the program offers a rain suppression threshold: on days when the precipitation exceeds that threshold, the garden is not watered. The behaviour reproduces that of any irrigation controller with a rain sensor, a common and cheap piece of equipment, and ignoring it would overestimate the outdoor demand over the whole year. The default threshold is 2 mm per day.

> **The rainfall series is read twice.** One reading is converted into collected volume, after the first flush. The other decides whether the garden is watered. The two are independent: a day can suppress irrigation **and** yield collection.

One choice remains that deserves particular attention, because it changes the economic result and is not neutral: the **backup supply** of irrigation. With it on, the mains waters the garden on the dry days when the cistern cannot cope, and that volume enters the water and sewage bill as potable consumption. With it off, the garden is simply not watered on that day, the building does not buy that water, and the corresponding volume appears in the balance as *unmet demand* — the third part dealt with in section 2.1.

The distinction between the two settings is conceptual before it is numerical. A garden that must be watered every day represents a real demand, which someone will pay for; a garden that accepts not being watered on a dry day represents a convenience, and treating it as demand inflates both the consumption and the apparent saving of the system.

4.2.6. What we have so far

Table 99 — State of the tutorial project at the end of defining the demand

Item	Value
building type	single-family residential
residents	4
per capita consumption	150 L/person·day
total demand	600 L/day
fraction suppliable by rain	28%
rainwater demand	**168 L/day**

The program now knows the supply and the demand. Before simulating, a comparison worth keeping:

Table 100 — Comparison between the annual rainwater supply and the suppliable demand

	m³/year
gross rainwater supply (precipitation × area × coefficient)	143
rainwater demand of the year	**61**

Supply exceeds demand: the gross volume is **2.3 times** what is intended to be used, before the first flush is deducted. If supply were the only limit, the system would meet 100% of the rainwater demand and reach the 28% ceiling.

It does not, and section 4.3 shows why.

4.3. The first simulation

> By the end of this section you will have the first result on screen and will know how to **read** the four numbers that matter. Reading is the hard part: the program delivers many numbers, and three of them answer different questions.

One input is missing before simulating: the volume of the tank. Let us guess.

3,000 litres. A 3 m^3 cistern is a common back-yard size, and what a designer would propose without much thought. Section 4.4 will ask whether it is the right volume. Here we only want to see the program run.

In step **4. Tank & Costs**, choose a fixed volume, enter 3,000 L, leave the upper tank unticked, and run.

4.3.1. The result

Table 101 — Result of the first tutorial simulation, with a 3,000 L tank

Result with 3,000 L	Value
potable water saving potential	**25.99%**
rainwater consumed	155.9 L/day
mains water consumed	444.1 L/day
water overflowed	150.8 L/day
days of full supply	91.9%
days of partial supply	1.7%
days of no supply	6.4%
intended rainwater demand	168 L/day
annual volume saved	57.0 m^3/year

The screen returns several dozen values, and four of them are enough to judge the project at this stage. Each one answers a different question, and it is precisely because they answer different questions that they do not replace one another: a project can be good by the first and bad by the third, and reading them together is what avoids a hasty conclusion.

4.3.2. The saving potential: 25.99%

This indicator answers the question that motivates most projects: how much of the water and sewage bill stops being paid. It is the central value the program produces and the one that appears in the summary of any study, and it is the ratio between the rainwater consumed and the total demand of the building over the whole series, as in Equation 14.

The denominator deserves attention, because everything else follows from it: it is the **total** demand, not the rainwater demand. It is this choice that sets the ceiling of the indicator at 28%, which is the suppliable fraction defined in section 4.2, and not at one hundred per cent.

The system reached 25.99% against a ceiling of 28%, which means it delivers 93% of what it set out to deliver. The remaining 7% correspond to the days when the cistern did not have enough water to meet that day's rainwater demand.

> **Do not confuse the two percentages.** «A saving of 26%» and «93% of the rainwater demand met» describe the same system and are different numbers. Published studies sometimes swap one for the other. Declare which one you are using.

4.3.3. The overflow: 150.8 L/day

It answers: is the tank big enough?

About 151 litres per day, on average over the thirty years, overflow from the cistern and go to the drainage system. That is almost as much as the 168 L/day the system intends to consume, and the tank lets through nearly as much water as it uses.

It looks like an argument for enlarging the tank, and it is a weak one. The roof offers 2.3 times what the house intends to use (section 4.2), so a good part of that surplus would overflow from any cistern, however large. The overflow only says something about the volume when compared with that of other volumes, and that comparison is what section 4.4 does.

> A high overflow is not a defect of the program or of the project. It is the signature of the mismatch between the rain, which arrives concentrated in a few days, and the demand, which is constant. The tank exists to buffer this, and every finite tank fails in some event.

4.3.4. The days of supply: 91.9% full

It answers: how often can I count on the system?

This is the **time** reliability of the system, and it answers a question the saving potential does not reach: how often rainwater can be counted on. Each day of the simulation receives one of three classifications, according to the degree of supply achieved.

Table 102 — Classification of each day of the simulation by the degree of supply

Class	What it means
full	rain met **all** the rainwater demand of the day
partial	it met part of it, and the mains made up the rest
none	the cistern was empty; everything came from the mains

On 91.9% of the days the system met the rainwater demand on its own, and on the remaining 8.1% the mains came in, fully or partly (1.7% of the days partial, 6.4% none). The distinction has a direct consequence on the plumbing design: a system with many days of no supply needs a well-sized automatic backup supply, and the user notices the switching between the two sources over the year. A system with 99% full days is, in practice, independent of the mains for the uses it supplies.

> **Potential and reliability do not go together.** It is possible to have a high potential with low reliability: a tank that fills in the rainy season and dries out in the dry season delivers a lot of volume over the year and fails half the days. The table of section 4.4 shows the two columns diverging.

4.3.5. The annual volume saved

It answers: how much is this worth in money and in carbon?

This is the value that carries over to sections 4.7 and 4.8, because both the saving on the water and sewage bill and the avoided carbon emission are calculated from it. It is 57.0 m^3/year, less than half of the 143 m^3/year the roof makes available before the first flush; the first flush and the overflow account for most of the difference.

Before discussing why the potential does not reach 28%, it is worth seeing the tank at work. The results tab has the daily series of the cistern level, and it is there that the two regimes limiting the yield can be seen at once: overflow and shortage (Figure 50).

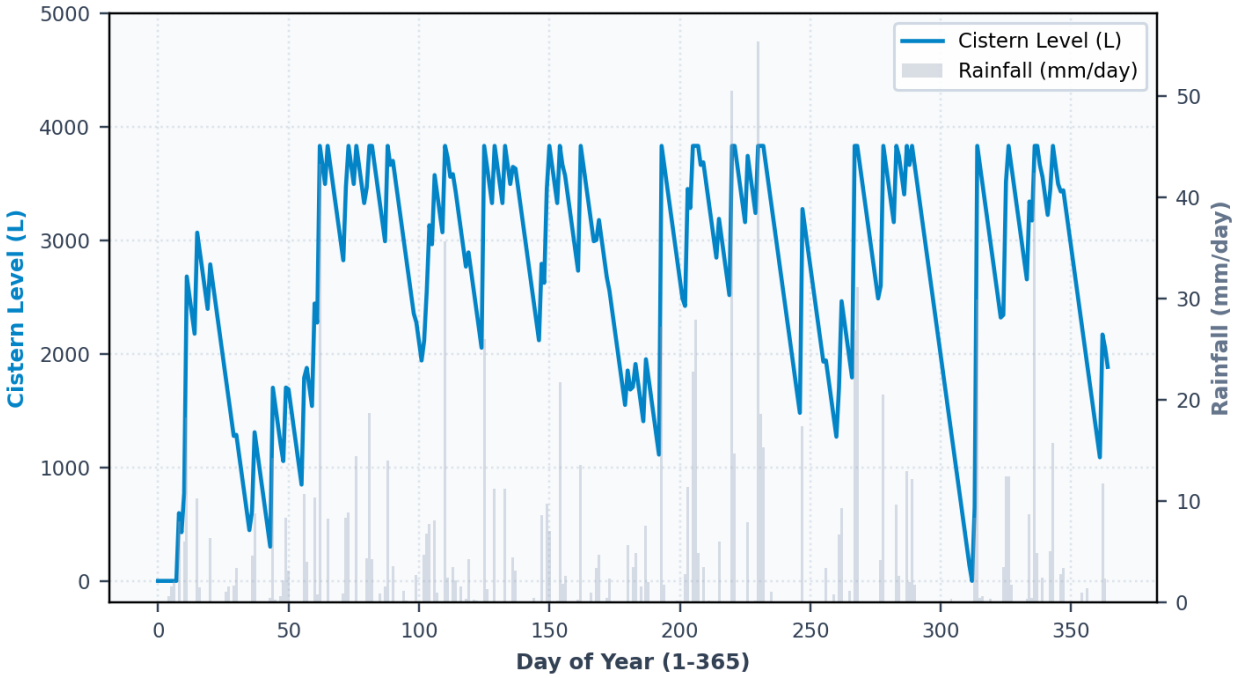


Figure 50 — The level of the cistern over the first year of the series, with the daily rain in the background. The plateaus at the top are the days when the tank is full and overflows; the valleys at zero are the days when it ran dry and the mains supplied everything. Figure generated by the program itself.

4.3.6. Why we do not reach 28%

Section 4.2 ended with an apparently favourable comparison: 143 m^3 per year of supply against 61 m^3 of rainwater demand, that is, 2.3 times what is needed. Faced with this surplus, it would be reasonable to expect full supply, and yet the system delivers 93% of what was intended.

The explanation lies entirely in **time**. The surplus does not occur when the water is needed: precipitation arrives concentrated, fills the 3,000 L cistern in a single day of intense rain, overflows on the same day, and is missing two weeks later. The annual surplus and the daily supply are quantities that do not communicate, and it is precisely this lack of communication that makes the daily simulation indispensable.

The 3,000 L tank stores the equivalent of eighteen days of rainwater demand. Any dry spell longer than that empties it, and from then on the system depends entirely on the mains until the next rain.

That is why enlarging the tank works — and that is why enlarging has a limit. Section 4.4 measures exactly where that limit lies.

4.3.7. What we have so far

Table 103 — State of the tutorial project after the first simulation

Result with 3,000 L	
saving potential	25.99%
out of a ceiling of	28%
overflow	150.8 L/day
days of full supply	91.9%

A defensible result, and already close to the ceiling. But we chose 3,000 L by guesswork: it may be too little, and it may be too much.

What would be right?

4.4. Choosing the volume

> By the end of this section you will have the tank's return curve, will know where it stops paying off, and will understand why there is **no** absolute optimal volume — there is an optimal volume for a declared criterion.

Section 4.3 took 3,000 L as a first guess and found 150.8 L/day overflowing, almost as much as the house intends to use, and a supply already close to the ceiling. The two readings pull in opposite directions, and the question that arises is how much tank is worth having. It cannot be answered by an isolated attempt: it is answered by simulating the same project for many volumes and watching how the result evolves. That is what the program calls a **sweep**.

4.4.1. Running the sweep

In step **4. Tank & Costs**, choose the sweep mode and enter the maximum volume and the step. For our project: a maximum of 20,000 L, a step of 1,000 L.

Two particularities of how the grid is built are worth knowing before interpreting the result. The first is that the step entered is rounded up to a multiple of 250 L, the commercial quantum of tanks — nobody buys a 1,300 L cistern, and an optimum pointing at that volume would be impracticable. When the step asked for is not a multiple of 250, the program adjusts it and records the adjustment, so that the report can declare the step actually used.

The second is that the grid is limited to forty positive volumes. A sweep from 0 to 50,000 L with a 100 L step would need five hundred simulations of thirty years each, and the gain in information does not make up for the computing time, because the curve is smooth and forty points describe it amply. The maximum volume entered is always kept as the last point of the grid, so only the last interval can be smaller than the effective step.

Zero volume is part of the grid as the reference alternative: it represents the no-system scenario, against which all the others are compared.

4.4.2. The curve

Table 104 — Volume sweep of the tutorial project, with the marginal gain of each added cubic metre

Volume	Potential	Gain over the previous	Gain per cubic metre added	Overflow	Full-supply days
L	%	percentage points	%/m³	L/day	%
0	0.00	—	—	307	0.0
1,000	19.14	19.14	19.14	192	62.2
2,000	24.24	5.10	5.10	161	84.4
3,000	25.99	1.75	1.75	151	91.9
4,000	26.83	0.84	0.84	146	95.3
5,000	27.24	0.41	0.41	143	97.0
6,000	27.49	0.24	0.24	142	97.9
8,000	27.74	0.26	0.13	140	98.9
10,000	27.86	0.12	0.06	139	99.5
12,000	27.94	0.08	0.04	138	99.8
16,000	27.98	0.04	0.01	138	99.9
20,000	27.98	0.00	0.00	137	99.9

Figure 51 plots the results of the table: the saving potential converges to the suppliable fraction, and the marginal gain falls by three orders of magnitude across the sweep.

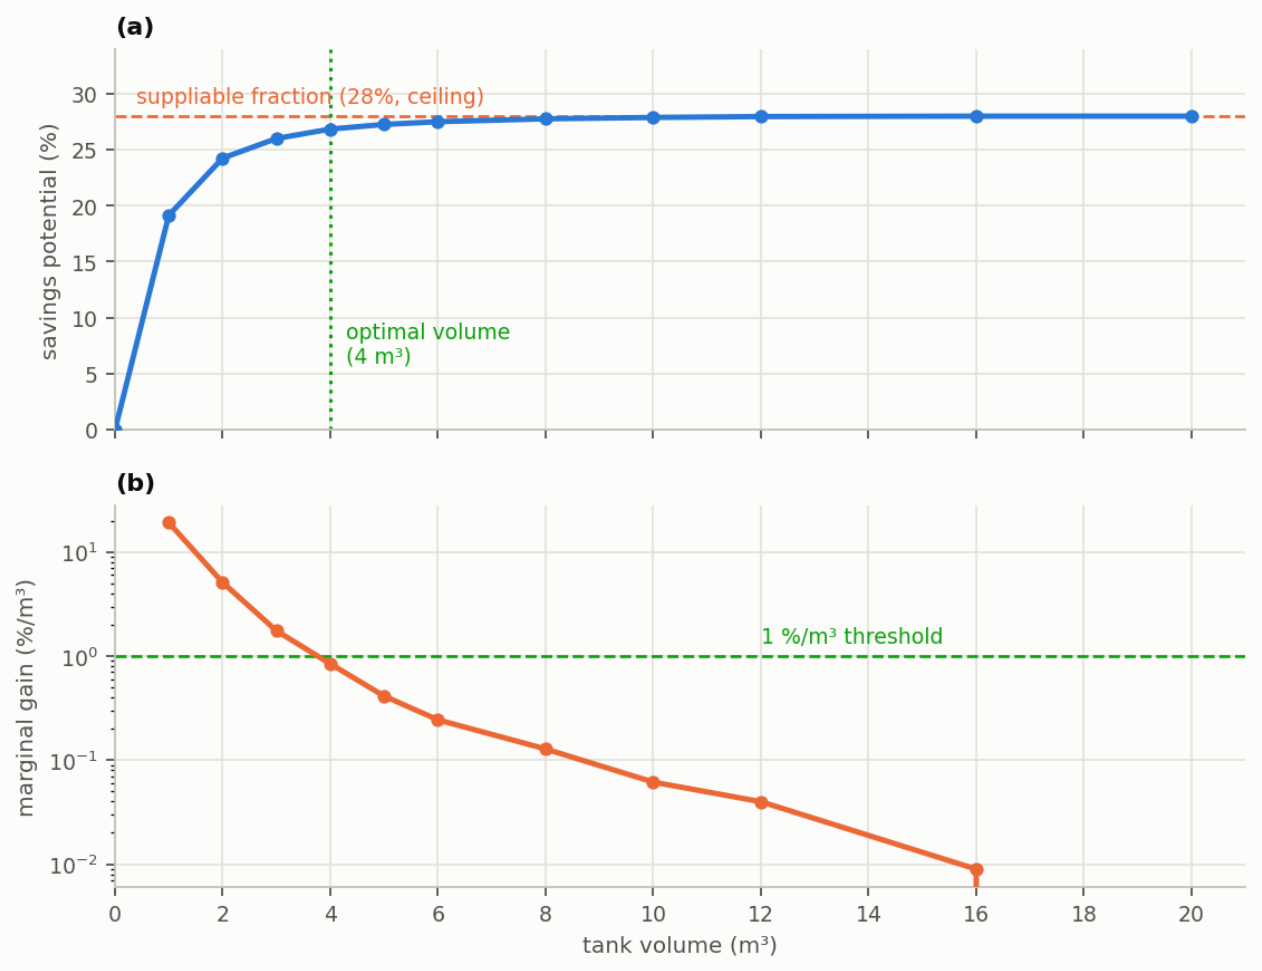


Figure 51 — (a) Saving potential as a function of the tank volume, approaching the 28% ceiling without crossing it, with the ideal volume marked; (b) marginal gain, on a logarithmic scale, with the 1 %/m³ threshold adopted in the tutorial.

The decisive column of the table is the **gain per added cubic metre**, which is the discrete derivative of the potential curve and expresses how much saving each extra cubic metre of tank adds. The table below highlights a few intervals, and the pattern it reveals is the central argument of this section.

Table 105 — Marginal saving gain for each cubic metre added to the tank

From → to	Gain per m³
0 → 1,000 L	19.14 %/m³
1,000 → 2,000 L	5.10 %/m³
2,000 → 3,000 L	1.75 %/m³
3,000 → 4,000 L	0.84 %/m³
4,000 → 5,000 L	0.41 %/m³
10,000 → 12,000 L	0.04 %/m³
16,000 → 20,000 L	0.00 %/m³

The first cubic metre of tank delivers 19 percentage points of saving; those from 10 to 12 m³ deliver four hundredths of a point each, and those from 16 to 20 m³, nothing. The difference is more than two orders of magnitude, and the cubic metres cost the same concrete, the same excavation and the same labour. From 12 m³ on, 99.8% of the days are fully supplied, and no further volume has much to add.

This behaviour is not a peculiarity of the New York rainfall regime. It is the characteristic shape of every rainwater harvesting curve, and it follows from two facts acting together. The first litres of storage capture

the small, frequent events, which make up most of the rains in any regime; and the ceiling imposed by the suppliable fraction, 28% in this project, pulls the curve towards the horizontal as the system approaches it, so that the room left for gain runs out.

4.4.2.1. The four charts the screen shows

The sweep does not return only the potential curve. The results tab has four charts that answer different questions about the same set of simulations, reproduced below with the data of this tutorial: the saving potential (Figure 52), the marginal gain (Figure 53), the overflowed and consumed volumes (Figure 54) and the classification of the days (Figure 55).

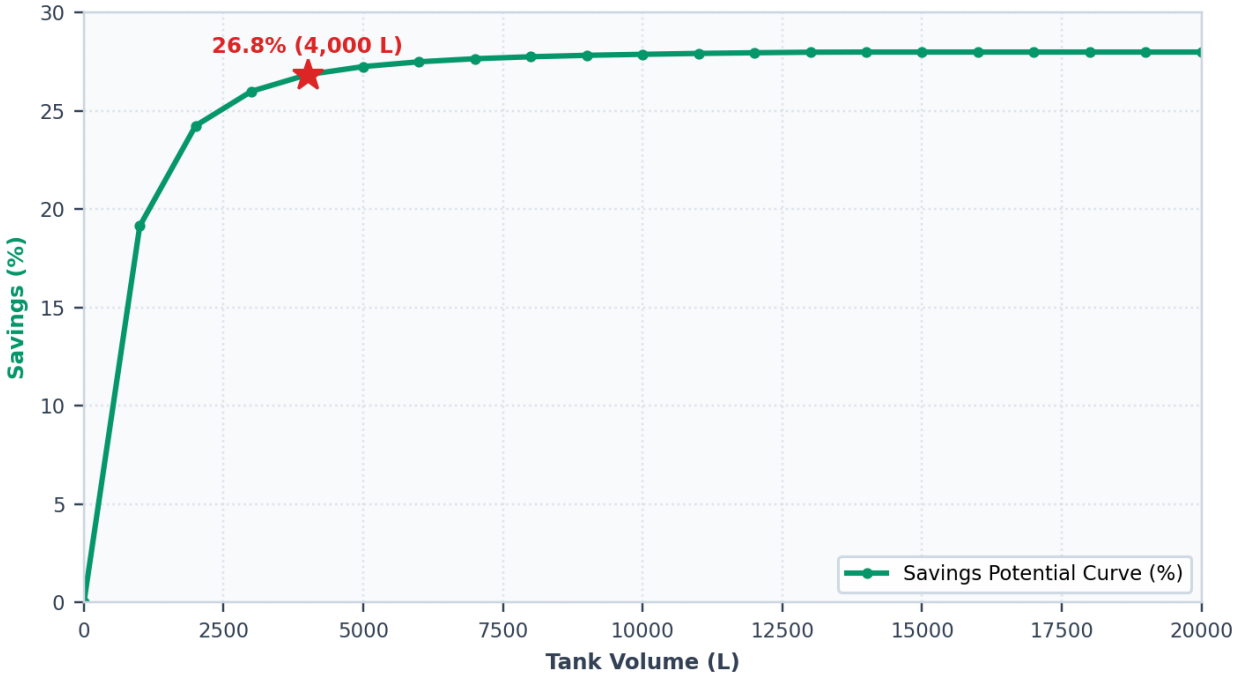


Figure 52 — The first chart of the results tab: the potable water saving potential as a function of the lower tank volume. The star marks the selected volume. Figure generated by the program itself, with the tutorial data.

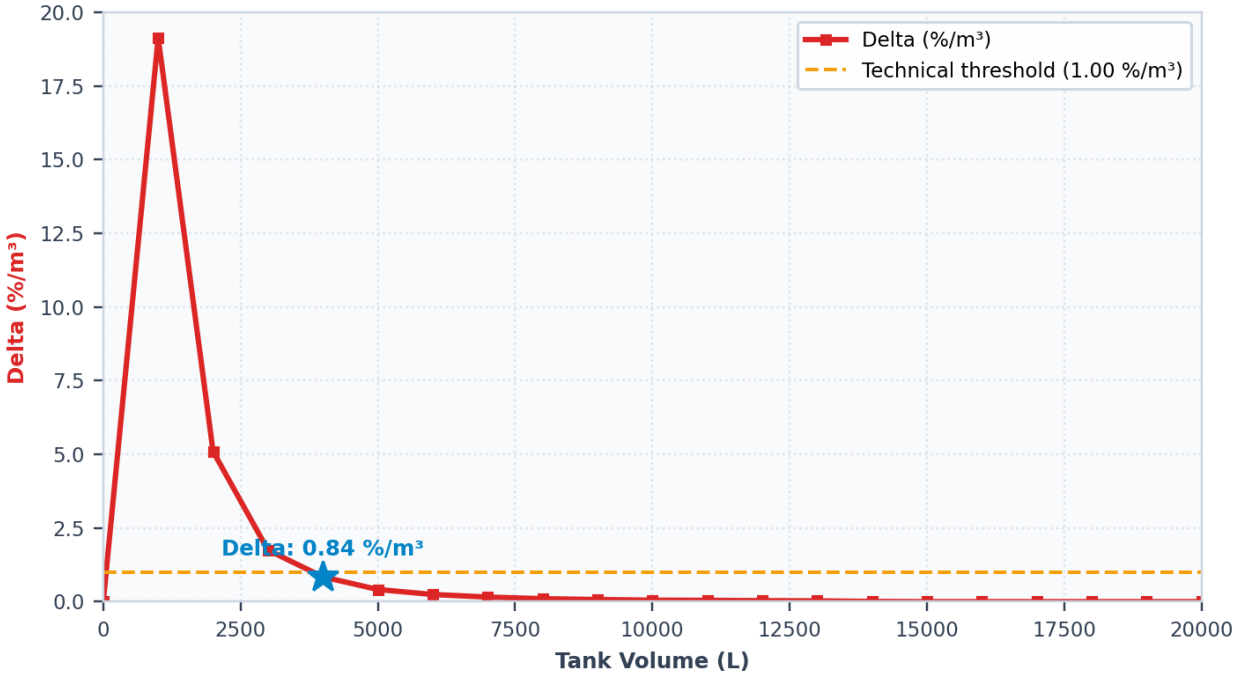


Figure 53 — The second chart: the marginal gain, in percentage points per added cubic metre. It is the derivative of the previous curve, and it is on it that the ideal-volume criterion operates. Figure generated by the program itself.

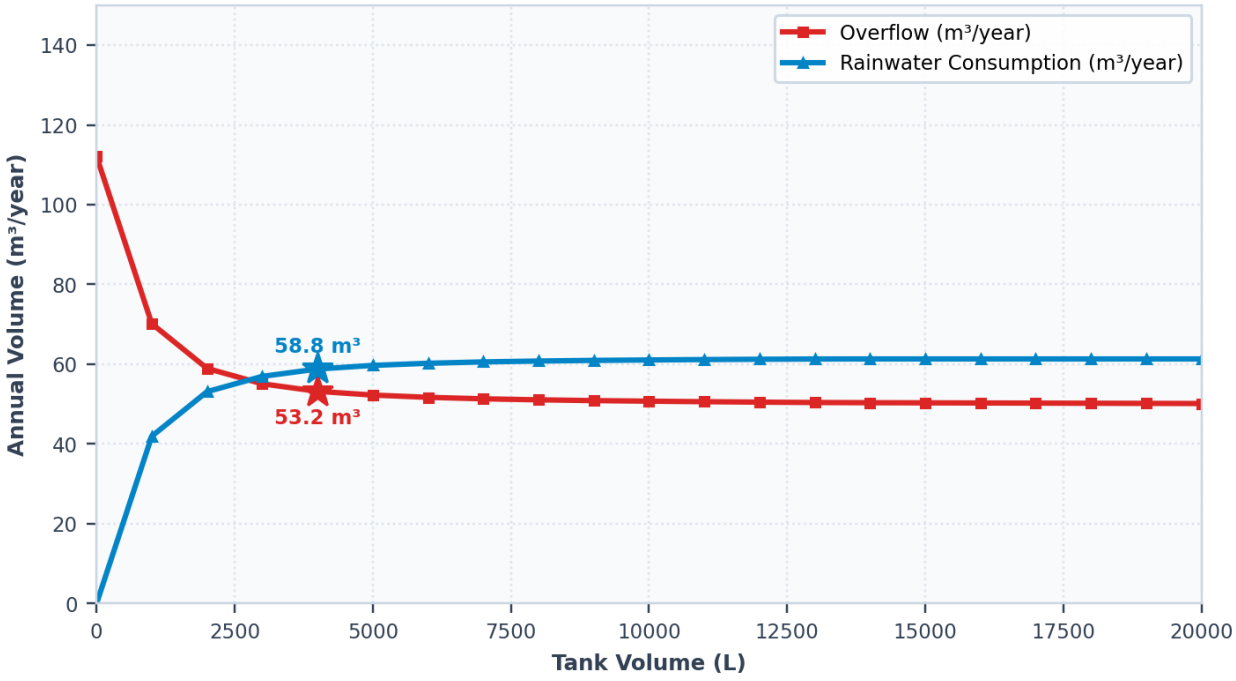


Figure 54 — The third chart: the overflowed volume and the rainwater volume consumed, both annual, on the same scale. The two curves explain each other, because all the water that stops overflowing becomes consumed. Figure generated by the program itself.

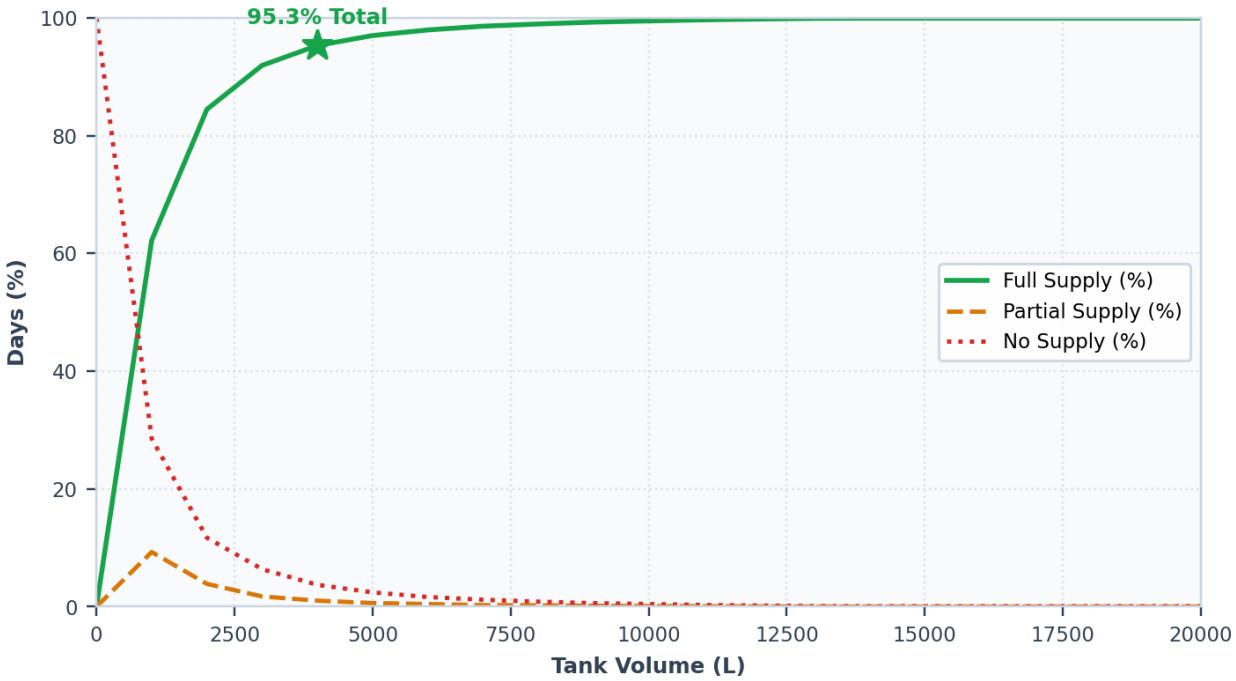


Figure 55 — The fourth chart: the split of the days of the period into fully supplied, partly supplied and not supplied. It is the time reading of the same sweep, and the only one that answers how often the system can be counted on. Figure generated by the program itself.

4.4.3. The ideal volume

Faced with a curve whose yield falls off in this way, the question «what is the ideal volume?» only admits an answer once it is established what no longer paying off means. Triton uses the marginal-gain criterion for this: the ideal volume is the smallest volume whose gain per added cubic metre has already fallen below a threshold declared by the user, as formulated in section 2.2.

The program opens with a threshold of 5 %/m³, and the tutorial adopts a stricter one, of 1 %/m³. The difference is not a detail: with the default, the ideal volume of this project would be 3,000 L; with the tutorial's threshold, the first volume to fall below it is 4,000 L, with a marginal gain of 0.84 %/m³. Anyone redoing the tutorial must therefore change the threshold in the program before running the sweep.

Table 106 — Indicators of the ideal volume obtained with the 1 %/m³ threshold adopted in the tutorial

Indicator	Value
ideal volume, 1 %/m³ threshold	4,000 L
potential at that volume	26.83%
out of a ceiling of	28%
days of full supply	95.3%

The threshold, however, is the analyst's choice, and it decides the result as much as the input data. The table below shows the ideal volume each plausible threshold would produce for this same project.

Table 107 — Ideal volume obtained with each marginal-gain threshold, for the same project

Declared threshold	Ideal volume	Potential
3.0 %/m³	3,000 L	25.99%
1.0 %/m³	4,000 L	26.83%
0.5 %/m³	5,000 L	27.24%

Table 108 — Cost and performance compared between the ideal volume and the largest volume swept (prices are illustrative, not market prices)

	4,000 L	20,000 L
saving potential	26.83%	27.98%
concrete cistern price (illustrative, not a market price)	US$ 2,200	US$ 8,600
mass of concrete	4,800 kg	24,000 kg
embodied carbon of the system	858 kg CO_2e	3,546 kg CO_2e
price ratio		**3.9×**
potential gain		**+1.15 points**

The program gives no opinion on which threshold would be right, and it could not: the choice depends on the cost of the tank, the value of water at the site and the space available on the plot, none of which is hydrological data. What the program does is apply the declared threshold faithfully and record it in the report.

> **In a published study, declare the threshold.** Two papers with an «ideal volume» from different thresholds are not comparable. Between the thresholds of the table, the difference is 2,000 L of tank, and it buys 1.25 percentage points of saving.

4.4.4. Why the marginal-gain criterion is not enough

The marginal-gain criterion is purely hydraulic: it looks at the yield curve and nothing else. It does not know how much the tank costs, how much a cubic metre of water is worth at the site in question or how much carbon the chosen material carries with it. Three consequences follow from this blindness, and each one can move the recommendation in a different direction.

- If water is very expensive, the gain of 0.41 %/m³ of the fifth cubic metre may pay for itself well, and the economic volume will be **larger** than the hydraulic one.
- If the cistern is expensive or space is scarce, the opposite.
- A 20 m³ concrete cistern weighs twenty-four tonnes and carries, with the rest of the system, about **3.5 tonnes of embodied CO_2e**, against less than one tonne for the 4 m³ one. The last cubic metre adds no saving at all, and has no way of offsetting the difference.

Three criteria and three different answers to the same question, and none of them is more legitimate than the others in the abstract. That is why the tutorial does not end here: sections 4.7 and 4.8 add money and carbon to the analysis, and section 4.9 puts four dimensions — technical, economic, environmental and structural — on the same table, with declared weights, to see which volume each declared priority favours.

> **The most common mistake, and it is in section 5.1.** Publishing the volume with the largest water saving as if it were the recommended volume. According to the table, 20,000 L gives the largest potential, 27.98%, the same as 16,000 L already gave. It also costs **3.9 times more** than 4,000 L (illustrative prices, not market prices), and carries **4.1 times more embodied carbon**, to deliver 1.15 percentage points more.

The sweep has one more reading that the table does not show: how much of the capacity the consumption actually uses. Measuring the tank by its level is misleading, because a large cistern always looks full precisely because it stores water the demand never gets to withdraw. Figure 56 measures the capacity by consumption, in two ways. The first is the **stored autonomy**, the volume at the end of each day divided by the daily rainwater demand of 168 L, shown as a duration curve. The second is the number of **turnovers per year**, the ratio between the annual rainwater consumption and the capacity, which says how many times the volume of the cistern is actually consumed and replenished.

The 2 m^3 cistern turns its volume over many times a year and often ends the day empty: the capacity is fully used, and water runs short. The 4 m^3 one turns over fewer times and empties on far fewer days. The 20 m^3 one turns over only a few times a year and almost never empties, but on most days it holds many weeks of demand, far beyond the dry spell the series records. That reserve the consumption never mobilises is what the additional investment buys, and it is the physical reading of the diminishing returns of the potential curve.

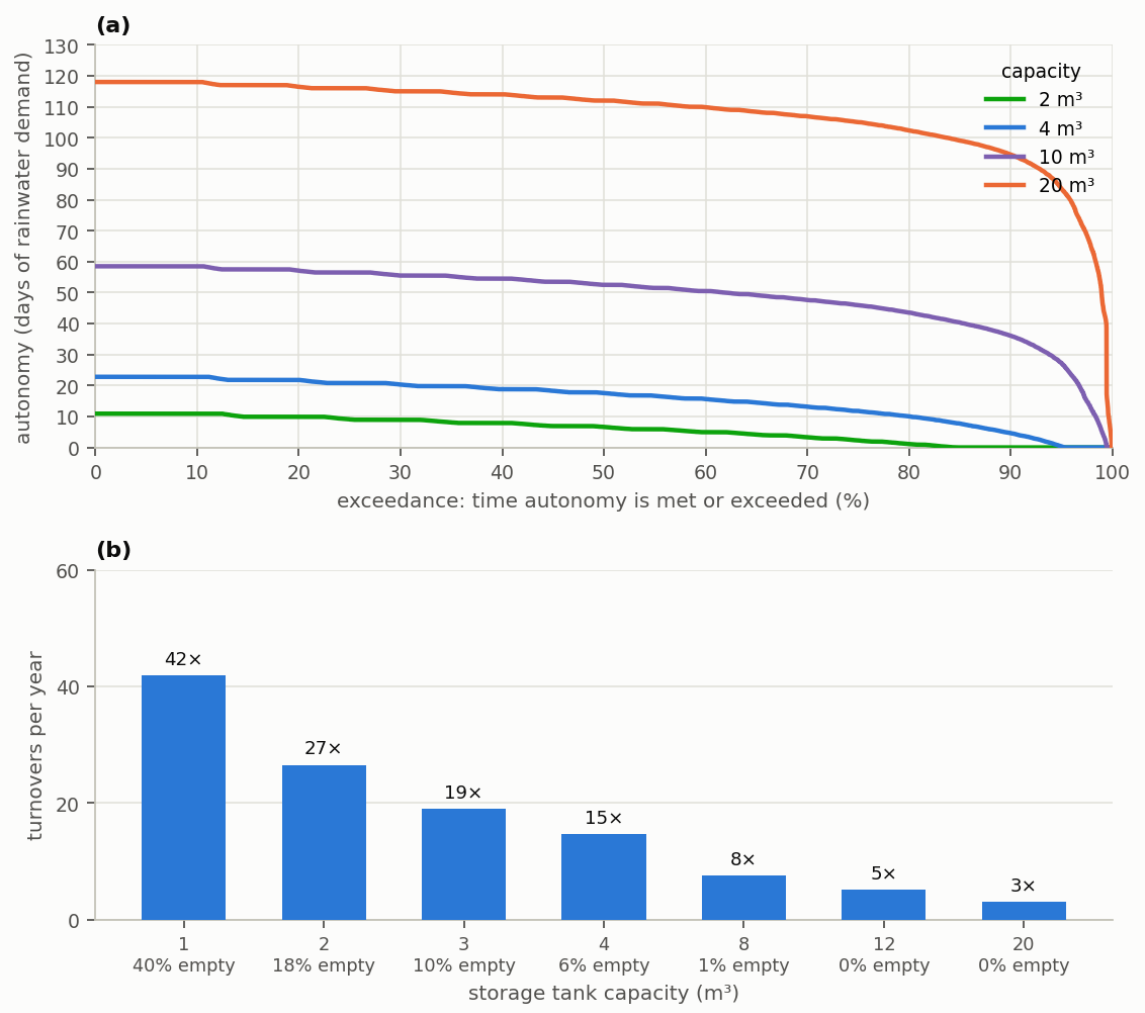


Figure 56 — Use of the lower tank capacity in the tutorial project, with a rainwater demand of 168 L/day: (a) duration curves of the stored autonomy at the end of each day, in days of rainwater demand, for 2, 4, 10 and 20 m^3; (b) annual turnovers of the volume, given by the ratio between the annual rainwater consumption and the capacity, with the fraction of days on which the tank ends empty (up to 5% of the capacity) shown under each volume.

4.4.5. Two more readings of the table

The overflow never reaches zero. It starts at 307 L/day without a tank, falls to 137 L/day with twenty cubic metres and levels off there. That water will keep going to the drainage, for a reason no enlargement of the tank solves: the demand simply does not consume it. Rainwater harvesting systems do not hold water for the sake of holding it, and anyone seeking flood attenuation needs a detention tank, which is another project, with another sizing criterion.

Reliability grows faster than the potential. Going from 3,000 to 4,000 L, the saving potential gains 0.84 percentage points, while the days of full supply rise from 91.9% to 95.3%, and the days of shortage fall by two fifths. When the design criterion is comfort of use — rainwater never running out at the points that use it — and not the saving on the bill, reading the same table leads to another choice.

4.4.6. What we have so far

The tutorial adopts 4,000 L and moves on. It is the ideal volume by the hydraulic criterion with the 1 %/m³ threshold, and it is the value the project carries up to section 4.9, where it will be questioned again, this time with money and carbon included in the analysis.

Table 109 — State of the tutorial project after choosing the volume

Project so far	
series	New York, 30 years
catchment area	150 m²
total demand	600 L/day
suppliable fraction	28%
tank volume	**4,000 L**
saving potential	26.83%
days of full supply	95.3%

One hydraulic decision remains before money can be discussed: does this water need to go up to an elevated tank, or can it be pressurised directly from the cistern? That is the subject of section 4.5.

4.5. Is an upper tank needed?

> By the end of this section you will be able to answer the question with a number, not with habit. The answer usually surprises.

The classic rainwater harvesting arrangement uses two tanks: a buried cistern, which receives the water from the roof, and an elevated water tank, which feeds the points of use by gravity; between the two, a pump lifts the water. The arrangement is so widespread that almost every project adopts it without examining why, and this section examines it.

4.5.1. What the upper tank is for

The upper tank is not for storing more water; it is for delivering it. The distinction seems subtle and decides the whole analysis, because everything that follows depends on not confusing storage capacity with distribution capacity.

The cistern is buried, and the points of use — toilet, utility sink, garden tap — are above it. Something has to overcome that difference in level, and there are two ways of doing it with a pump.

- **Direct pressurisation.** A small pump with a pressure switch starts whenever a point is opened. There is no upper tank.
- **Pumping to an elevated tank.** The pump fills the tank from time to time, and gravity does the rest.

When the cistern is above the points of use, there is a third one: **gravity**, with no pump. Step **4. Tank & Costs** asks which of the three arrangements the project adopts, and it is this answer that defines the energy and the pump sets in the cost and in the carbon.

Table 110 — The three supply arrangements and what each one adds to the project

Arrangement	Energy calculated	Upper tank and pump sets
pumping to an upper tank	volume pumped, at the manometric head, plus the start-ups	enter the cost and the carbon
direct pressurisation	all the rainwater consumed, at the working pressure	only the pump sets
gravity	none	none

In direct pressurisation, step 4 asks for the model of the pressure pump, chosen from a catalogue of six generic reference models, A to F, each with an illustrative flow × pressure curve (none is a real product), the working pressure and the flow at the point of use. The pressure pump starts at each flush, 5.05 per person per day according to the end-use survey of Mayer et al. (1999), and stays on while the cistern of the toilet fills, at the pace of its float valve. The energy is that time multiplied by the electrical power. In the tutorial, at a head of 18 m, the smallest model would use 40.0 kWh per year, about five times the 7.7 kWh of pumping to a tank; section 2.6 explains why, and shows that the model chosen weighs more than the pressure.

Pumping to an elevated tank has three real practical advantages. The pump starts a few times a day, instead of dozens, which extends the life of the equipment; the pressure at the points of use is constant, because it comes from the height of the water column and not from the pump running; and there is a reserve available during a power cut. None of these three advantages is a water saving, and that is precisely the confusion this section clears up.

4.5.2. The fair comparison

Comparing a 4,000 L system without an elevated tank with another of 4,000 L plus a 1,000 L tank is a methodological trap, because the second has more total storage and would win for that reason, not because of the arrangement. To isolate the effect of the arrangement, the storage must be kept constant: so 5,000 L in a single tank is compared with 4,000 L below plus 1,000 L above.

Table 111 — Single tank compared with two tanks, keeping the same total storage (energy cost is illustrative, not a market price)

Same storage of 5,000 L	One tank only	4,000 below + 1,000 above
saving potential	27.24%	27.09%
days of full supply	97.0%	96.4%
volume pumped	—	59.4 m³/year
pump starts	—	69 per year
pump hours	—	12.6 h/year
energy	—	7.7 kWh/year
energy cost (illustrative, not a market price)	—	US$ 1.54/year
potential difference		**−0.15 points**

Keeping the same storage, the arrangement with an elevated tank delivers 0.15 percentage points less saving than the single tank. The difference is not a rounding error, and it has a cause: **the cistern overflows while the upper tank still has room**.

Rain enters only through the cistern, and the overflow is calculated there before the day's consumption. Pumping, however, only happens when there is consumption and the upper tank falls below the trigger level. So, on a rainy day with the cistern full, the water exceeding the 4,000 L below is lost even if the tank above has hundreds of litres free. A single 5,000 L tank would keep that water.

That is also why a higher trigger level yields more: with it, the pump fills the tank earlier, the cistern is emptier when the rain arrives, and it overflows less. The reserve below the trigger level is not locked away, because it is consumed right after each pumping and when the cistern runs dry.

> **The upper tank does not increase the water saving. It costs.** In our project it costs the tank, it costs the pump, it costs 7.7 kWh per year of energy, and it costs 0.15 points of potential compared with a single tank of the same total volume.
>
> That does not make it wrong. It makes the decision **hydraulic**, not one of water yield: adopt it if the project needs gravity pressure or a reserve against power cuts, and not expecting it to yield more water.

4.5.3. The trigger level

If you adopt the tank, there is a parameter to adjust: the reserve volume that is not consumed, below which the pump starts.

Table 112 — Effect of the pump trigger level on the saving potential and on the number of starts

Trigger level	Potential	Starts per year
0 L	27.04%	62
100 L	27.09%	69
300 L	27.12%	87
500 L	27.15%	120

A higher trigger level means **more potential and more starts**, for the reason above. From 0 to 500 L, the potential rises by 0.11 points and the starts almost double, from 62 to 120 per year.

The trade-off is between a marginal water gain and the wear of the pump. Residential pump sets cope well with a few starts a day; what kills them is continuous on-off cycling. One hundred and twenty starts a year is one every three days, and none of the values in the table comes close to being a problem.

> **Where the trigger level really matters** is in buildings with concentrated demand, where the tank empties quickly. There it can exceed a thousand starts a year, and it is better to size the tank than to adjust the trigger level.

4.5.4. The energy, and why it is small

Seven point seven kilowatt-hours a year. At an illustrative US$ 0.20 per kilowatt-hour, that is US$ 1.54 a year (illustrative, not a market price).

It looks too little, and it is worth understanding why. Lifting one cubic metre of water twelve metres costs, in hydraulic energy, about 0.033 kWh. With the efficiency of the pump and that of the motor, and adding the pump start-ups, it comes to about 0.13 kWh per cubic metre pumped. Sixty cubic metres a year give the 7.7 kilowatt-hours of the table.

Water is heavy, but twelve metres is little. That is why the energy cost of rainwater harvesting is negligible compared with the saving on the water and sewage bill — and that is also why the argument that «pumping water uses more energy than it saves» does not hold in small buildings.

> **Warning about the nameplate power.** The program asks for the efficiency **of the pump** and the efficiency **of the motor** separately. The nameplate power is the mechanical power at the shaft, and the motor efficiency is what separates what the shaft delivers from what the meter records. Left blank, the program adopts a default motor efficiency that depends on the rated power; replace it with the figure on the motor data sheet. Section 2.6 gives the details.

4.5.5. The tutorial's decision

We adopt pumping to a 1,000 L upper tank, with a 100 L trigger level.

The decision is hydraulic, not one of water yield. The elevated tank gives constant pressure at the points of use without depending on the pump at each flush, keeps water available during a power cut and makes the pump start 69 times a year, instead of the more than seven thousand starts of a pressure pump triggered at each flush by four residents, which would use 40 to 98 kWh per year depending on the generic model. The price is what the table shows: the tank, the pumps, 7.7 kWh per year and 0.15 points of potential compared with a single 5,000 L tank. There are two pumps, the duty pump and the standby, the usual precaution for a pumped system that the building cannot do without.

Compared with the 4,000 L cistern on its own, the potential rises from 26.83% to 27.09%, because the tank adds 1,000 L of storage. From here on, the cost, the carbon and the tutorial's decision include the tank, the two pump sets and the pumping energy.

Table 113 — State of the tutorial project after the decision on the upper tank

Project so far	
lower tank volume	4,000 L
arrangement	pumping to an upper tank
upper tank	1,000 L, 100 L trigger level
saving potential	27.09%

Now we know how much water the system delivers. It remains to know **what water** it is.

4.6. What quality the use requires

> By the end of this section the project will have a treatment line defined, and you will be able to tell what a standard requires from what the program recommends.

Up to this point the tutorial has treated rainwater only as volume: how much is collected, how much is stored, how much is consumed. Water, however, is also a quality, and quality costs money — in equipment at installation and in consumables every month. This section defines the quality class of the project and sizes the corresponding treatment line.

4.6.1. What standards say, and what they do not say

Rainwater harvesting standards differ from one country to another, and the program does not decide which one applies to your project. In general, a standard for non-potable use sets a short list of minimum parameters: a microbiological indicator such as *E. coli*, turbidity and pH, and, if chlorine is used, a range for the free residual. Disinfection is often left to the designer's discretion, and monitoring is asked for at a stated interval. Some standards divide the non-potable uses into classes with different requirements; others set a single set of parameters for all of them; others set no quality table and let the use and a risk assessment decide whether treatment beyond the filter is needed. Check the standard of the jurisdiction of the project and enter its limits as the criterion.

The program, in turn, offers four classes, and the reason is practical: toilet flushing and garden watering do not expose the user in the same way, even if a standard does not distinguish them (Figure 57).

> **Reuse is not harvesting.** Parameters set for the **reuse** of wastewater are usually much stricter than those for rainwater harvesting: absence of coliforms, a higher residual chlorine and lower turbidity. Rainwater is not reuse, and the table that applies to harvesting is the one in the rainwater standard, not the one in the reuse standard.

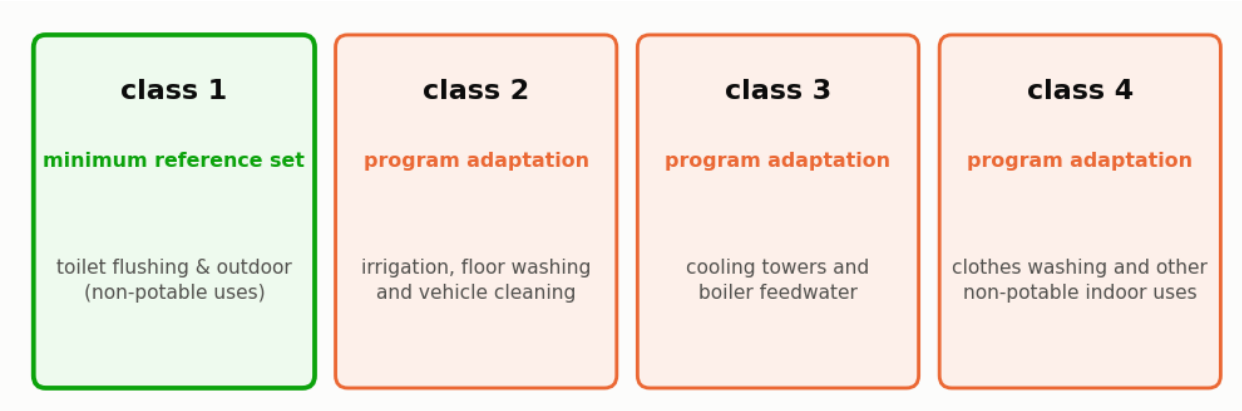


Figure 57 — The program's four quality classes and the status of each one. Class 1 is the minimum reference set, with the least demanding parameters; classes 2 to 4 are adaptations made by the program, suitable for comparing treatments and unsuitable for presentation as a normative requirement.

> **Classes 2 to 4 are adaptations made by the program, not by a standard.** Triton itself says so on the screen and in the report. In a published study, do not present them as a normative requirement: present them as the criterion adopted, and cite the source.

4.6.2. The class recommends, you decide

Choosing a class imposes no equipment on the project. The class expresses a recommendation of the program, based on the typical requirement of the intended use, and the decision to adopt it or not remains with whoever signs the project.

Table 114 — Treatment line by disinfection technology adopted: stages, ultraviolet energy and annual carbon

Disinfection	Stages	Annual UV energy	Annual CO_2e
Tablet chlorination	1	0.0 kWh	0.2 kg
Chlorination + ultraviolet	2	37.5 kWh	18.2 kg
Chlorination + ozonation	2	0.0 kWh	15.2 kg

Table 115 — Fine-filtration recommendation by quality class

Target class	Fine filtration recommended?
class 1	no
class 2	yes
class 3	yes
class 4	yes

The second table reveals the point: without the polishing filter, the four classes cost exactly the same. The target class changes a single thing, which is whether the program recommends fine filtration or not, and the corresponding filter only enters the budget when the user ticks it explicitly.

When the class recommends polishing and the user declines it, the program records the refusal in the report, instead of imposing the equipment silently or letting the decision go unrecorded. It is the right conduct in any design program: whoever signs decides, and the decision is documented for whoever comes later.

4.6.3. Disinfection

Disinfection is the stage on which the microbiological safety of the stored water depends, and the program offers three technologies. The difference between them is large, both in cost and in behaviour, and the criterion that separates them is not the effectiveness of disinfection — all three disinfect — but the persistence of the effect.

Tablet chlorination. A feeder with calcium hypochlorite tablets in the line, in one stage. It is the default option. It leaves a **residual** in the water, which protects the tank and the internal network against recontamination. The edition carries no equipment catalogue, so the cost of the line is whatever you enter in the economic step, from your own quotations; this manual quotes no price for treatment equipment.

Ultraviolet. A reactor with a UV lamp, in a second stage after chlorination. The lamp and the reactor use 37.5 kWh per year in this project. **It leaves no residual**: it disinfects what passes through it, and nothing protects the water afterwards.

Ozonation. Also a second stage after chlorination, also without residual.

> **Warning.** In the program, ultraviolet and ozone enter as an **additional** barrier to chlorination, not as substitutes. It is the right practice: without a residual, the treated water becomes contaminated again on the way to the point of use.
>
> That is why the UV and ozone lines add to the chlorine line instead of replacing it. Anyone who expected that replacing chlorine with UV would **reduce** the cost will see the opposite.

The carbon impact follows the same order: 0.2 kg CO_2e per year with chlorination, 18.2 with ultraviolet and 15.2 with ozonation, for the volume treated in this project, at the illustrative grid factor of 0.40 kg CO_2e/kWh. The difference is in the electricity consumed by the lamp and the ozone generator, since the chemical consumable of chlorination has a modest manufacturing emission by comparison.

4.6.4. The inlet filter

Before any disinfection comes the mechanical inlet filter, which removes leaves and coarse solids from the water before it reaches the tank. The program sizes it by the roof area, not by the intended quality class, because what this filter has to cope with is the peak flow of the roof — a quantity that does not depend on the final destination of the water.

Table 116 — Mechanical inlet filter sized by the roof area

Roof	Filter	Mesh
up to 200 m²	self-cleaning vortex DN 100	350 µm
up to 500 m²	self-cleaning vortex DN 150	400 µm
above	basket or cyclonic DN 200	500 µm

Our 150 m^2 roof is in the first range. These filters retain particles of a few hundred micrometres, well below a millimetre.

4.6.5. The incremental cost rule

The investment in the treatment line is not added in full to the total investment of the system, and the reason is to avoid double counting. The budget of a rainwater system already sets aside a generic treatment allowance within the accessories item, because no designer prices a system without some filtering; adding the detailed line on top of that allowance would charge treatment twice. The program deducts the generic allowance and adds only the increment, as Equation 31 formalises in section 2.5.

The same goes for the running cost: chlorination is already paid in the chemical consumables line of the cash flow, and the treatment line deducts that part so as not to charge the hypochlorite twice.

And in the life cycle assessment, the treatment line **replaces** the chlorination term instead of adding to it. Section 2.5 details the rule.

4.6.6. The tutorial's decision

Class 1, tablet chlorination, no polishing filter.

The water goes to the toilet and the outdoor area. Class 1, the program's minimum reference set (an *E. coli* limit, turbidity and pH, with a free-chlorine range), covers both. A project that adds the washing machine goes beyond the uses most standards list, and the responsible professional must define and declare the quality criterion for it, as section 4.2 records. Chlorination leaves a residual, it is the simplest of the three lines, and it has the lowest energy and carbon: 0.2 kg CO_2e per year. The first flush is sized in the same step; its chamber is the 300 L of section 4.1.

Table 117 — State of the tutorial project after defining the quality class

Project so far	
volume	4,000 L
quality class	1, minimum reference set
disinfection	tablet chlorination
polishing filter	no
annual carbon of the treatment line	0.2 kg CO_2e

We have volume, arrangement and quality. Now the question that decides whether the project leaves the drawing board.

4.7. What it costs and how fast it pays back

> By the end of this section you will have the twenty-year cash flow, and you will know why the **tariff structure of your water utility** decides the feasibility more than any parameter of the project.

> **Costs in this manual are illustrative.** The International Edition carries no price list. Every cost in the tutorial is a round number, in US dollars, chosen so that you can follow the method; it is **illustrative, not a market price**. The tariff is the exception: it is the New York water and sewer tariff stored in the example project. In your own study, type your quotations, your tariff and your currency in the economic step. The calculation that follows is the same, and so is the lesson about tariff structures.

4.7.1. The saving is the difference between two bills

The most common mistake in the economic analysis of rainwater systems is to multiply the volume saved by an average tariff. The result is often wrong, and the reason lies in the structure of tariffs, which in many places are progressive by consumption block, as section 3.3 details: the cubic metre that is no longer consumed is the last one on the bill, the most expensive, not the average one. Sewerage charges add a second effect, as the New York tariff shows below.

Triton avoids the problem by calculating two complete bills — the one the building would pay without the system and the one it pays with it — and taking the difference between the two.

Table 118 — Make-up of the New York water and sewer bill before and after the rainwater system

The New York water and sewer bill	Consumption	Amount
without the system	18.26 m³/month	US$ 89.37
with the system	13.31 m³/month	US$ 65.15
saving	4.95 m³/month	**US$ 24.21**

Table 119 — Economic indicators of the tutorial project over twenty years of analysis (all costs are illustrative, not market prices)

Twenty-year analysis (costs illustrative, not a market price)	Value
initial investment	US$ 6,250.00
annual water saving	US$ 290.53
annual running cost	US$ 2.63
net present value	−US$ 2,919.90
internal rate of return	−1.23% per year
discounted payback	no payback

The result deserves attention. The system saves 4.95 m³ per month and the bill falls by US$ 24.21, which is US$ 4.89 per cubic metre saved. That is 2.59 times the water charge of US$ 1.89 per cubic metre, and the difference is the sewer: New York charges sewerage at 159% of the water charge, so each cubic metre that is not drawn from the mains is not discharged either.

> **Sewage is a percentage of the water part, not of the total bill.** A sewer charge of 159% of the water means that the sewer part is 1.59 times the water part, so the sewer is more than three fifths of the bill. Saving water saves both parts, and that is why the effective value of the saved cubic metre is well above the water rate.

4.7.2. The New York tariff regime

New York charges the water by volume at a single rate from the first cubic metre consumed (US$ 5.35 per hundred cubic feet, the rate recorded in the example project from the New York City Water Board), adds the sewer at 159% of that charge, and applies a minimum daily charge that does not bind at this house's consumption.

For a rainwater harvesting project, this is a favourable structure: each cubic metre saved produces a discount from the first one. It is not progressive, so the saved cubic metre is worth the average one, which is why the value per cubic metre above is simply the water rate times 2.59. Cape Town, in section 3.1, has stepped blocks, and there the cubic metre saved is worth the price of the highest block the house reaches.

Not every utility works like this, and the difference between them decides the feasibility of entire projects. The program distinguishes six regimes.

Table 120 — The six tariff regimes and the effect of each one on the saving

Regime	What happens when saving
availability charge	each m³ saved is deducted
exponential formula	each m³ saved is deducted, at the base price raised to the exponent
no minimum	likewise
allowance in the minimum	saving below the allowance **deducts nothing**
retroactive allowance	beyond the allowance, everything from zero is charged
payment floor	the bill does not go below the floor

> **Warning, and it is the point that brings down most studies.** Where the utility charges a fixed value that already includes an **allowance**, say 10 m^3, a house that consumes 12 m^3 and saves 3 goes down to 9, enters the allowance, and **the bill stops falling**. The system saves water and does not save money.
>
> Running that case with an average tariff would produce a payback that does not exist. Section 3.3 teaches how to build the structure of your own utility correctly.

4.7.3. The investment

US$ 6,250, split as follows (every value illustrative, not a market price):

Table 121 — Make-up of the initial investment of the tutorial project (illustrative, not a market price)

Item	Value (illustrative, not a market price)
4,000 L concrete cistern	US$ 2,200
1,000 L polyethylene upper tank	US$ 650
two half-hp pump sets, duty and standby	US$ 500
labour and excavation	US$ 1,500
piping	US$ 600
accessories	US$ 800
total	**US$ 6,250**

The tank prices follow a simple illustrative rule, a fixed part plus a part per litre, different for each material: polyethylene 100 + 0.55 per litre, concrete 600 + 0.40, glass fibre 120 + 0.65 and stainless steel 300 + 2.00. A

4,000 L concrete cistern is therefore 600 + 1,600 = 2,200. These are not catalogue prices, and **the program does not apply this rule**: it is the way the author arrived at the figures typed into the tutorial project. In a real study you replace them with quotations.

The first-flush chamber. The first flush is not only the depth subtracted from the rain: it is a physical component, with a cost. Step **3. Quality & Treatment** sizes it by default, and in the tutorial the 2 mm depth over 150 m^2 needs a 300 L chamber. In this illustrative budget its cost sits inside the accessories line. A study that leaves the first flush out of the budget, while subtracting it from the rain, looks more feasible than the system that gets built. Section 2.5 details the sizing.

4.7.4. CAPEX in this edition: what you enter and what the program calculates

The International Edition carries no price list, so **it does not calculate an investment from prices**. It sizes the system, calculates the saving on the bill, the pumping energy and the quantity of chlorine, and multiplies those quantities by the prices you type. The investment is the sum of the values you enter. Nothing in the cost chain is filled in on your behalf, and no price was invented to fill the gap.

The table shows what a new project contains, read from the program.

Table 122 — What a new project of the International Edition contains, and what is left for you to enter

Field of the new project	Starting value	What it means
lower tank (cistern) and upper tank	0.00	to be entered by you
piping, accessories and labour	0.00	to be entered by you
price of each pump set	0.00	to be entered by you; the project starts with 2 pump sets, duty and standby
electricity tariff	0.0000 per kWh	to be entered by you; with no tariff, the pump energy costs nothing
water and sewer tariff	none	to be entered by you (section 3.3); with no tariff, the bill is zero
price of chlorine	0.00 per kg	to be entered by you; with no price, chlorine costs nothing
maintenance routines	3 routines, every 12 months, 0.00 in total	the names stay as a checklist; the costs are yours
automatic budget of the 3D layout	off	the program does not price the parts of the layout
automatic labour	off	the program does not estimate labour as a share of the materials
catalogue prices (tanks, treatment line)	off	the treatment line is sized but adds no cost
chlorine dose and tablet purity	1.5 mg/L and 65%	technical parameters, not prices
minimum attractive rate of return	2.0% per month	generic starting value of the program, not data of any country
cost inflation	0.2% per month	likewise
escalation of the water, sewer and electricity tariffs	5.0%, 5.0% and 5.0% per year	likewise
analysis period	20 years	the service life adopted; declare and justify it

What this means for you. Without your values the investment is zero, and the economic analysis shows only the saving on the water bill, and only after you enter a tariff. The net present value and the payback, in those conditions, say little: they are not results. The treatment line and the first flush are sized, and enter the

carbon balance, but they cost nothing until you price them in the investment. You have an economic analysis when you enter real quotations and the tariff you pay.

The internal cost file (`costs_database.json`) exists in every edition of the program, but in this one it holds only the structure: no prices, no currency and no regional factors. No calculation uses it; the costs are the ones you enter.

4.7.4.1. How to enter your values

In step **4. Tank & Costs**, the button *1. Initial Investment (CAPEX)* has fields for the upper tank, labour, piping and accessories; the button *2. Motor Pump & Energy Cost* has the price of the pump set and the electricity tariff; the button *3. Other Operational Costs* has the maintenance routines; and the button *4. Water and Sewage Tariffs* has the tariff. Enter the values of your own quotations, with the taxes you will pay if the investment is borne by the final consumer, in the currency of the project.

Three limitations of this version are worth knowing.

- **The cistern price has no field in the CAPEX dialog.** On confirming, the dialog sets that price back to zero. Until it is corrected, add the price of the cistern to one of the lines of the dialog, for example the accessories, and say so in the report; or write the value in the field `cost_lower_tank` of the block `capex_and_opex` of the project file, and do not confirm the CAPEX dialog afterwards.
- **One cistern price serves every volume of the sweep.** With no price list, the program cannot scale the price with the volume: the price you enter is used as it stands for each volume analysed, and in the volume sweep for all of them. The net present value curve against the volume (Figure 58) then shows how the saving changes with the volume against a fixed cistern price. To compare volumes on cost, run the project once per volume, each with its own quotation.
- **The price of chlorine has no field in the interface.** It exists only in the project file, in the block `water_quality_and_etap`, as `chlorine_cost_per_kg`. Alternatively, add in *3. Other Operational Costs* a routine with a variable cost per cubic metre of rainwater.

4.7.5. The result

The second table above gives the indicators.

The project does not pay for itself, and that is the honest result. Over twenty years, with these illustrative costs and the New York tariff, the net present value is −US$ 2,919.90, the internal rate of return is −1.23% per year, and there is no discounted payback within the period. We did not adjust the costs until a payback appeared.

The reason is not a defect of the example. Water is cheap in New York relative to what a tank, two pumps and the labour cost, and the 28% fraction limits the saving to less than five cubic metres a month, US$ 290.53 a year. A tariff that rewards the cubic metre more, a larger suppliable fraction or a cheaper installation changes the account, and section 3.7 varies each of these in turn. It also shows that none of the assumptions tested, taken alone, produces a payback in this case. Only the tutorial carries costs, so section 3.1 compares the three cities on saving potential, not on payback.

The running cost is small: US$ 2.63 per year, of which US$ 1.54 is pumping energy, the 7.7 kWh per year of section 4.5 at an illustrative US$ 0.20 per kilowatt-hour, and US$ 1.10 is chlorine, 0.14 kg of product per year at an illustrative US$ 8 per kilogram. The energy comes from the same function that feeds the environmental assessment, according to the arrangement declared in step **4. Tank & Costs**: pumping to an upper tank, direct pressurisation or gravity. This figure does not include the three maintenance routines of US$ 90 per year, which enter the cash flow separately; the next section shows how much they weigh.

The result of an isolated volume says little without its neighbours. The economic tab repeats the calculation for all the volumes of the sweep and plots the curve, and it is there that you can see whether the technical optimum and the economic optimum fall in the same place (Figure 58).

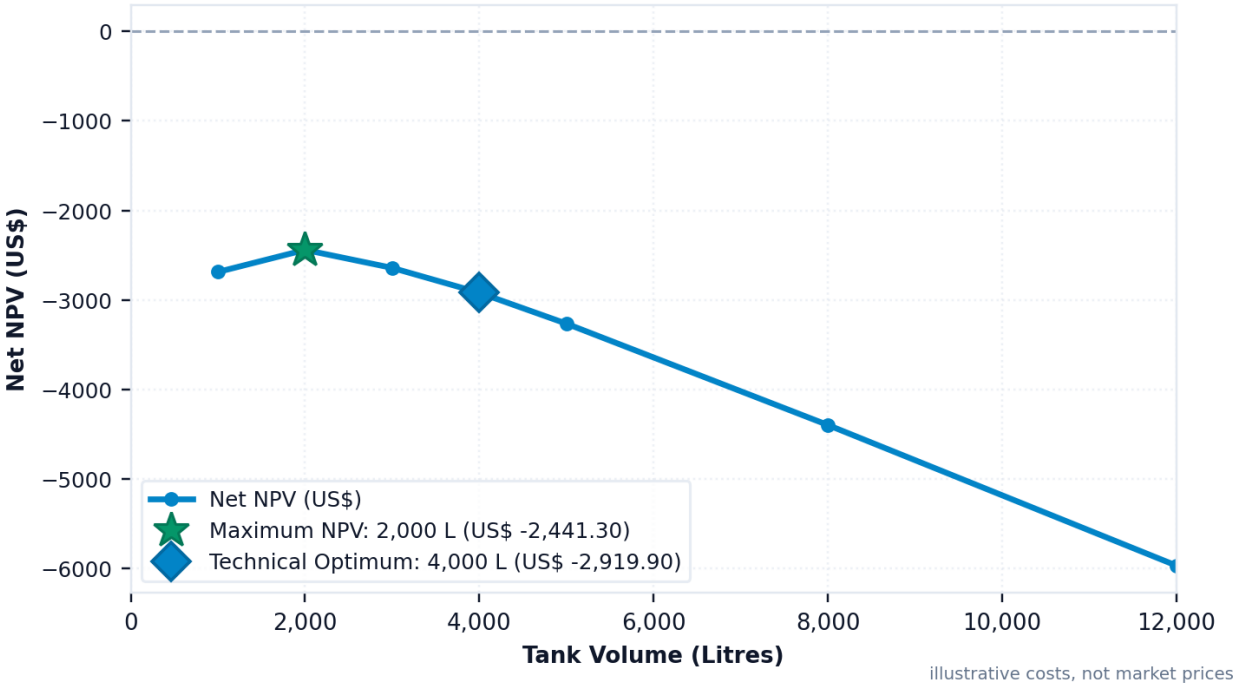


Figure 58 — The chart of the economic tab: the net present value of each volume of the sweep, with the economic maximum and the technical optimum marked. When the two coincide, the program marks them with a single symbol. All costs are illustrative, not market prices. Figure generated by the program itself.

4.7.6. What goes into the running cost (OPEX)

Here too the program fills in no price. The running cost of a new project adds the energy of the pump, the chlorine, the cost of the treatment line and the maintenance routines, and **every one of those prices starts at zero**: the electricity tariff, the price of chlorine and the cost of each routine. The three routines exist as a checklist, with a period of 12 months, and you give them a cost.

Table 123 — Where each part of the running cost comes from in the International Edition

Part of the running cost	What the program calculates	What you supply	Illustrative in the tutorial
pump energy	the annual energy of the pump set, from the chain of section 2.6	electricity tariff, taxes on it, annual escalation	US$ 0.20 per kWh
chlorine	the kilograms of product per year, from the dose, the purity of the tablet and the rainwater volume used	price per kilogram (project file only)	US$ 8 per kg
treatment line	the sizing: class, disinfection, filter, first-flush chamber	the price of the equipment, inside the investment	none: catalogue prices are off
maintenance routines	the month in which each falls due (every 12 months, from month 12)	a fixed cost and, if you wish, a cost per cubic metre	US$ 20, 40 and 30 per year

The program calculates only the **quantities**: the annual energy of the pump set, by the chain of section 2.6, and the kilograms of chlorine, by the dose and the purity of the tablet. The cost is the quantity times the price you enter. With a price of zero the cost is zero, and not a figure left out.

The routines weigh more than the rest. The annual running cost that the summary of the analysis shows adds only the energy, the chlorine and the treatment line. The routines enter the cash flow separately, in months 12, 24, 36 and so on, corrected for inflation. In the tutorial, with illustrative values, they move the result:

Table 124 — Effect of the three illustrative maintenance routines on the running cost in the summary and on the result of the tutorial (illustrative costs, not market prices)

Tutorial project (illustrative costs, not market prices)	With the routines	Without the routines
maintenance routines per year	US$ 90.00	US$ 0.00
annual running cost in the summary: energy, chlorine and treatment	US$ 2.63	US$ 2.63
net present value	−US$ 2,919.90	−US$ 1,509.27

Energy. The electricity tariff starts empty. Use your own bill. The tutorial's US$ 0.20 per kilowatt-hour is a round number chosen to follow the method, not a tariff of any country.

What does not enter. The cash flow has no replacement of equipment over the 20 years, no residual value, no laboratory analysis of the water and no insurance. If the pump or the filter is replaced within the period, add the replacement as a routine in *3. Other Operational Costs*.

How to change or switch off. Routines are edited, deleted or added with the button *3. Other Operational Costs*. Set the cost of a routine you do not want to zero rather than deleting every routine: with an empty list, the economic step may restore a starting list whose costs are reference values of the program's internal file, not yours. The dose of chlorine and the physical first flush are chosen in step **3. Quality & Treatment**. The electricity tariff and its taxes are in *2. Motor Pump & Energy Cost*.

4.7.7. What the projection assumes

Twenty years is a long time, and the projection depends on assumptions worth declaring:

Table 125 — Assumptions of the economic projection and the weight of each one in the result

Assumption	Value adopted	Where it weighs
minimum attractive rate of return	0.4% per month	discounts the flow; the higher, the worse the NPV
cost inflation	0.2% per month	applies only to the running cost
water tariff escalation	3% per year	applies to the saving
sewage tariff escalation	3% per year	likewise, and indexed separately
escalation interval	12 months	in steps, not continuously
analysis period	20 years	the service life adopted; declare and justify it

All of these values are illustrative choices of the tutorial, not data of any country.

> **The water and sewage escalations are separate**, not a single index on the aggregate bill. The two parts are often adjusted by different decisions of the utility, and treating them together indexes part of the bill by the wrong index.

The tariff escalation is the most fragile assumption of the list. Three per cent a year for twenty years multiplies the tariff by 1.81. If the real tariff rises more than that, the project returns more; if it rises less, it returns less. A serious study declares the value adopted and shows the sensitivity — section 3.7 teaches how.

4.7.8. What we have so far

Table 126 — State of the tutorial project after the economic analysis (illustrative, not a market price)

Project so far (illustrative, not a market price)	
volume	4,000 L, concrete
arrangement	pumping to a 1,000 L upper tank
investment	US$ 6,250
annual saving	US$ 290.53
NPV over 20 years	−US$ 2,919.90
payback	none within 20 years

Money says no.

It remains to hear the carbon. And it will not simply agree.

4.8. How much carbon it avoids

> By the end of this section you will have the carbon balance of the system and a surprise: with the cistern we chose, the project **emits more than it avoids** over its service life.

4.8.1. The calculation

A rainwater harvesting system avoids emissions because each cubic metre it delivers is no longer abstracted, treated and pumped by the utility, and those three operations consume energy. The same system, however, emits carbon on three fronts of its own: the manufacture of its components, the energy consumed by internal pumping and the treatment consumables applied to the water.

The environmental balance of the system is the difference between what it avoids and what it emits, and the question that organises this section is in how many years the net annual credit pays off the debt incurred in manufacture. That period is the **carbon payback**, and it plays in the environmental dimension the same role that the payback period plays in the economic one.

> **The factors are illustrative.** The International Edition carries no emission factors: the environmental assessment is not calculated until you enter those of the project's country (appendix C). The tutorial uses two round figures, **0.40 kg CO_2e per kilowatt-hour** of grid electricity and **0.50 kg CO_2e per cubic metre** of mains water avoided. They are illustrative, not data of any country, chosen so that you can follow the method; the shape of the result, not its digits, is the lesson.

For our project, a 4,000 L concrete cistern pumping to a 1,000 L upper tank:

Table 127 — Carbon balance of the tutorial project with a concrete cistern (illustrative factors)

Part	Value
carbon embodied in the system	858 kg CO_2e
emission avoided per year	29.7 kg CO_2e
annual emission of pumping and treatment	3.3 kg CO_2e
net annual balance	26.4 kg CO_2e
carbon payback	**32.5 years**
balance at the end of 20 years	**+330 kg CO_2e**

It takes thirty-two and a half years to pay off the carbon debt, against an adopted service life of twenty years. The system therefore does not pay for itself environmentally: when it is decommissioned, it will have emitted 330 kg CO_2e more than it avoided over its whole operation.

And the financial result of the same project was negative too, which does not make the two verdicts the same: as the next sections show, a change of material alone reverses the carbon verdict, while the financial one stays put. That is why the dimensions of analysis must be kept separate until the moment of decision.

4.8.2. Why the carbon saving is so small

Thirty kilograms of CO_2e per year seems little for 59 cubic metres of water saved, and with these factors it is: 0.50 kg CO_2e per cubic metre replaced, less the energy to pump it.

The explanation lies in the nature of the product replaced. Treated water is not a carbon-intensive good. Abstracting, treating and distributing water costs a fraction of a kilogram of CO_2e per cubic metre delivered, depending on the local electricity mix and on the source, and that is modest compared with the carbon of concrete, steel or fuels. Replacing a low-carbon product with another that requires the manufacture of a tank therefore does not produce the environmental gain intuition suggests.

> **The boundary matters.** The program's factor is per cubic metre **delivered** to the building, not per cubic metre produced at the plant. Distribution losses mean that one cubic metre produced delivers less than one: using the plant-outlet factor would underestimate the avoided emission. Section 2.8 gives the details.

The environmental tab shows the same balance in graphic form, with the emission parts and the credit of the avoided water separated (Figure 59).

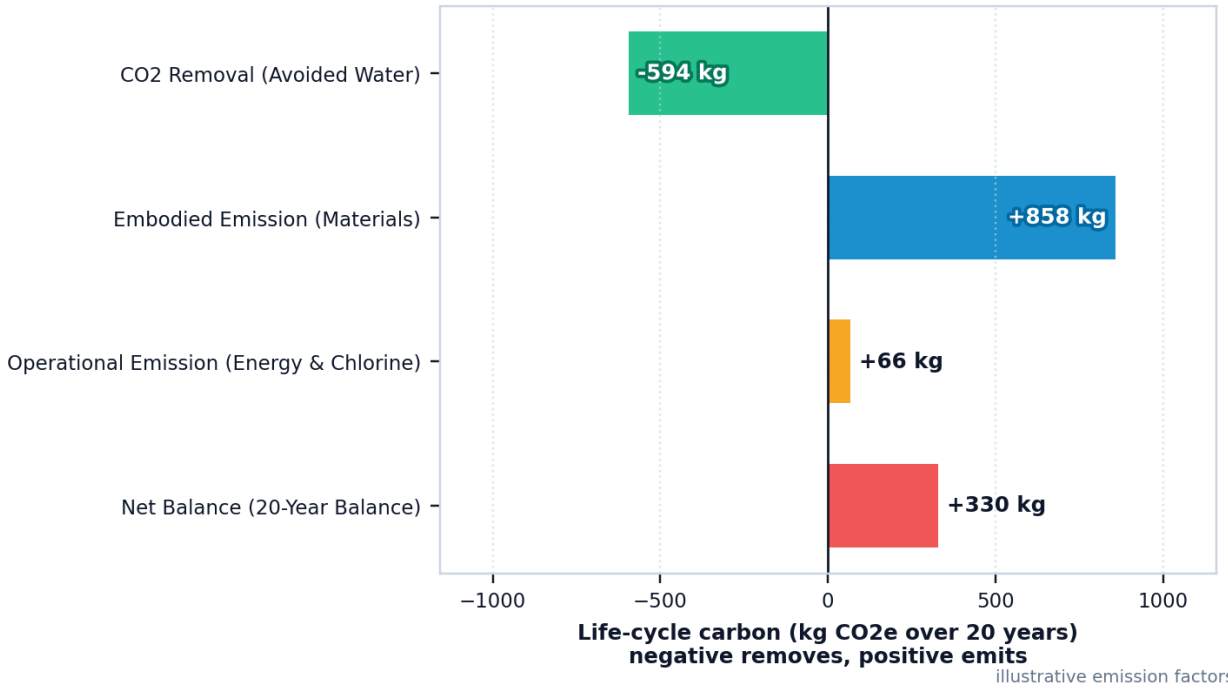


Figure 59 — The chart of the environmental tab for the same project, with a concrete cistern: the parts of the carbon balance over twenty years, with illustrative factors. The sign follows the convention adopted throughout this chapter: emissions positive, avoided water negative. Figure generated by the program itself.

4.8.3. The material decides the sign

The carbon debt is almost all in the cistern. And a 4,000 L cistern can weigh 88 kg or 4,800 kg, depending on the material. The table below and Figure 60 show the path of the net emissions over the service life, and Figure 61 the final result of each material.

Throughout this chapter, **positive emits and negative removes**. It is the convention of the balance chart of the program's environmental tab, and the one that keeps the reading of an emissions chart intuitive: the line going down is the one improving.

Table 128 — Net carbon emissions of the tutorial project according to the tank material (prices are illustrative, not market prices)

Cistern material	Mass	Embodied carbon	Carbon payback	Net emissions over 20 years	Price (illustrative, not a market price)
Polyethylene (HDPE)	88 kg	327 kg CO_2e	12.4 years	−200 kg	US$ 2,300
Reinforced concrete	4,800 kg	858 kg CO_2e	32.5 years	330 kg	US$ 2,200
Glass fibre	57 kg	371 kg CO_2e	14.1 years	−156 kg	US$ 2,720
Stainless steel	152 kg	748 kg CO_2e	28.4 years	220 kg	US$ 8,300

Table 129 — Effect of the concrete cistern volume on the net carbon emissions

Concrete volume	Carbon payback	Net emissions over 20 years
2,000 L	21.3 years	31 kg CO_2e
3,000 L	26.8 years	176 kg CO_2e
4,000 L	32.5 years	330 kg CO_2e
8,000 L	56.5 years	988 kg CO_2e

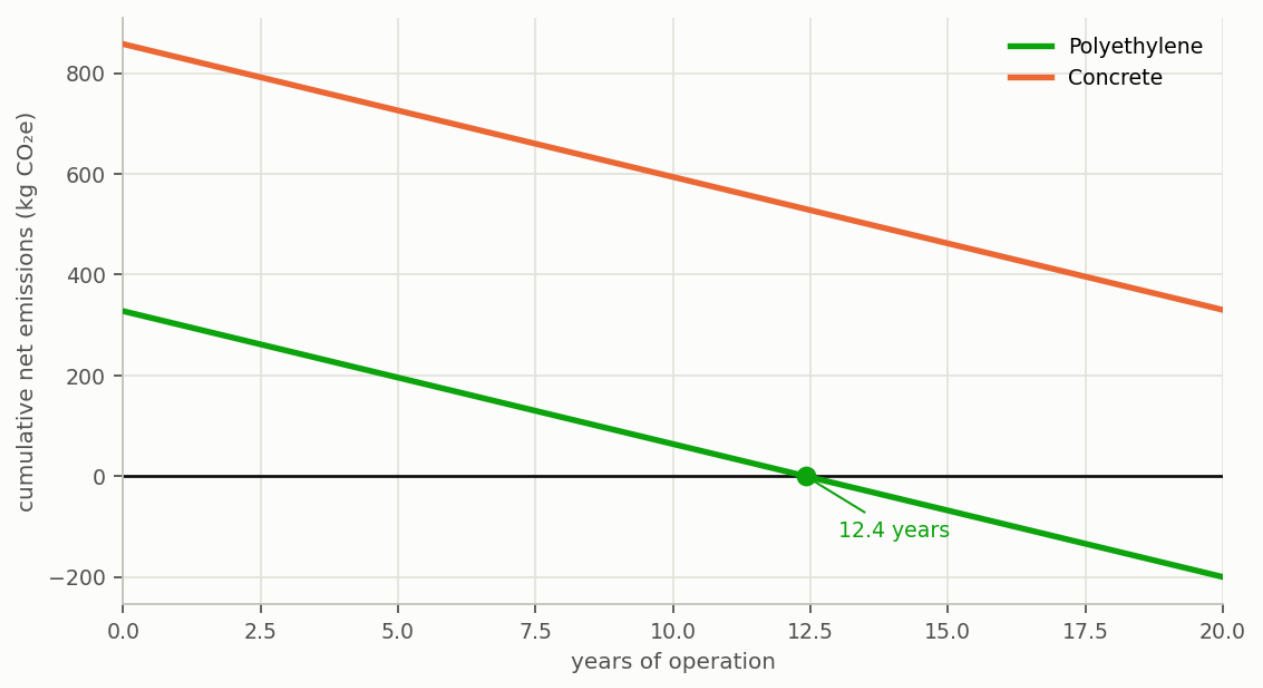


Figure 60 — Cumulative net emissions of the 4,000 L cistern over the service life, for polyethylene and concrete, with illustrative factors. The curve starts from the carbon embodied in manufacture, above zero, and goes down with the annual credit of the avoided potable water; polyethylene crosses zero at 12.4 years and ends the service life removing carbon, and concrete does not cross it in the twenty years adopted (it would at 32.5 years).

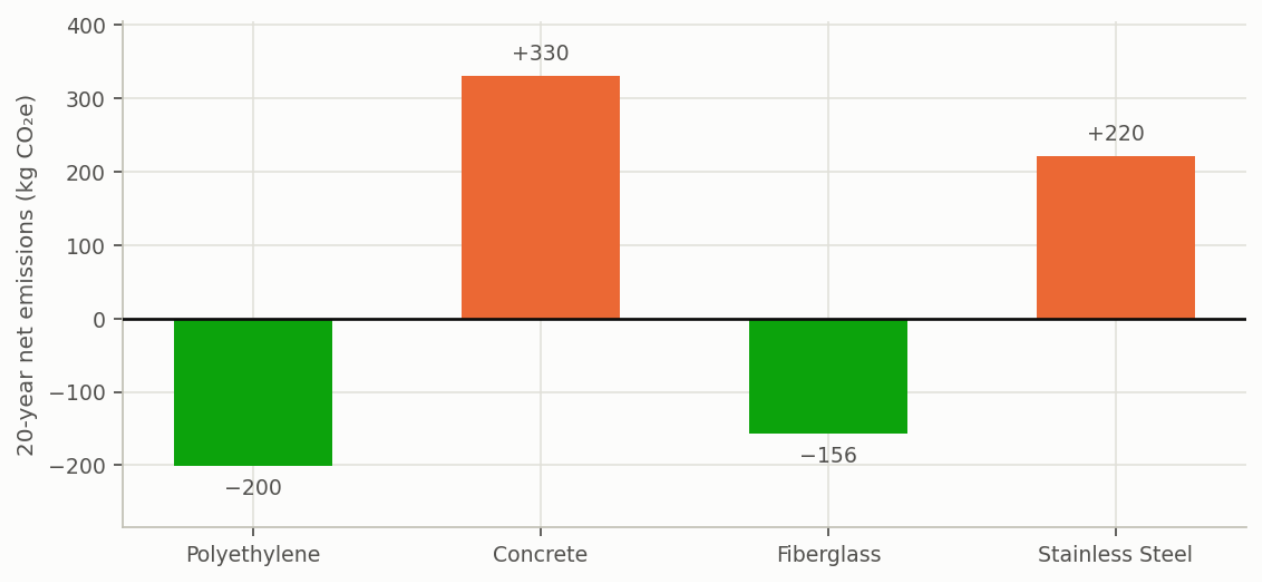


Figure 61 — Net emissions over twenty years of the 4,000 L cistern, by material, with illustrative factors. In green, a negative value, that is, a net removal; in orange, positive: two of the four materials end their service life having emitted more than they avoided.

The choice of material reverses the result.

Polyethylene pays off the debt in 12.4 years and ends the twenty years having removed 200 kg. Glass fibre takes 14.1 years and removes 156 kg. Concrete takes 32.5 years and ends having emitted 330 kg. Stainless steel takes 28.4 years and also ends up emitting, 220 kg. With a 28% suppliable fraction, little water is saved, and only the light materials manage to pay for their own manufacture.

And the second table shows the other side of the same coin: in concrete, **the larger the cistern, the worse the carbon**. The 2,000 L one closes the twenty years having emitted 31 kg; the 8,000 L one, 988 kg, and its carbon payback stretches to 56.5 years. The extra volume costs carbon in manufacture and yields less and less water.

4.8.4. There is an environmentally optimal volume

The observation above holds for concrete, but it is a particular case of something more general. The embodied carbon grows almost linearly with the volume; the avoided water grows with the supply, which saturates. The sum of the two parts has an **interior optimum**: there is a volume beyond which each additional litre of storage emits more than it avoids. Figure 62 shows the two curves.

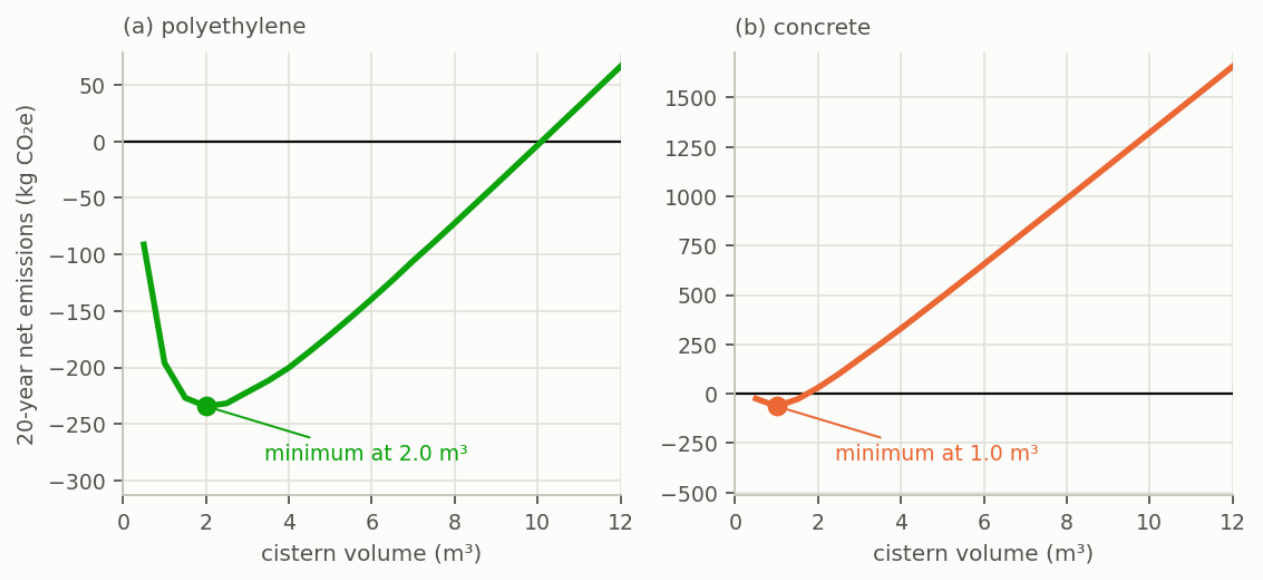


Figure 62 — Net emissions over twenty years against the cistern volume, for (a) polyethylene and (b) concrete, in the tutorial project, with illustrative factors. In polyethylene (with the 1,000 L upper tank) the balance is best, among the volumes tested, at 2 m^3, where it removes 234 kg, and it turns to emission between 8 and 12 m^3: above that volume the system emits more than it avoids. In concrete the net emissions are positive from 2 m^3 up.

More storage is not monotonically better for the climate. It is the opposite of what common intuition suggests, and it follows from a simple property: the saturation of supply. The volume that minimises emissions is not the same as the one that maximises the water saving — and section 4.9 deals with how to decide between the two.

> **The lightest is also the best for carbon, at about the same price.** At the illustrative prices, polyethylene costs US$ 2,300 against US$ 2,200 for concrete (illustrative, not market prices) — price hardly separates them — but it weighs about fifty-five times less, and it is the material that closes the twenty years with the widest margin among the four.
>
> This is not luck. Mass is carbon, and reinforced concrete is by far the most massive material on the list.

4.8.5. When concrete still makes sense

The table does not condemn concrete. It says that it needs a justification.

- **Longer service life.** The program adopts 20 years for all materials. It is a floor, not a forecast: a well-built concrete cistern can last much longer, and over a horizon beyond 33 years the 32.5-year carbon payback is paid off, although without margin. If you adopt a different service life, **declare** it and justify it.
- **Large volumes.** For very large volumes, factory-made polyethylene tanks stop being practical and cast-in-place concrete may be the only feasible option.
- **Space restrictions.** A buried concrete cistern adapts to the plot; a polyethylene one comes in fixed shapes.
- **Existing structure.** A concrete tank reused from another purpose has **zero** embodied carbon for the purposes of this project.

4.8.6. The tutorial's decision

We switch to polyethylene.

It is what a designer would do faced with this table, and it is what makes this tutorial honest: a study changes course when the analysis shows the course was wrong.

The switch costs little and changes the sign of the carbon, without changing the saving potential. The financial result stays negative, and a little worse, because the polyethylene cistern is US$ 100 dearer at these illustrative prices:

Table 130 — Effect of switching from concrete to polyethylene on the three dimensions of analysis (illustrative, not a market price)

(illustrative, not a market price)	Concrete	Polyethylene
cistern price	US$ 2,200	US$ 2,300
total investment	US$ 6,250	US$ 6,350
financial payback	none	none
NPV over 20 years	−US$ 2,920	−US$ 3,020
carbon payback	32.5 years	12.4 years
net emissions over 20 years	+330 kg	−200 kg

Table 131 — State of the tutorial project after the environmental analysis (illustrative, not a market price)

Project so far (illustrative, not a market price)	
volume	4,000 L
material	**polyethylene**
investment	US$ 6,350
NPV	−US$ 3,020
financial payback	none
carbon payback	12.4 years

4.8.7. What to declare

Triton's life cycle assessment is a **screening** one, not a complete inventory. All the default factors have a declared source, but some are approximations, such as that of the pump set and that of the hypochlorite, and a factor typed in without a source receives a screening label, which the program displays. In a published study:

- declare the **boundary** adopted, water delivered and not produced;
- declare the **service life** and justify it;
- declare which factors are approximations and which were entered without a source;
- declare the **electricity grid basis** and the year.

Appendix C has the source of each factor, and section 2.8 explains the seven stages of the inventory.

We now have three answers. The potential says one volume, money says another, carbon says a third. It is time to choose.

4.9. Which volume to choose, after all

> By the end of this section you will have a recommended band of volumes, and you will know that it depends on weights that **you** declared — not on a truth the program discovered.

4.9.1. Four questions, different answers

The previous sections asked the same project how much water it delivers, how much money it returns and how much carbon it avoids. Version 0.2.0 adds a fourth question: how heavy the system is and how much water it still throws away. The answers do not coincide. That is not a defect of the analysis or of the data: the criteria measure different things and respond differently to the tank volume.

The program judges each volume by eight criteria in four dimensions. Section 2.10 defines each one as the program computes it.

Table 132 — The eight multi-criteria criteria, their dimension and the direction of preference of each one

Dimension	Criterion	Direction
technical	volumetric reliability	maximise
technical	storage efficiency	maximise
economic	net financial savings (NPV)	maximise
economic	levelised cost of water (LCOW)	minimise
economic	discounted payback	minimise
environmental	net life-cycle CO_2e	minimise
structural	dry mass of materials	minimise
structural	annual overflow	minimise

Table 133 — Multi-criteria decision matrix: the eight criteria of each candidate volume, as the program computes them (costs are illustrative, not market prices)

Volume	Volumetric reliability	Storage efficiency	Net saving (NPV)	LCOW	Discounted payback	Net life-cycle CO_2e	Dry mass	Overflow
L	%	% of the volume per day	US$	US$/m³	years	kg	kg	m³/year
1,000	77.03	12.94	−US$ 2,338	US$ 10.13	no payback	−196	68	64.8
2,000	90.21	7.58	−US$ 2,241	US$ 9.43	no payback	−234	90	56.7
3,000	94.26	5.28	−US$ 2,592	US$ 9.76	no payback	−222	112	54.2
4,000	96.76	4.06	−US$ 3,020	US$ 10.24	no payback	−200	134	52.6
5,000	97.86	3.29	−US$ 3,516	US$ 10.83	no payback	−171	156	51.9
8,000	99.25	2.08	−US$ 5,098	US$ 12.79	no payback	−72	222	50.9
12,000	99.84	1.40	−US$ 7,269	US$ 15.51	no payback	66	310	50.4

Table 134 — Winning volume under each dimension taken alone, and the TOPSIS choice band with the four dimensions together

Dimension taken alone, or the four together	Volume
technical: highest volumetric reliability	12,000 L
economic: shortest discounted payback, ties broken by the net saving	2,000 L
environmental: lowest net life-cycle CO_2e	2,000 L
the four dimensions equal: TOPSIS choice band, within 5% of the score range	**2,000–3,000 L**
the four dimensions equal: highest TOPSIS score	2,000 L

The first table is the portrait of the problem. Read it dimension by dimension:

- **Technical.** Volumetric reliability rises with the volume, from 77.03% of the rainwater demand at 1,000 L to 99.84% at 12,000 L. Storage efficiency falls: a 1,000 L cistern delivers 12.94% of its volume each day, a 12,000 L one only 1.40%. The two criteria pull in opposite directions on purpose. One rewards the water delivered; the other counts the cubic metres that stand idle.
- **Economic.** The net saving is negative at every volume (the costs are illustrative, not market prices); the smallest loss is at 2,000 L. The LCOW traces a U, with its minimum at 2,000 L. No volume pays back, so every one receives the same payback penalty and the payback weighs nothing in this tutorial.
- **Environmental.** The most carbon avoided is at 2,000 L, closely followed by 3,000 L. At 12,000 L the life-cycle balance turns to emission.
- **Structural.** The dry mass grows with the volume; the overflow falls. This dimension also pulls both ways.

No volume wins on all eight criteria at once. Each has its optimum at a different point of the curve, and the choice between them is not a technical question with a single answer. It is a question of priority, which whoever decides must declare and the program cannot discover. That is the gap multi-criteria methods fill.

4.9.2. How TOPSIS solves it

The method works in four linked steps. First it normalises the decision matrix, so that criteria measured in incomparable units — percentages, currency, kilograms and cubic metres — come to occupy the same scale. Then it applies the declared weights. It then calculates, for each volume, the Euclidean distance to the ideal solution, made up of the best value of each criterion, and to the anti-ideal solution, made up of the worst. Finally it ranks the volumes by their relative closeness to the ideal, as formulated in section 2.10.

The weights are declared per dimension. Each dimension weight is shared among its criteria by the **criterion shares**, equal by default. With the four dimensions at 25%, each technical and each structural criterion weighs 12.5%, each economic criterion 8.33% and the single environmental criterion 25%.

Applied to the tutorial project with the four dimensions equal, the method does not single out one volume. It returns a **choice band of 2,000 to 3,000 L**: both score within 5% of the score range, counted from the highest score, which is at 2,000 L. 4,000 L comes next, just outside the band (section 2.10 gives the scores and defines the band).

Four statements a published study must make.

The answer is a **band**, not a volume. Report the volumes within the tolerance of the highest score, the tolerance (5% of the score range by default) and the weights; the highest score is information, not a verdict.

The program's normalisation is a **variant** of Hwang and Yoon: it shifts by `x - min(x)` before the vector normalisation, to admit a negative NPV. It is a deliberate choice, and presenting it as canonical TOPSIS would be incorrect.

SMAA-VIKOR, available alongside, draws weights and returns the probability of each volume taking each rank. It is the right answer when there is no consensus on the weights.

Opricovic's conditions C1 and C2, of acceptable advantage and of stability, **are not implemented**. Section 2.10 gives the details.

The decision tab shows the score of each candidate volume (Figure 63), and its conclusion states the band, not a winner: «TOPSIS band (equal weights): 2000–3000 L · highest score: 2000 L (0.78)».

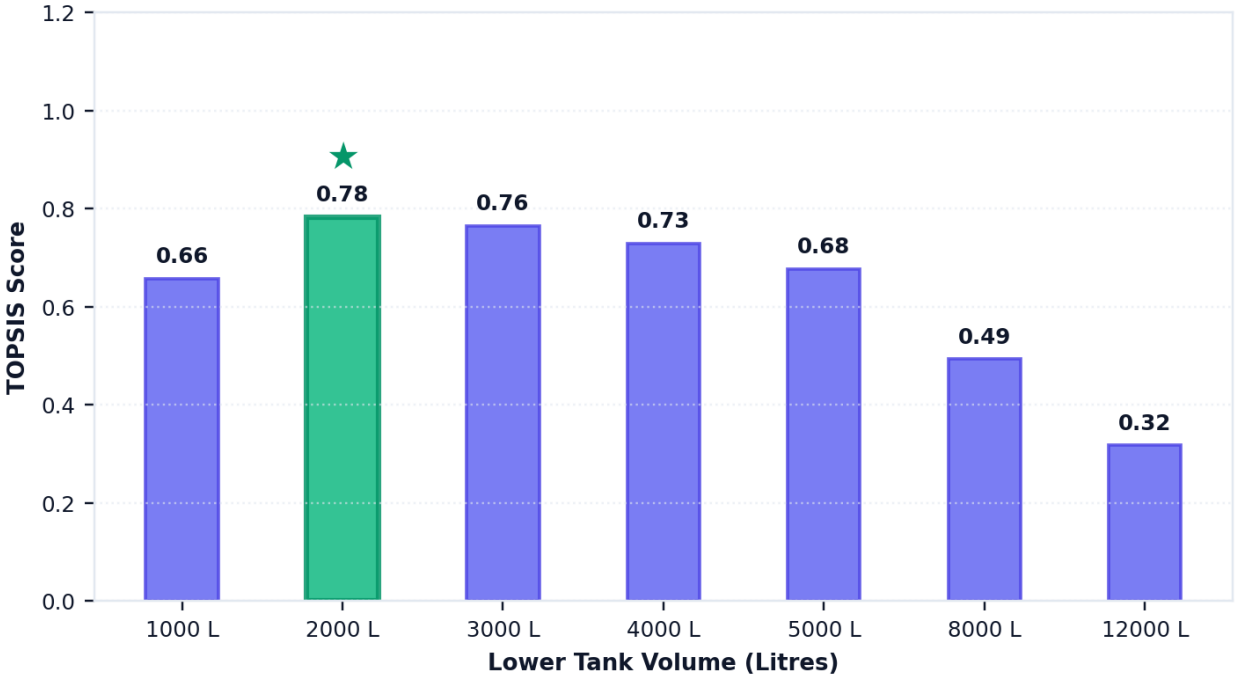


Figure 63 — The chart of the decision tab: the closeness-to-ideal score of each candidate volume, with the four dimensions weighted equally and the highest score marked with a star. Scores close to one another mean technically equivalent alternatives: that is what the choice band reports, and within it the choice comes to depend on the declared weight. Figure generated by the program itself.

4.9.3. The weight changes the answer

The first table below gives 70% of the weight to one dimension and 10% to each of the other three; the second sets the storage-efficiency share to zero; the third lets the results set the weights. Each row gives the choice band, the volume with the highest score and its score margin over the runner-up.

Table 135 — TOPSIS choice band (the volumes within 5% of the score range, counted from the highest score) according to the dimension given the dominant weight (70% on it, 10% on each of the other three), with the highest score, the runner-up and the score margin between them

Dominant weight	Choice band	Highest score	Runner-up	Score margin
equal weights, 25% on each dimension	2,000–3,000 L	2,000 L	3,000 L	0.018
technical, 70%	1,000 L	1,000 L	2,000 L	0.059
economic, 70%	2,000–3,000 L	2,000 L	3,000 L	0.022
environmental, 70%	2,000–3,000 L	2,000 L	3,000 L	0.019
structural, 70%	3,000–4,000 L	4,000 L	3,000 L	0.012

Table 136 — The same with the share of storage efficiency set to zero, so that the technical dimension measures volumetric reliability alone

Weights, with the storage-efficiency share at zero	Choice band	Highest score	Runner-up	Score margin
equal weights, 25% on each dimension	3,000–4,000 L	4,000 L	3,000 L	0.001
technical, 70%	4,000–5,000 L	5,000 L	4,000 L	0.029

Table 137 — Declared equal weights and the objective weights the CRITIC method computes from the seven volumes, summed per dimension, with the TOPSIS choice band each gives

Weights	Technical	Economic	Environmental	Structural	Choice band	Highest score	Score margin
declared, equal	25.0%	25.0%	25.0%	25.0%	2,000–3,000 L	2,000 L	0.018
objective, CRITIC	35.7%	21.5%	10.5%	32.3%	3,000–4,000 L	4,000 L	0.002

A dominant technical weight does not push the volume up, as one might expect. It pulls it down to 1,000 L, alone in its band. Reliability gains 13 points from 1,000 to 2,000 L and fewer than 10 more all the way to 12,000 L, while storage efficiency keeps falling. With equal shares the two count the same, and the smallest cistern, the best on efficiency, comes first. Set the share of storage efficiency to zero, so that the technical dimension measures reliability alone, and the technical band rises to 4,000–5,000 L, with the highest score at 5,000 L.

This is also why the technical optimum depends on the question asked. The most reliable volume of the candidates is 12,000 L. The marginal-gain threshold of section 4.4 stops at 4,000 L. And the technical dimension of TOPSIS, with its two criteria, prefers 1,000 L. The three answers are consistent; they answer different questions, and the study must say which one it used.

Under a dominant economic or environmental weight the band stays at 2,000–3,000 L, with the highest score at 2,000 L, the LCOW minimum and the carbon minimum. Only the structural dimension moves it, to 3,000–4,000 L: the dry mass rises with the volume while the overflow falls, and the balance between the two lies there. The score margins are small throughout, a few hundredths at most, which is why every band but the technical one holds two volumes.

Weights from the results. The third table replaces the declared weights with the objective weights of the CRITIC method (section 2.10), which the program computes from the seven volumes themselves. CRITIC gives the technical dimension 35.7%, the structural 32.3%, the economic 21.5% and the environmental 10.5%. The payback weighs nothing, because no volume pays back and the penalty is the same for all. The remaining seven criteria vary about equally across the volumes, but reliability and overflow move against most of the others, so they carry the most information the rest do not, and weigh most. The band moves to 3,000–4,000 L, with the highest score at 4,000 L, 0.002 ahead of 3,000 L. These weights state nobody's priority: they say which criteria separate these seven volumes, and another set of volumes would give other weights.

The multi-criteria ranking narrows the volume down; it does not say whether to build. In this tutorial every volume has a negative NPV and no payback at the illustrative costs, so the financial dimension argues against building at all. If the project goes ahead, it is for the reasons the other dimensions give or for a purpose the cash flow does not measure, and the report must say so.

> **Declare the weights and the band.** «Optimal volume by TOPSIS» without the weights is an impossible statement to reproduce. State the four dimension weights and the criterion shares — or that the weights came from CRITIC, and what they were — with the band and its tolerance. Two papers with different weights reach different bands and both are right.

A compromise solution gives up something, and it is worth knowing what. The program unfolds the single score into eight, one per criterion, and shows how close each volume comes to the best value reached in each of them (Figure 64).

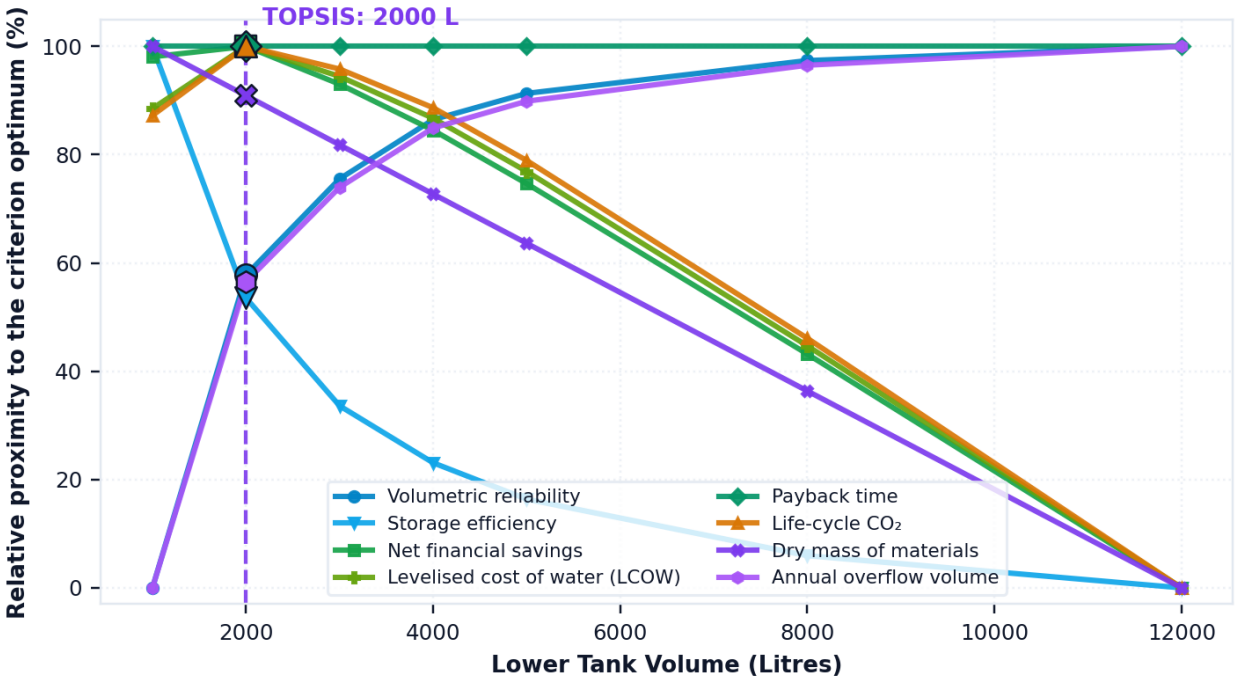


Figure 64 — The second chart of the decision tab: how close each volume comes to the best observed value on each of the eight criteria, with the volume of the highest TOPSIS score marked. It is the figure that shows what a choice gives up, and in which dimension. Figure generated by the program itself.

4.9.4. The tutorial's recommendation

The multi-criteria analysis with eight criteria and equal weights indicates a band of **2,000 to 3,000 L**, with the highest score at 2,000 L. The tutorial keeps the **4,000 L polyethylene** tank, the volume the hydraulic criterion of section 4.4 gave with a marginal-gain threshold of 1 %/m^3, and carries it through sections 4.5 to 4.10. The tutorial's volume lies just outside the band, the two routes do not agree in this project, and the choice deserves a plain account of what it gives up.

Against 2,000 L, the 4,000 L tank gives up money, carbon and lightness: a net saving of −US$ 3,020 instead of −US$ 2,241, an LCOW of US$ 10.24/m^3 instead of US$ 9.43/m^3, a dry mass of 134 kg instead of 90 kg, and a storage efficiency of 4.06% of the volume a day instead of 7.58%. In return it meets 96.76% of the rainwater demand instead of 90.21%, and sends 52.6 m^3 a year to the drain instead of 56.7 m^3. The proximity chart shows the same trade, criterion by criterion.

Under the simulated weight uncertainty (SMAA-VIKOR, with each dimension weighing 25% on average), 2,000 L comes first in 39.6% of the draws, 3,000 L in 25.8% and 4,000 L in 17.7%. By the yardstick of section 3.7, no volume is a robust choice: the answer depends on the weights, and the study must say so.

When the smaller volume is the defensible choice. If cost and carbon lead the decision, or if the dimensions are weighted equally and idle volume counts against the tank, the band of 2,000 to 3,000 L is the answer, and 2,000 L within it: it is the LCOW minimum, the carbon minimum and the smallest financial loss.

When the tutorial's volume is defensible. If the decision weighs the water delivered and the overflow sent to the drainage system above money and mass, 4,000 L enters the band. It has the highest score under a dominant structural weight, with equal weights when the storage-efficiency share is set to zero, and with the objective weights of CRITIC. In all three the band is 3,000 to 4,000 L, and 4,000 L leads 3,000 L by 0.012 of score at most: a tie in practice.

The tutorial keeps 4,000 L so that the following sections build on the volume the hydraulic criterion gave. A real study should choose with its own weights, declare them, and report both results: the volume adopted, with its criterion, and the band the multi-criteria analysis gave, with its tolerance.

4.9.5. The project, closed

Table 138 — Summary of the tutorial project, with all the parameters and results

Triton · single-family house in New York (costs illustrative, not market prices)	
precipitation series	New York, 30 years, 1,125 mm/year
catchment area	150 m²
runoff coefficient	0.85
first flush	2.0 mm, every event
residents	4
total demand	600 L/day
fraction suppliable by rain	28%
lower tank	4,000 L, polyethylene
supply arrangement	pumping to an upper tank
upper tank	1,000 L, 100 L trigger level
quality class	1, tablet chlorination
first-flush chamber	300 L
potable water saving potential	**27.09%**
days of full supply	96.4%
rainwater consumed	59.4 m³/year
pumping energy	7.7 kWh/year
investment (illustrative)	US$ 6,350
net present value over 20 years (illustrative)	**–US$ 3,020**
discounted payback	none
net emissions over 20 years	**–200 kg CO_2e**
carbon payback	12.4 years

One step remains, which is to communicate the result: a study that is not reported in a verifiable way is indistinguishable, for whoever reads it, from a well-presented guess. That is the subject of the next section.

4.10. The report, and what to declare in a paper

> By the end of this section you will have the report issued and, if you intend to publish, the list of what must appear in the method of the paper. That list is the shortest and the most important part of the manual.

4.10.1. The three reports

The program issues three different reports, and the difference is not one of length but of audience and purpose. Choosing the wrong report for the right reader is the most common way of producing a document nobody reads: a client does not go through a life cycle inventory item by item, and a certification assessor is not satisfied with a four-page conclusion.

The **executive report** takes four to six pages and brings together the technical result, the investment, the return and an objective conclusion. It is the document handed to the client, and its virtue is that it fits in a single reading, without requiring the reader to know the method.

The **environmental and ESG report** presents the life cycle inventory broken down by component, the carbon balance over the service life and how the project fits the frameworks dealt with in section 2.9 — LEED, EDGE and GRI 303. It is the document attached to a certification process, and the breakdown by component exists precisely because an assessor checks item by item.

The **research report** has the complete method, the declared assumptions, the series used and the results with the precision a paper requires. It is the basis on which a publication is written, and it is the only one of the three that includes the analytical figures.

Besides the three, step **10. Export** generates the schematic drawing in DXF, the BIM model in JSON and spreadsheets with the complete daily series and with the volume sweep, as section 3.9 details.

4.10.2. What the report does not decide for you

The report carries the numbers; the context that makes them reproducible is yours. No automatically generated document can declare why that precipitation series was chosen, whether the per capita consumption adopted was measured or taken from the literature, or what justifies the service life considered in the environmental assessment. It is that information that allows a third party to repeat the study and reach the same result, and it is what the rest of this section deals with.

4.10.3. The declaration list

A study carried out in Triton that fails to declare any of the items below is not reproducible by third parties and, which is usually worse, is not comparable with another study done in the same program — because two simulations with different assumptions produce numbers that look comparable and are not. The list is organised in the order in which the decisions appear in the work, and can be followed as a script for writing the method.

4.10.3.1. Program and version

- **Triton version**, with the full number, and the **edition** (International). Calculation fixes between versions shift results, and without the declared version there is no way of knowing which calculation produced the published number.

4.10.3.2. Precipitation series

- **Source**: station, reanalysis, or climate model.
- If a reanalysis or a model: **product, scenario and time window**, and the grid resolution.
- **Trimming**: start and end dates, and number of years.
- **Treatment of gaps** and the criterion for dropping an incomplete year.

4.10.3.3. Building and demand

- Catchment area and **how it was obtained** — horizontal projection.
- Runoff coefficient and its origin.
- Per capita consumption and whether it is **measured or a reference value**.
- **Fraction suppliable by rainwater** and the end uses that make it up. It is the ceiling of the result, and without it the potential cannot be interpreted.
- Whether any use is outside the list that the applicable national standard admits, such as the washing machine, and which quality criterion was adopted for it.

4.10.3.4. Supply arrangement

- **Arrangement**: pumping to an upper tank, direct pressurisation or gravity. It defines the energy and the pump sets in the cost and in the carbon.
- With pumping to a tank: tank volume, trigger level and manometric head.
- With direct pressurisation: working pressure and starts per person per day.

4.10.3.5. First flush

- Depth adopted and **mode** among the three.
- **The treatment of the depth**, if the study compares Triton with another tool: some tools treat the depth as an event threshold, Triton subtracts it from the day's rain, and the two give different results.

4.10.3.6. Volume and choice criterion

- If it came from a sweep: **the marginal-gain threshold adopted**. Without it, «ideal volume» means nothing.
- If it came from multi-criteria: **the four dimension weights and the criterion shares** (or the eight criterion weights) and the method, TOPSIS or SMAA-VIKOR.
- If the weights came from **CRITIC**, say so and report the weights it computed, at least summed per dimension: they belong to that set of volumes and do not carry over to another.
- **The choice band and its tolerance**, not a single volume: «volumes from A to B L have similar TOPSIS scores (within 5% of the score range)». The volume with the highest score can follow as information.
- If the volume adopted lies outside the band the multi-criteria analysis gave, **both**: the volume and the band, and the criterion that decided.
- The version of the program: the eight criteria are those of version 0.2.0, and a study made with version 0.1.0 used seven.
- That the TOPSIS normalisation is a **variant** with a shift by `x - min(x)`.

4.10.3.7. Economic analysis

- **City and utility**, with the effective date of the tariff table.
- **Minimum-charge regime** among the six. It is what changes results most between utilities.
- Sewage percentage, and that it applies to the **water part** of the bill.

- Minimum attractive rate of return, inflation, analysis period.
- **Tariff escalations** for water, sewage and energy, with the interval.

4.10.3.8. Life cycle assessment

- **Boundary**: water delivered, not produced.
- **Service life** adopted and its justification.
- **Material** of the tank, and whether the prices are quotations or illustrative. It reverses the sign of the result, as section 4.8 shows.
- Basis of the electricity grid emission factor, **with the year**.
- Which factors are **approximations** and which carry a **screening label**.

4.10.3.9. Certifications

- That quality classes 2 to 4 are **adaptations made by the program**, not by a standard.
- For LEED, the **version** of the framework: v4/v4.1 or v5.
- For EDGE, that the program assesses **only the water bar**, and that the base case used is the declared one or the modelled demand.

4.10.4. The ready-made paragraph

For our project, the method would read like this:

> The simulation was carried out in Triton 0.2.0, International Edition, with a daily-step behavioural model (overflow calculated before the demand is withdrawn, with the day's rain available for the day's consumption, an order between YAS and YBS), on a 30-year ERA5 reanalysis precipitation series for New York (10,958 days, mean of 1,125 mm/year). A catchment area of 150 m^2 in horizontal projection was adopted, with a coefficient of 0.85, a round figure for the combined collection efficiency, and a 2.0 mm first flush on every event, subtracted from the daily depth. The total demand adopted was 600 L/day (4 residents, 150 L/person·day), with a fraction suppliable by rainwater of 28%, corresponding to the toilet and the outdoor uses. The 4,000 L volume resulted from the marginal-gain criterion with a 1 %/m^3 threshold. A TOPSIS multi-criteria analysis with eight criteria in four dimensions (technical, economic, environmental and structural, 25% each, with equal criterion shares), with normalisation in a variant of Hwang and Yoon shifted by x − min(x), gave instead a choice band of 2,000 to 3,000 L (volumes within 5% of the score range from the highest score, at 2,000 L); 4,000 L was kept for its higher volumetric reliability and lower overflow, at a higher levelised cost of water. The points of use are supplied by pumping to a 1,000 L upper tank, with a 100 L trigger level, a 0.5 hp pump, a manometric head of 12 m and the program's default motor efficiency. The economic analysis used the New York City Water Board tariff in force from 1 July 2026 (a single volumetric water rate and sewer at 159% of the water charge), a minimum attractive rate of return of 0.4% per month, inflation of 0.2% per month, escalations of 3% per year at 12-month intervals and a 20-year period; all costs were illustrative round figures, not market prices. The life cycle assessment adopted the boundary of water delivered, illustrative emission factors of 0.40 kg CO_2e/kWh and 0.50 kg CO_2e/m^3, a polyethylene tank and a service life of 20 years.

That is about three hundred and fifty words, and they are the difference between a study another researcher can repeat and a loose number nobody can check. The length is modest compared with what is gained: a method written this way answers in advance most of the questions a reviewer would ask.

4.10.5. The end of the tutorial

Ten sections, a single project followed from start to finish, and a complete study: it started from a house without a system and arrived at a recommendation of volume, material, quality class and a verdict on economic and environmental feasibility — negative on the first, at the illustrative costs, and positive on the second once the material was changed — with each decision justified by the number that supported it. The table of section 4.9 brings together the consolidated result.

The way forward depends on what you intend to do next:

- **Solve a case different from the tutorial** — chapter 3, the task guides.
- **Understand where each number comes from** — chapter 2, the method.
- **Not make the mistakes the program does not prevent** — section 5.1.
- **Defend the study before a reviewer** — chapter 5.

5. Mistakes, limitations and reliability

5.1. Ten mistakes the program does not prevent

> These are not defects of the program. They are **engineering** mistakes it accepts without complaint, because it has no way of knowing. Each one gives the mistake, why it is tempting, what it does to the result, and how to avoid it.

5.1.1. Using the sloping area of the roof

The mistake. Entering the area of the roof surface instead of the horizontal projection.

Why it is tempting. It is the area that appears in the roof tile quantities, and the one the builder knows.

What it does to the result. It overestimates the catchment in the ratio `1 ÷ cos(slope)`. On a roof with a 30% pitch, 4.4% of water that does not exist; at 60%, 16.6%.

How to avoid it. Rainwater harvesting practice takes the catchment area as the horizontal projection. Do not use the contributing area used to size gutters, which adds half the height of the roof and the walls. Rain falls vertically, and what it sees is the shadow of the roof on the ground. If you have the sloping area, multiply it by `cos(slope)`, as in Figure 65.

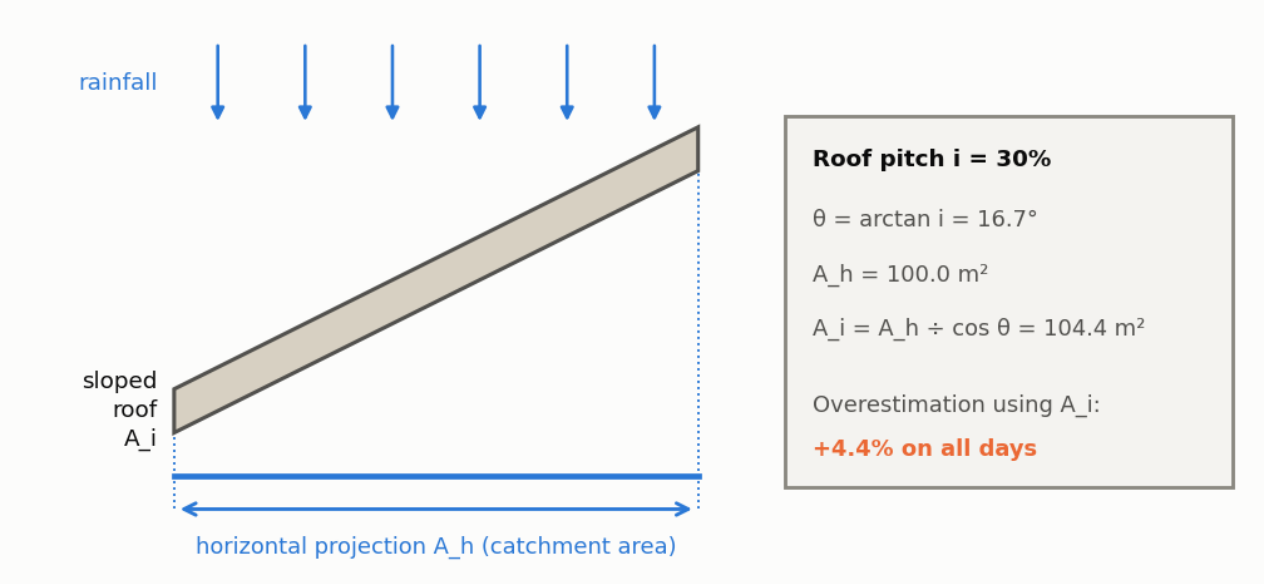


Figure 65 — Catchment area as the horizontal projection of the roof. For a 30% pitch, θ = 16.7° and the sloping area is 4.4% larger than the horizontal projection; using the sloping area overestimates the volume collected in that proportion on every day of the series.

5.1.2. Sizing by the mean monthly rainfall

The mistake. Using the mean monthly precipitation in a spreadsheet calculation, instead of the daily series.

Why it is tempting. The monthly mean is the figure published in the climatological normals, and the spreadsheet fits on one page.

What it does to the result. It systematically overestimates. The mean hides that rain arrives concentrated: a month with 200 mm spread over five events fills the cistern and makes it overflow five times, while the mean calculation assumes a continuous flow the cistern would absorb entirely.

How to avoid it. It is this program's reason for existing. Section 2.1 shows the overflow happening day by day; a calculation by means does not see it.

5.1.3. Confusing the first-flush depth with the volume of the device

The mistake. Entering in the first-flush field the volume of the self-cleaning chamber, in litres.

Why it is tempting. The device is sized in litres, and the field asks for a number.

What it does to the result. The field expects **millimetres**. Entering 300, thinking of the device's 300 litres, produces a first flush of 300 mm — larger than any daily rainfall in the New York series of the tutorial, whose maximum is 128.2 mm. The system collects **practically nothing**.

How to avoid it. `d_f` is a depth. The volume of the device is `A × d_f`: in the tutorial project, 150 m^2 × 2 mm = 300 litres. They are the same decision expressed in two units, and the program wants the first.

5.1.4. Ignoring the minimum-charge regime

The mistake. Building the tariff table with the progressive blocks and forgetting how the utility treats minimum consumption.

Why it is tempting. The blocks are what is published prominently. The minimum-charge regime is in a footnote, when it is there at all.

What it does to the result. Where the tariff has an **allowance within the minimum charge**, saving below the allowance **discounts nothing**. A study that assumes a linear discount produces a payback that does not exist.

How to avoid it. Section 3.3. And the practical test: simulate two consumptions, one inside and one outside the minimum block, and compare them with a real bill of the building.

5.1.5. Simulating a school or hospital with a residential tariff

The mistake. Using the residential tariff of the catalogue for a non-residential building.

Why it is tempting. The residential structure is the one at hand, and the program does not prevent its use for another building type.

What it does to the result. It underestimates the saving. Non-residential categories are usually more expensive than the residential one.

How to avoid it. The program **warns** when the building type is not residential, and states the direction of the error. The International Edition has no tariff catalogue: the tariff is always typed in, so type the structure of the building's category. Section 3.5 deals with the subject.

5.1.6. Expecting the upper tank to increase the saving

The mistake. Adopting the elevated tank expecting more water.

Why it is tempting. It is a common arrangement, and «more storage» sounds like «more water».

What it does to the result. With the same total storage, the arrangement with an elevated tank delivers **less**: the cistern overflows while the tank above still has room, because pumping only happens when there is consumption. In the tutorial, 0.15 percentage point less (27.09% against 27.24% for a single 5,000 L tank), plus 7.7 kWh a year of energy.

How to avoid it. Decide on the tank by a **hydraulic** criterion — gravity pressure, a reserve against power cuts — not a water-saving one. Section 4.5 makes the fair comparison.

5.1.7. Adopting too short a series

The mistake. Simulating with two or three years of series.

Why it is tempting. It is what can be obtained quickly from a nearby station.

What it does to the result. Two effects added together. The **empty-tank bias**, because the simulation starts with the cistern dry and the first months penalise the result; and the **dependence on the stretch**, because a short series may fall in an atypically dry or wet period.

How to avoid it. Thirty years is comfortable, ten is the minimum defensible. Below that, declare the limitation and show the result as a range.

5.1.8. Choosing the quality class by cost

The mistake. Adopting class 1 because it is the cheapest, for a use that would require more.

Why it is tempting. The program allows it, and the cost difference is visible immediately.

What it does to the result. It does not change the number; it changes the **validity** of the project. A system feeding a washing machine with water treated to the normative minimum is a quality decision, not a budget one.

How to avoid it. Choose by the **requirement of the use**. And remember that classes 2 to 4 are adaptations of the program, not requirements of a standard: use them as a declared criterion, not as a standard.

5.1.9. Comparing with another tool without declaring the method

The mistake. Presenting the results of two rainwater programs side by side as if they were comparable.

Why it is tempting. Both simulate the same tank with the same equations of balance.

What it does to the result. Tools differ in modelling decisions that move the number: whether the first flush is subtracted from the day's rain or acts as an event threshold, how the ideal volume is chosen, which operating rule is applied. A gap of a few percentage points can come from any of them, and none is an error.

How to avoid it. Declare the divergence, and compare with a first flush of zero, where the two first-flush rules coincide. Sections 3.8 and 6.1 go into detail.

5.1.10. Publishing the volume with the highest saving as the recommendation

The mistake. Choosing from the sweep the volume with the highest potential.

Why it is tempting. It is the column rainwater harvesting studies report, and more is better.

What it does to the result. In the tutorial, 20,000 L give the highest potential, 27.98%, which 16,000 L already gave. They also cost **3.9 times more** than the 4,000 L (illustrative, not a market price: US$ 8,600 against US$ 2,200) and carry **4.1 times more embodied carbon** (3,546 against 858 kg CO_2e), to deliver 1.15 percentage points more. And, in concrete, the larger volume is environmentally **worse** in absolute terms.

How to avoid it. Declare the selection criterion. If it is hydraulic, the marginal-gain threshold; if it is multi-criteria, the four dimension weights and the criterion shares. And report the winners of each criterion alone, because the divergence between them **is** the result.

5.1.11. The underlying mistake

The ten above have a common root: **treating the program as a calculator instead of a model**.

A calculator receives numbers and returns numbers. A model receives assumptions and returns the consequences of those assumptions. Every Triton result is conditional on what was declared, and the quality of the study lies in the quality and explicitness of those declarations.

That is why section 4.10 gives the list of what to declare, and why section 5.2 gives the known limitations. A study that does not declare its assumptions is not reproducible, however correct the calculation.

5.2. Known limitations

> Where the program does not serve, and why. A program that declares its own limits is more trustworthy than one that seems to serve for everything, because the second leaves users to discover them for themselves.

This section derives from the issue register the research group keeps, and reflects the state of the current beta version, 0.2.0. A limitation leaves this list when it is actually resolved, not when it stops being mentioned — a distinction that seems obvious and that the documentation of scientific programs often does not observe.

The limitations are grouped by origin, because the remedy each group admits is different. Those of the model follow from representation choices and only change with a revision of the model itself. Those of the data depend on surveying, and can be supplied by the user. The methodological ones are declared departures from a reference formulation. And those of implementation are pending work, with no conceptual obstacle.

5.2.1. Limitations of the model

There is no hourly sub-step. A 40 mm rain concentrated in two hours and the same depth spread over twenty-four hours produce the same result. For tanks very small relative to the catchment area, this underestimates the overflow.

There are no losses in the tank. Evaporation and leakage are not modelled.

The initial condition is an empty tank. In series of less than a year, this penalises the result noticeably.

The runoff coefficient is single and constant. It does not vary with rainfall intensity or with the time since the last event, when in reality the first event after a dry spell has a lower coefficient.

The first flush is a depth, not a device. The program calculates the volume and cost of the device, `A × d_f`, but not its hydraulic arrangement, which requires a design of its own.

5.2.2. Limitations of the tariff data

The International Edition has no tariff catalogue: the tariff is typed in, and its accuracy is the user's.

One structure is entered at a time. A study of a school, shop or factory calculates the saving with whatever structure was typed in. If that is the residential one, the saving is usually **underestimated**, because non-residential categories tend to be dearer. The error is conservative and its direction is known, but it must be declared. The program warns when the building type is not residential; the structure of the right category is then entered as described in section 3.3.

Sewerage charges are approximated. Sewerage billed by blocks of its own is represented by a single percentage of the water bill, or by a fixed value or a price per cubic metre. It is a declared approximation.

No social tariff and no seasonal or scarcity surcharges. A low-income class, a drought surcharge or a seasonal price are not modelled unless the user folds them into the structure entered. For a study of social housing the difference can invert the conclusion.

5.2.3. Limitations of the life cycle assessment

It is a screening assessment, not an inventory conforming to ISO 14040.

A single impact category. Carbon only. There is no eutrophication, acidification, land use or toxicity.

The manufacturing emission of the pump set is an approximation by mass. The program multiplies the catalogue mass of each power rating by the intensity per kilogram of an environmental product declaration of a pump of another class. The order of magnitude is defensible; the value for each power rating is not a measurement.

Direct pressurisation is modelled by mean values. The energy uses a single working pressure, the mean of the pressure switch range, and not the on-off cycle of each use; and no start-up energy or standby consumption is added, which a pressure pump with a variable-frequency drive would have. Old projects without an upper tank open with the arrangement «not stated» and receive no energy until one is chosen.

There is no end of life. Neither credit for recycling nor burden for disposal.

There is no maintenance. Component replacements over the service life do not enter.

5.2.4. Limitations of water quality

Classes 2 to 4 are adaptations of the program, not classes of a standard. The matrix of parameters by use is an internal convention; declare it as such.

The constants of the roof wash-off model are not calibrated. The resulting water quality is an **assumption**, not a measurement. The program does not replace laboratory testing.

5.2.5. Declared methodological limitations

The R95p percentile is calculated over the whole series, not over the fixed ETCCDI base period 1961–1990. Series of different lengths are not directly comparable on this index.

Opricovic's conditions C1 and C2 are not implemented in VIKOR. The compromise solution should be read with the weight sensitivity analysis alongside.

The TOPSIS normalisation is a variant with translation by `x - min(x)`, to admit a negative net present value.

The dry mass in the multi-criteria decision uses the default configuration of the weight calculator when the volumes are compared: the cistern of each volume, its fittings and the pump. The upper tank and the pipes, the same for every volume, would add the same mass to each and do not change the ranking, but they are not in the criterion value. The full weight of the project is in the `system_weight` block of `analyze`.

The structural warnings are attention thresholds of the program, not limits of any standard: 500 kg on the roof with the upper tank full, an upper tank above 1,500 L, a cistern above 3,000 kg dry, and any concrete cistern. They ask for a check by the structural or foundation design; they do not replace it.

The tariff adjustment is a single percentage over the whole analysis period, which makes the twenty-year projection fragile. It is the assumption that most moves the economic result.

5.2.6. Limitations of implementation

Six fields are saved in the file and never read. Among them the **installation month**, so the cash flow always starts in month 1.

The pump start-up time, of 108 s per start, represents the priming time of a pump whose suction line has drained, and is applied to **every** start. It is conservative.

There is no option to treat the first flush as an event threshold, as some other tools do. To compare with such a tool, use a first flush of zero, where the two rules coincide, or the series transformation of section 6.1.

5.2.7. What to do with this list

In a published work, cite the limitations that affect your case — not all of them, which would turn the method section into a defensive list, but those that actually bear on the conclusions presented. A declared limitation is a caveat; an omitted limitation, when discovered, is an error.

Three examples guide the selection. A study of a school needs to cite the tariff category issue, because it shifts the whole economic result. A study of environmental performance needs to cite the single impact category and the approximation by mass of the pump set emission factor. And a study of social housing needs to cite the absence of a social tariff, which in that context can invert the conclusion.

A reviewer who finds one of these limitations left unsaid is entirely right to raise it, and raising it usually costs more time than declaring it would have cost.

5.3. How the program is verified

> This section describes Triton's verification suite, so that a reviewer has what they need to judge how far a result produced by the program can be trusted.

A scientific program whose verification is not declared is like a claim without evidence: it may be right, but whoever uses it has no way of knowing, and whoever reviews work done with it has no way of judging. This section is the evidence behind the numbers presented in the rest of the manual, and it was written to be read by those who need to decide whether to trust them.

5.3.1. The suite

The program's verification consists of more than a thousand automated tests, organised into five complementary families (Figure 66): unit tests, invariant tests, integration tests, graphical interface tests and benchmark tests against independent reference results. The separation is not merely organisational: each family catches a distinct class of defect, and the absence of any of them would leave a flank exposed.

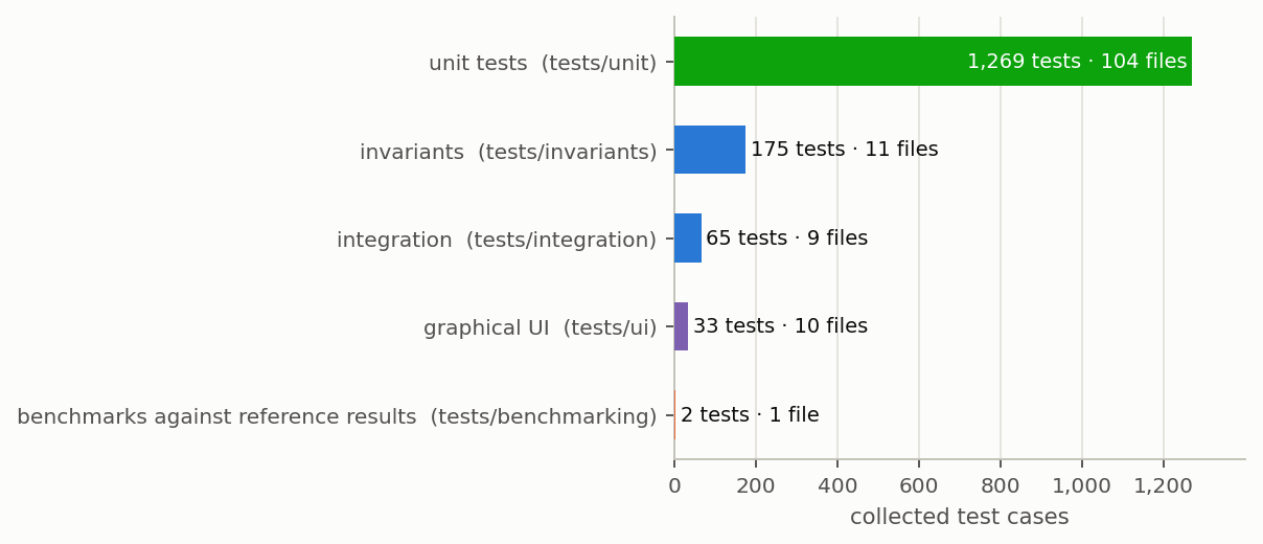


Figure 66 — Number of tests and of files in each family of the verification suite, as collected in this version. Unit tests account for more than four fifths of the total, because they run fast and locate the error close to its origin.

The whole suite runs at every change to the code, and no change is merged while a test is failing. That discipline is what allows us to say that a fixed defect does not come back: the fix comes with the test that watches over it.

The verification layers of the program form a hierarchy, and each one catches a kind of error the others would not reach. A unit test does not detect a model error, because it checks the function against what is expected of it; and a manual check, which would detect that error, does not cover a thousand input combinations (Figure 67).

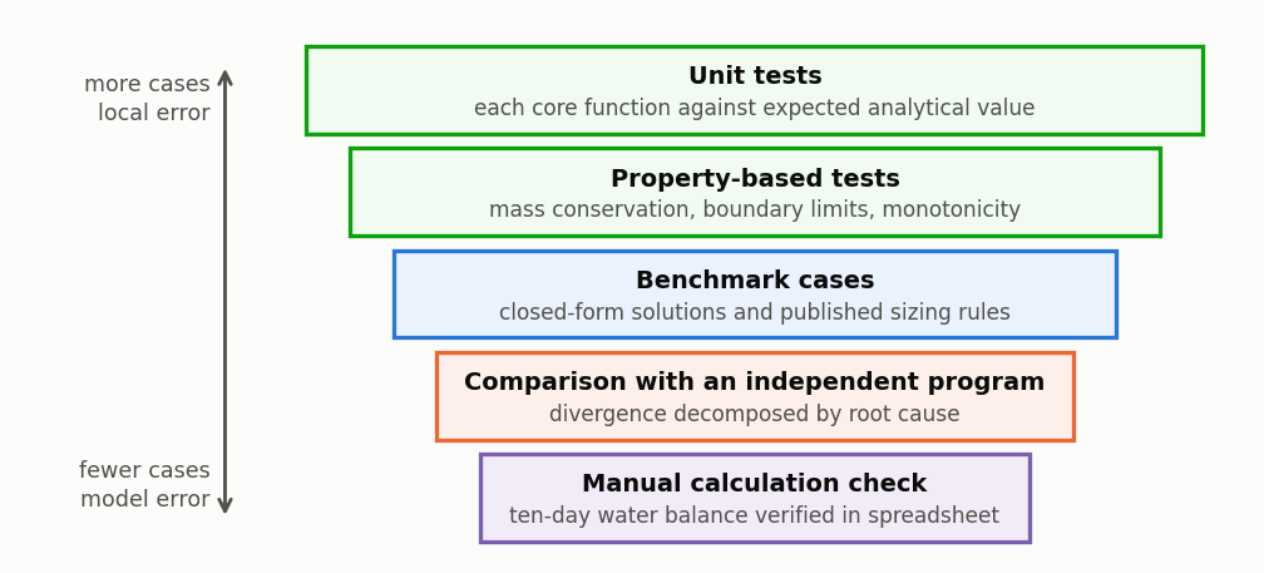


Figure 67 — The five verification layers of the program, from the unit tests, numerous and aimed at local errors, to the manual check, occasional and aimed at model errors. No layer replaces another: it is the overlap of the five that supports the published result.

5.3.2. The invariants

The invariants are the most important family of the suite, and the reason lies in the nature of what they check. A value test checks whether the program produces a specific number for a specific input; an invariant checks whether a **property** holds for any admissible input. The first detects that a calculation has changed; the second detects that the model is no longer physically consistent.

Mass conservation requires that, over ten-year series, the volume collected equals the sum of the volume overflowed, consumed and left in storage. The residual measured is of the order of 10^{-14} per cent of the volume collected, that is, the rounding error of floating-point arithmetic itself. **Closure of the demand balance** does the same on the consumption side: the total demand must be exactly the sum of three parts, which are the rainwater consumed, the potable water bought and the unmet demand.

The **range of the potential** checks that the saving potential stays between zero and one hundred per cent for every combination of volume, runoff coefficient and area, which is checked over sixty combinations. The **ceiling of the suppliable fraction** is more specific and more revealing: the potential can never exceed the fraction of the demand rain can supply, and the check extends to volumes of one hundred cubic metres, far beyond any plausible building application.

Parity between engines compares the compiled core with the reference loop and requires both to return the same number, for single and double tanks, with and without the irrigation backup supply, within a tolerance of 10^{-9}. **Monotonicity**, finally, requires that more volume never reduces the potential and that more demand never increases it — two properties any correct implementation satisfies and a defective implementation violates conspicuously.

5.3.3. Analytical cases

A separate set gathers **closed-form** cases, that is, situations in which the correct result is known by deduction, with no need to simulate: constant rain, constant demand, a tank of infinite capacity and a tank of zero capacity. They are the strongest test available, because they do not depend on any reference value produced by the program itself. A test that compares today's output with yesterday's detects a regression, but perpetuates an error that already existed in both; an analytical case cannot do that.

5.3.4. Path tests

This family was born from the most persistent defect this program has shown over its history: a value calculated correctly that does not reach whoever should consume it. It is a class of error that escapes formula tests entirely, because each part on its own is correct — the source calculates well, the destination would calculate well if it received the value, and what fails is the stretch between the two. Only a path test catches it: change the input on the screen and check that the final result actually moves.

Five real defects found by this family, and now watched by it, illustrate the pattern: the choice of disinfection technology did not reach the life cycle assessment; unticking the polishing filter had no effect in classes 2 to 4; the four tax fields were zeroed by the screen itself when it was closed; the irrigation backup supply option did not reach the compiled cores; and thirty of the eighty-seven fields of the time did not survive saving and reopening the project.

5.3.5. The numbers of the manual

With the writing of this manual a verification family of its own was created, meant to keep the document and the program from diverging: **each printed value has a matching assertion**. The numbers of section 2.1, those of the whole tutorial (New York) and each row of the ten-day table are covered, as is the requirement that certain sections declare certain caveats. When the program changes, the test fails and points to the page to correct.

It is the mechanism that keeps a whole manual from ageing silently, which is the usual fate of the documentation of scientific programs.

5.3.6. Verification against independent references

The verification extends to results the program did not produce: the analytical cases above and benchmark comparisons against independent reference calculations. Section 6.1 presents that comparison and what it can and cannot show.

5.3.7. What the verification does not prove

The distinction between verification and validation is demanded by any competent reviewer, and rightly so, because the two answer different questions and only one of them is within the reach of a test suite.

Verification answers whether the program correctly solves the equations it implements, and that is exactly what the suite described in this section tests. **Validation** answers whether the equations implemented adequately represent physical reality, and that requires field measurement: systems installed, monitored over time and compared with what the simulation predicted.

Triton is verified. The validation of the daily behavioural model rests on the literature of the field, not on measurement of its own carried out by the group that develops the program. A study that presented the program's results as if they were measurements would be making a methodological error.

5.3.8. The verification report in the interface

The **Help → Verification Report** menu opens, inside the program, the verification report of the version: the distinction between verification and validation, the kernels exercised, the invariants, the analytical cases and the benchmark comparison. It is the reference to cite when a study needs to declare how the program was verified.

5.3.9. Who runs the suite, and when

The suite comes with the program's source code, not with the installation: it is run by the research group at every change, before any version is released. What this means for those using the installed program is that the version on their machine has passed the tests described here, including those that check each number printed in this manual.

> **IN DEPTH · CHECKING FOR YOURSELF**
> The source code is public, under an academic source-available licence (non-commercial use; `LICENSE.md`), and the suite runs with a single command in the development environment. A reviewer who wants to check the invariants — mass closure, monotonicity, parity between the two calculation engines — finds the test files organised by subject, and appendix B links each process of the program to what verifies it.

6. Fixes, bugs and versioning

6.1. Verification against analytical solutions and benchmarks

> This section shows how the engine is checked against results it did not produce: closed-form solutions, a hand-checkable case, published sizing rules and independent programs, and what each check can and cannot prove.

6.1.1. The role of the comparison

A comparison with another tool is not a fidelity target. Two programs that agree to the last decimal may share the same mistake; two programs that differ may differ for good reasons. What a comparison offers is an independent set of results, produced by another hand, and the chance to explain every difference by a cause. Without an external reference of this kind, verification would be limited to the internal properties of section 5.3 — necessary, and unable to detect a systematic error that respected them all.

The checks below run from the strongest to the weakest. The strongest need no reference program at all.

6.1.2. Closed-form solutions

In a few situations the correct answer follows from the equations, with no simulation. Constant rain and constant demand give a tank that fills to a known level; a tank of zero capacity can supply only what falls on the day; a tank of unlimited capacity supplies the demand whenever the mean supply exceeds it, and the potential is then the whole of the suppliable fraction. The suite asserts each of these within numerical tolerance. Because the expected value comes from deduction, not from an earlier run of the program, an error cannot hide in both.

6.1.3. A case you can check by hand

The ten-day case of section 2.1 is small enough to follow with pencil and paper: 100 m^2, runoff coefficient 0.85, first flush 2.0 mm, 2,000 L tank, 80 L/day of rainwater demand, and the New York rain of 21 to 30 September 2018. The program reports 8,483 L collected, of which 6,209 L overflow, 514 L are consumed and 1,760 L remain in the tank. The three outputs sum to the input exactly (8,483 − 6,209 − 514 = 1,760), and the residual of the balance is zero. Repeating two days by hand — the 59.8 mm day that overflows the tank, the 1.9 mm day that falls under the first flush and collects nothing — is the quickest way to learn what the program does with each rule.

6.1.4. Published sizing rules as benchmarks

Sizing rules of thumb are not exact, but they bracket the answer. The tutorial house (150 m^2, 600 L/day, 28% suppliable) was sized by five methods, and each volume was then run through the daily simulation to obtain the potential it actually delivers.

- practical rule of 6% of annual demand: 3,750 L, potential 26.66%;
- daily simulation with a marginal-gain criterion: 4,000 L, potential 26.83%;
- monthly Rippl diagram: 5,750 L, potential 27.43%;
- daily Rippl diagram: 8,000 L, potential 27.74%;
- practical rule of 0.05 times rainfall times area: 8,500 L, potential 27.78%.

The methods disagree by a factor above two in volume and by 1.1 percentage points in potential. The spread is the useful result: beyond about 4,000 L, the curve of section 4.4 is flat, and every rule lands on it. A rule that gives a volume far outside this range for the same inputs deserves a second look.

6.1.5. Comparing with another program

Comparing with an independent tool answers a different question: do two implementations of the same conceptual model agree? Agreement is expected only when the modelling decisions agree. Two differ often enough to matter.

The first is the **first flush**. Subtracting the depth from the day's rain, as Triton does, is physically faithful, because the diverted water never reaches the cistern. Some tools instead treat the depth as an event threshold: below it nothing is collected, above it the whole rain is. The second is the **volume criterion**: tools choose the ideal volume by marginal gain on different grids, and so elect different volumes. Comparing optima therefore mixes the difference in criterion with the difference in engine; compare potentials at the **same** volume.

6.1.5.1. Emulating a threshold rule without changing the engine

The old rule is emulated by transforming the input rainfall series, not by changing the water balance code. Measuring a divergence with modified code would verify a program that is not the one distributed to the user.

$$P' = P + d_\mathrm{f} \text{ if } P \geq d_\mathrm{f};\ P' = 0 \text{ otherwise} \tag{57}$$

Table 139 — Variables of Equation 57

Symbol	Meaning	Unit
`P'`	transformed precipitation, to be supplied to Triton	mm
`P`	precipitation observed on the day	mm
`d_f`	first-flush depth	mm

With this transformation applied, the Triton calculation `P_ef = max(0, P' - d_f)` reproduces the threshold semantics exactly. The program has no option that does this automatically; use the series transformation, or compare with a first flush of zero, where the two rules coincide.

Figure 68 illustrates how a total divergence between two programs is broken down by cause, down to a residual.

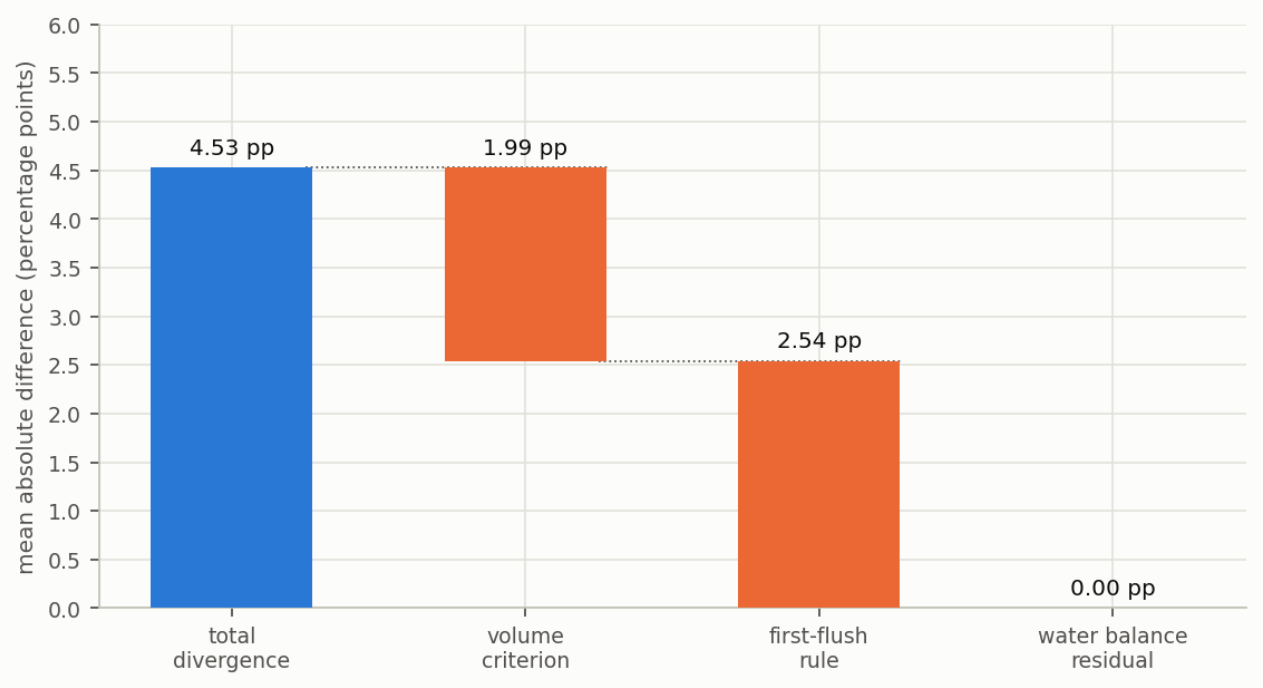


Figure 68 — Breakdown of the mean divergence between the program and an independent reference. The first bar is the total observed; the intermediate bars are declared differences of method, such as the criterion for the optimal volume and the first-flush treatment; the last is the residual of the water balance, which is the number that actually verifies the engine.

6.1.6. Reference rows with a null result

Reference tools sometimes export zero where Triton calculates a positive value, typically because the tool did not find an optimal volume under its own criterion. Such rows point to a feature of the **reference data**, not to an error of the program. Keep them apart from the statistics, so as not to let them dominate the mean.

6.1.7. What to declare in a comparative study

- the **two numbers**: the total divergence and the residual after the breakdown;
- the deliberate differences of method, named;
- whether the comparison used a zero first flush, threshold emulation, or no neutralisation;
- the version of each program.

Presenting only the total divergence, without breaking it down, suggests an engine error that may not exist.

6.2. Error messages and what to do

> What each message means, what triggered it, and how to resolve it.

The program follows a deliberate policy towards impossible inputs: it rejects them instead of silently correcting them. The reason is that a negative catchment area is not a user preference to be accommodated, but a typing error that needs to be seen by whoever made it. Silently correcting it would produce a plausible result from a wrong input, which is the worst possible combination in a simulation program.

> **The messages of the calculation core are in Portuguese.** The interface is translated, but the checks that run inside the calculation raise their messages in the language they were written in. The tables below quote each message as the program prints it, in Portuguese, followed by its meaning in English in brackets, so that you can recognise it on the screen.

6.2.1. Physical validation of the input

The messages below are raised before any calculation starts, and all of them name the field responsible and the value received, so that the correction does not require a search.

Table 140 — Physical input validation messages and the action for each one

Message	What triggered it	What to do
«Volume do reservatório inferior negativo» (negative lower tank volume)	volume below zero	correct it; **zero is valid** and represents the no-system scenario
«Volume do reservatório superior negativo» (negative upper tank volume)	likewise, in the elevated tank	correct it; zero means no upper tank
«Área de captação negativa» (negative catchment area)	area below zero	correct it; use the horizontal projection in m²
«Coeficiente de escoamento fora de [0, 1]» (runoff coefficient outside [0, 1])	negative coefficient or above 1	above 1 the roof would deliver more water than the rain brings; usual roofs are between 0.80 and 0.95
«Lâmina de descarte negativa» (negative first-flush depth)	first flush below zero	the first flush removes water from the catchment, it does not add any
«Demanda diária negativa» (negative daily demand)	demand below zero	correct it
«Fração atendível por água pluvial fora de [0, 1]» (rainwater-suppliable fraction outside [0, 1])	fraction above 1	enter 0.4 for 40%, not 40
«… não é um número finito» (… is not a finite number)	field that reached the calculation empty, as text or infinite	fill in the named field with a number
«Modo de descarte desconhecido» (unknown first-flush mode)	mode other than 1, 2 or 3	choose one of the three modes; for no first flush, enter a depth of zero
«Intervalo de descarte inválido» (invalid first-flush interval)	mode 3 with an interval below 1 day	enter the interval in whole days
«Nível de acionamento da motobomba negativo» (negative pump start level)	level below zero	correct it; zero means starting with the tank empty

> The suppliable fraction is the most frequent message, and the rule that avoids it is a single one: where you type, a percentage from 0 to 100; where it is stored, a fraction from 0 to 1. Section 4.2 justifies the split. When the message appears, the value arrived as 40 in a place that stores 0.4 — typically a hand-edited parameter file or an automation call.

Table 141 — Suppliable fraction messages and the action for each one

Message	What triggered it	What to do
«… parece estar em percentual» (… seems to be a percentage)	fraction between 1 and 100 in the file, in the weekly, monthly or daily vector, or in automation	enter 0.4 for 40%
«… fora de [0, 100]» (… outside [0, 100])	negative percentage or above 100 on the screen, in the scenario table, in the spreadsheet or in `--share`	correct it; 40 means 40%
orange field, or the question «Simulate anyway?»	percentage between 0 and 1	if you meant 40%, type 40; if you really meant less than 1%, confirm

6.2.2. Precipitation series

The program does not distinguish a dry day from a day without a record, and so it does not guess: a gap in the series stops the calculation, saying where it is. Filling the gap, or trimming the series to a period without gaps, is a decision for whoever conducts the study, and the decision must be stated in the study.

Table 142 — Precipitation series error messages and the action for each one

Message	Cause	What to do
«A série de precipitação está vazia» (the precipitation series is empty)	file with no numeric line	check that the file has a column of daily values, one per line
«… dia(s) sem valor numérico, o primeiro no dia N» (… day(s) without a numeric value, the first on day N)	record gap: empty line or text in the middle of the series	fill the gaps or trim the series, and declare the treatment
«… valor(es) negativo(s), o primeiro de X mm no dia N» (… negative value(s), the first of X mm on day N)	missing-data sentinel, such as −999	treat it as a gap: fill or trim

A header line before the data, such as «Date;Precipitation», is not an error: it is ignored and reading starts at the first numeric line.

6.2.3. Sweep

Table 143 — Volume sweep error messages

Message	Cause	Solution
«O volume máximo da varredura deve ser finito e não negativo» (the maximum sweep volume must be finite and non-negative)	empty or negative field	enter the maximum volume in litres
«O passo de varredura deve ser finito e maior que zero» (the sweep step must be finite and greater than zero)	step zero or empty	enter the step; it will be rounded to the multiple of 250 L

There is also a warning that is not an error and should not be mistaken for one: when the sweep step is adjusted to the multiple of 250 L, or when the limit of forty volumes forces it to be widened, the program

records the adjustment and carries on normally. All that warning requires of the user is to declare in the study the step actually used, not the step originally requested.

6.2.4. Chlorination

Table 144 — Chlorination parameter error messages

Message	Cause	Solution
«Pureza deve ficar em (0, 1]» (purity must be in (0, 1])	purity entered as a percentage	enter 0.65 for 65%, not 65
«A dose não pode ser negativa» (the dose cannot be negative)	dose below zero	correct it
«O fator de emissão não pode ser negativo» (the emission factor cannot be negative)	emission factor of the product below zero	correct it; the factor is per kilogram of commercial product

6.2.5. Economic analysis

Table 145 — Economic analysis error messages and the action for each one

Message	Cause	Solution
«… deve ser um número finito e não negativo» (… must be a finite, non-negative number)	investment, tariff, cost, power or volume empty, negative or infinite	the message names the field; fill it in with a number equal to or greater than zero
«O período de análise deve ser um número inteiro de anos» (the analysis period must be a whole number of years)	fractional, zero or negative period	enter the period in whole years
«… deve ser um número finito e maior que -100%» (… must be a finite number greater than −100%)	adjustment, inflation or discount rate of −100% or less	check the sign of the rate
«… parece estar em percentual» (… seems to be a percentage)	annual rate entered as 5 in a function expecting a decimal fraction	enter 0.05 for 5%

> **Unit of the rates.** In the interface and in the project file, every rate is entered as a percentage, with the unit next to the field: the minimum attractive rate of return and inflation in % per month (p.m.) or in % per year (p.a.), according to the button beside them, and the tariff adjustments in % per adjustment period, whose length in months is in the neighbouring field. The project stores the minimum attractive rate and inflation in % per month. The conversion between month and year is compound, (1 + i)^12 − 1, not a multiplication by twelve: 1% a month is equivalent to 12.68% a year. In automation, the annual calculation functions receive the rates as a decimal fraction, 0.05 for 5%, and reject a value that looks like a percentage instead of reinterpreting it.

6.2.6. Multi-criteria decision

Table 146 — Multi-criteria decision error messages and the action for each one

Message	Cause	Solution
«Informe 4 pesos de eixo (técnico, econômico, ambiental, estrutural) ou 8 pesos de critério TOPSIS» (enter 4 dimension weights (technical, economic, environmental, structural) or 8 TOPSIS criterion weights)	number of weights other than 3, 4, 7 or 8	enter one weight per dimension or one per criterion; three weights from a project of version 0.1.0 are still accepted, and the structural dimension receives their mean
«O multicritério da versão 0.2.0 tem oito critérios em quatro eixos, e os sete valores do modelo anterior não correspondem a eles. Informe quatro pesos de eixo (técnico, econômico, ambiental, estrutural) ou oito pesos de critério.» (the multi-criteria analysis of version 0.2.0 has eight criteria in four dimensions, and the seven values of the previous model do not correspond to them; enter four dimension weights or eight criterion weights)	seven weights or seven criterion shares, from the model of version 0.1.0	rewrite the weights as four dimension weights or eight criterion weights (section 2.10); to reproduce a study made with version 0.1.0, use version 0.1.0
«Informe 4 pesos de eixo (técnico, econômico, ambiental, estrutural).» (enter 4 dimension weights)	dimension weights of the wrong length where only dimension weights are accepted	enter four values
«Os pesos TOPSIS devem ser finitos e não negativos» (TOPSIS weights must be finite and non-negative)	empty or negative weight	correct it; a weight of zero is valid and excludes the criterion
«Ao menos um peso TOPSIS deve ser maior que zero» (at least one TOPSIS weight must be greater than zero)	all weights zero	give weight to at least one criterion
«Informe 8 partes, uma por critério TOPSIS (na ordem dos critérios).» (enter 8 shares, one per TOPSIS criterion, in the order of the criteria)	criterion shares with a number of values other than eight	enter eight shares in the order reliability, efficiency, net saving, LCOW, payback, CO_2, mass, overflow; the default is 1,1,1,1,1,1,1,1
«As partes no eixo devem ser finitas e não negativas.» (criterion shares must be finite and non-negative)	empty or negative share	correct it; a share of zero is valid and removes the criterion from the calculation
«Ao menos um critério do eixo … deve ter parte maior que zero.» (at least one criterion of the … dimension must have a share greater than zero)	every criterion of a dimension with a share of zero	give a share to at least one criterion of the dimension named, or set the weight of that dimension to zero instead
«analysis.topsis_weights deve ser uma lista com quatro valores (eixos) ou oito (critérios), ou «critic»» (analysis.topsis_weights must be a list of four values, dimensions, or eight, criteria, or «critic»)	weights of the wrong length in the project file read by the command line	correct the list in the project file, or write `"critic"` for objective weights
«analysis.topsis_criterion_shares: …»	invalid criterion shares in the project file; the message continues with one of the share messages above	correct the list of eight shares in the project file
«Pesos «X» desconhecidos: use números ou «critic».» (weights «X» unknown: use numbers or «critic»)	a word other than `critic` where the weights go, in automation or in a file	write the weights as numbers, or `critic` for the objective weights of section 2.10

Message	Cause	Solution
«Use quatro pesos de eixo (técnico, econômico, ambiental, estrutural), oito de critério ou «critic» (pesos objetivos calculados dos resultados); os números, não negativos e separados por vírgula, com soma positiva. Os sete pesos do modelo anterior à 0.2.0 não valem mais.» (use four dimension weights, eight criterion weights or «critic», objective weights computed from the results; the numbers non-negative, separated by commas, with a positive sum; the seven weights of the model before 0.2.0 are no longer valid)	`--weights` on the command line with the wrong number of values, a negative or non-numeric value, or a zero sum	give four or eight non-negative numbers separated by commas, or `critic`
«A tolerância da faixa de escolha deve ficar entre 0 e 1 (fração da amplitude dos escores).» (the tolerance of the choice band must lie between 0 and 1, a fraction of the score range)	`--score-band` or `analysis.topsis_score_band` below 0 or above 1; in the project file the message is preceded by «analysis.topsis_score_band:»	give a fraction, such as `0.05` for 5% of the score range
«O critério TOPSIS … da alternativa N não é finito» (TOPSIS criterion … of alternative N is not finite)	undefined indicator in an alternative, typically a payback with no return	check the alternative indicated before deciding

The declarative study (section 3.6) reports its own errors in English: `analise.pesos` must be four non-negative numbers (technical, economic, environmental, structural), eight (one per criterion) or «critic», with a positive sum; `analise.partes_no_eixo` must be eight shares that pass the checks above; and `analise.tolerancia_faixa` must be a number from 0 to 1.

6.2.7. Pump set

Table 147 — Pump set parameter error messages

Message	Cause	Solution
«Rendimento deve ficar em (0, 1]» (efficiency must be in (0, 1])	efficiency as a percentage in the core	use 0.55 for 55%
«Rendimento do motor deve ficar em (0, 1]» (motor efficiency must be in (0, 1])	likewise, in the motor field	leave it blank for the program to adopt its default efficiency table

6.2.8. Files

Table 148 — Error situations when reading and saving files

Situation	What happens	What to do
unreadable rainfall series	reading stops with a message	check the format: one reading per line, in mm, single column
`.triton` file with invalid JSON	opening stops	the file may be truncated; use the backup copy
section missing in the file	the fields fall back to the class default	expected when opening a file from an earlier version; review the corresponding tab
no climate database in this edition	the tab offers only a file of your own	supply the series as described in section 1.2

6.2.9. Warnings that do not stop the calculation

The warnings gathered in this table do not prevent the calculation and do not indicate a defect: they are remarks the program makes about the conditions under which the result was produced. All of them need to be carried over into the text of the study, because all of them affect the interpretation of the number and none of them is evident in the result on its own.

Table 149 — Warnings that do not stop the calculation and must be stated in the study

Warning	What it means
non-residential building type with a residential tariff	the economic result is **underestimated**; see section 3.5
the target class recommends fine filtration and it was declined	decision recorded in the report
emission factor with a screening label	the factor has no primary source; declare it
incomplete tariff structure	the structure typed in has a gap; check it against the published tariff
sweep step adjusted	the effective step differs from the one requested
price extrapolation with low R^2	the volume is outside the price table and the regression is not reliable

6.2.10. When the result looks wrong

Before suspecting a defect in the program, three checks resolve most of the cases in which the result is surprising, and each one corresponds to an input error with a signature of its own.

When the **potential comes out higher than expected**, the immediate suspect is the suppliable fraction: it is the ceiling of the whole result, and a too generous fraction inflates everything that comes after without anything in the report revealing the origin.

When the **potential comes out much lower**, check the first-flush depth. The corresponding mistake is described in section 5.1.3, and consists in entering the first flush in litres when the field asks for millimetres — which discards, typically, the whole rain of every day.

When the **payback comes out absurd**, in either direction, check the tariff regime (allowance, minimum charge, availability charge). It is the most frequent cause of an implausible economic result, and section 3.3 gives the test that identifies it in two minutes.

It is also worth going through the four input steps before accepting any result. The sidebar marks those still pending, and checking four screens takes less time than discovering the mistake after the report has been issued.

6.3. Version history and what changed

This section records what changed between versions of the program and, above all, **which changes alter results already published**. The distinction matters more than it seems: a fix to the interface affects no earlier study, whereas a fix to a calculation can shift every number of a paper already submitted. Anyone who has published with Triton needs to know into which category each change falls, and that is why the history below separates the two explicitly.

The rule guiding this whole section is simple: a calculation fix obliges you to declare the version used; an interface fix does not.

6.3.1. The version you are using

The version number appears in the sidebar, in the footer and in the **About Triton** menu. It is also saved inside each project file and printed in each report, so that an old study always carries with it the identification of the program that produced it. The redundancy is deliberate: reports circulate separately from files, and the question «which version was this done with?» usually comes up months later, when nobody remembers.

The numbering scheme follows the usual software engineering convention. The first number indicates the generation of the program, and changing it means a reformulation of the conceptual model; the second indicates a set of new features; and the third indicates fixes and adjustments that do not change the architecture. A first number of zero marks a beta: the program is usable and verified as section 5.3 describes, but its interface, file format and defaults may still change, and a change may alter results.

The current version is the beta **0.2.0**. The only earlier version is the beta 0.1.0, published on 5 November 2026 with its own DOI, 10.5281/zenodo.23402916. Version 0.2.0 changes the multi-criteria decision, so a study made with 0.1.0 is reproduced with 0.1.0.

6.3.2. How this history is kept

From now on, each version released gets an entry of its own in this section, with the release date and what changed, always split into two lists: what alters the results of studies already done and what does not. The most recent entry comes first.

Each entry follows the same model, so that two versions can be compared without rereading: a one-sentence summary, the new features, the fixes that alter results, those that do not, and what changed in the documentation. Sections with no content in that version simply do not appear.

The same list is distributed with the code, in the `CHANGELOG.md` file at the root of the repository, and feeds the versions page of the documentation site. It is written here first, and the maintainers keep the other two equal to it. Those following the program through the repository, the site or the manual read the same record.

Table 150 — **Table 99** — Overview of the published versions

Version	Date	What it brought	Fixes that change results
0.2.0 (beta)	11 November 2026	The multi-criteria decision moves from seven criteria in three dimensions to eight criteria in four — technical, economic, environmental and structural — and the program now calculates the weight of the system.	1
0.1.0 (beta)	5 November 2026	First beta of Triton, with its own name for each edition, in the same repository and with the same version numbering.	0

6.3.3. Version 0.2.0 (beta) — 11 November 2026

> **In one sentence.** The multi-criteria decision moves from seven criteria in three dimensions to eight criteria in four — technical, economic, environmental and structural — and the program now calculates the weight of the system.

6.3.3.1. What is new

- **Eight criteria in four dimensions.** Technical: volumetric reliability and storage efficiency. Economic: net financial savings (the NPV against the baseline without a cistern), the levelised cost of water (LCOW) and the discounted payback. Environmental: the net life-cycle CO_2e. Structural: the dry mass of the materials and the annual overflow. Section 2.10 defines each one as the program computes it, with the LCOW equation.
- **Weights by dimension, with criterion shares.** Four dimension weights, 25% each by default, each shared among the criteria of its dimension by the criterion shares, equal by default. Eight direct weights, one per criterion, are also accepted. TOPSIS, VIKOR and PROMETHEE II use the same rule; SMAA-VIKOR draws eight weights, with 25% expected on each dimension, and gives the central weights per criterion and per dimension.
- **The decision tab.** One card per dimension (Technical, Economic, Environmental, Structural), with the dimension weight at the top and the criterion shares of its criteria below; the «Equal shares» and «Recalculate» buttons below the cards; the profiles «Balanced: 25% on each dimension», «Prioritise …» with 70% on one dimension and 10% on each of the others, including «Prioritise Lightness and Drainage», and «Objective weights (CRITIC), computed from the results».
- **Command line, project file and declarative study.** `--weights t,e,a,s` (or eight values, or `critic`), `--criterion-shares` with eight values (default `1,1,1,1,1,1,1,1`) and `--score-band` (default `0.05`); `analysis.topsis_weights` (four or eight values, or `"critic"`), `analysis.topsis_criterion_shares` (eight) and `analysis.topsis_score_band` in the project file; `analise.pesos` (four or eight, or `"critic"`), `analise.partes_no_eixo` (eight) and `analise.tolerancia_faixa` in `estudo.json`, with the metrics `faixa_topsis_min_l` and `faixa_topsis_max_l`.
- **Objective weights by CRITIC.** Instead of declaring the weights, the analysis can compute them from its own results by the CRITIC method (Diakoulaki, D.; Mavrotas, G.; Papayannakis, L., 1995. Determining objective weights in multiple criteria problems: the CRITIC method. *Computers & Operations Research*, 22(7), 763–770, doi:10.1016/0305-0548(94)00059-H): each criterion weighs by its contrast across the volumes times its independence from the other criteria. The weights hold for TOPSIS, VIKOR and PROMETHEE II, are recomputed at every analysis and change with the set of volumes evaluated. It is a choice of method, not a default: the default is still 25% on each dimension. In the decision tab, the profile «Objective weights (CRITIC), computed from the results»; on the command line, `--weights critic`; in the project file, `analysis.topsis_weights: "critic"`; in the declarative study, `analise.pesos: "critic"`.
- **A choice band instead of a single volume.** When several volumes score alike, the program no longer names one «best volume»: it reports the volumes whose score, rescaled from the worst (0) to the best (1) of the volumes evaluated, lies within a tolerance of the best — 5% of the score range by default — and the volume with the highest score as information. The rule holds for TOPSIS, VIKOR, PROMETHEE II and SMAA. The decision tab, the text, HTML and JSON outputs of the command line and the metrics of the declarative study show the band; the tolerance is set with `--score-band`, `analysis.topsis_score_band` or `analise.tolerancia_faixa`.
- **Weight of the system.** `triton analyze … --analysis all` (and `--analysis system_weight`) reports the dry mass, the water load and the operating load, in kg and kN, split into basement or lower level, roof or upper level, and risers and network. The HTML report, the spreadsheet (sheet `system_weight`) and the terminal text show the block. Its warnings are attention thresholds of the program, not of any standard —

500 kg on the roof with the upper tank full, an upper tank above 1,500 L, a cistern above 3,000 kg dry, and any concrete cistern — and ask for a check with the structural or foundation design.

6.3.3.2. Fixes that change results

The multi-criteria model was replaced. A study that ranked volumes with version 0.1.0 can rank them differently with this version.

Table 151 — Fixes that change results in version 0.2.0

What was corrected	Effect on the result
The multi-criteria decision used seven criteria in three dimensions, and three of them — the saving potential, the potable water consumption and, through the bill, the NPV — measured the same water saved. It now uses eight criteria in four dimensions, with the weight of the system.	The volume chosen by TOPSIS, VIKOR, PROMETHEE II and SMAA-VIKOR can change. In the New York tutorial, with equal weights, TOPSIS moves from 4,000 L to 2,000 L. Three weights from a project or study of version 0.1.0 are still accepted: the structural dimension receives their mean, so equal weights stay equal. Seven values, weights or shares of the old model, are refused with a message that says why. SMAA-VIKOR now draws the eight weights with 25% expected on each dimension; version 0.1.0 drew them uniformly over the criteria, so a dimension with more criteria weighed more on average, and every acceptability changes. To reproduce a study made with version 0.1.0, use version 0.1.0 (DOI 10.5281/zenodo.23402916).

6.3.3.3. Fixes that do not change results

- A choice band with a single volume no longer reads 'volumes from 1000 to 1000 L': the command line, the HTML and the interface say that only that volume lies within 5% of the range; a band with gaps lists its volumes instead of implying that those in between belong to it.
- The SMAA-VIKOR line of the command line gives its band when it holds more than one volume.
- With `--weights critic`, the JSON carries the computed weights, summed per dimension, in `topsis.weights`.
- The decision sentence of the interface compares the difference in avoided CO2e with the smallest cistern (previously the alternative's absolute value), with its sign, and keeps the decimal comma in the score and the acceptability.
- The Documentation tab describes the four dimensions, the 70/10 profiles, CRITIC, the choice band and the per-dimension Dirichlet of SMAA.
- The text report of the command line names the criterion behind the best economic alternative (shortest payback or, when none pays back, highest NPV), writes the payback in years in the edition's language, warns when construction costs are not set (zero CAPEX) and says what the best environmental figure is: net CO2e avoided over the service life, negative when the system emits more than it avoids.

6.3.3.4. Documentation

Sections 4.9, 3.6, 2.10 and 6.2 describe the eight criteria, the LCOW, the weight rule, the objective weights of CRITIC, the choice band, the options of the command line and the weight of the system; section 4.10 asks a study to report the band and its tolerance, and the CRITIC weights when it used them. Section 4.9 now says plainly that the multi-criteria analysis with equal weights indicates a band of 2,000 to 3,000 L, why the tutorial keeps the 4,000 L of the hydraulic criterion, and what that choice gives up. The interactive figure of the decision on the site has four dimension weights, the criterion shares and the choice band. The release notes are in `docs/NOTAS_DE_LANCAMENTO_0.2.0.md`. Version 0.2.0 has no DOI of its own yet: cite the DOI of all versions, 10.5281/zenodo.23402915, which always resolves to the most recent one.

6.3.4. Version 0.1.0 (beta) — 5 November 2026

> **In one sentence.** First beta of Triton, with its own name for each edition, in the same repository and with the same version numbering.

6.3.4.1. What is new

Triton simulates rainwater harvesting day by day and carries the simulation engine, the life-cycle assessment, the treatment line, the multi-criteria decision and the probabilistic modulation. This is the first version of the International Edition, which has its own name and logo and shares the repository and version numbering with the other editions. The Fewkes operating rule (φ) is available as an option in every module.

What the International Edition brings in this version.

- **A region-neutral program.** It ships no regional rainfall database, no tariff catalogue, no cost catalogue and no emission-factor series, and it applies no national standard and no predefined currency. You supply the rainfall series of the site, the tariffs, the costs and the currency.
- **Three worked examples.** New York, London and Cape Town, with one building and three rainfall series (ERA5 reanalysis via Open-Meteo, 1991 to 2020, CC BY 4.0) and three tariff structures, each checked by hand against its printed bill.
- **The analysis chain.** Daily water balance, volume sweep and ideal volume, economic analysis with block tariffs and six tariff regimes, life-cycle assessment, treatment line, certification scoring, multi-criteria ranking, reports in PDF and spreadsheet, CAD and BIM exports.
- **Batch studies from JSON.** The `triton estudo` subcommand organises a study in an `estudo.json` (base project, cases by typology, parameter substitutions by alias, analysis and outputs), runs every case in a stable order, with resume and parallel execution, and writes paper-ready tables: tidy CSV, JSON with provenance (version, edition, SHA-256, rainfall source and licence), Markdown, LaTeX (booktabs) and XLSX. A text template with markers receives the real numbers and leaves «XX» where a result is missing. A worked study is in `examples/estudos/`.
- **Documentation.** The complete manual in English, an offline site, short volumes and `docs/DADOS.md`, which describes every dataset with its source, licence and quality.

What this version does not have.

- **Regional data.** No rainfall database, no climate projections, no tariff catalogue.
- **Prices.** The program does not calculate an investment from prices. Cistern, tank, piping, accessories, labour, pump and maintenance costs start at zero, and so do the electricity tariff and the price of chlorine; the water tariff is empty. Section 4.7 says what a new project contains and what you enter.
- **Emission factors.** The grid factor is zero until you enter the factor of your grid.
- **Verified example tariffs.** The three example tariffs are illustrative.

Known limitations.

- The address of each tariff document, its access date and its checksum were not recorded when the examples were built, so the figures cannot be traced to a stored copy; the effective dates of the London and Cape Town tariffs are inferred. The payback and the net present value shown for the example projects are not results.
- The example rainfall series are reanalysis grid cells of about 9 km, not rain-gauge records.
- The CAPEX dialog has no field for the cistern price and sets it back to zero on confirming; section 4.7 gives the way round. With no price list, the cistern price you enter applies to every volume of the volume sweep. The price of chlorine can be set only in the project file.

- In Spanish and Chinese the interface is partly translated, and the reports in those languages contain passages in another language; English is complete.
- The life-cycle steps warn that country factors are missing, by design.

6.3.4.2. Fixes that change results

None: this is the first beta, and there is no earlier version to correct.

Table 152 — Fixes that change results in version 0.1.0

What was corrected	Effect on the result

6.3.4.3. Fixes that do not change results

None.

6.3.4.4. Documentation

The manual gained the sections «CAPEX in this edition», «What goes into the running cost (OPEX)», «Regional and national particulars» and «Description of the data and how far to trust it».

6.3.5. How to tell whether your version has a fix

The procedure is direct and does not depend on asking anyone: open one of the example files that come with the program, described in appendix J, run it, and compare the result obtained with the value printed in this manual. Each example case was generated by the same version of the program that generated this manual, and each published number has a matching automatic check, as section 5.3 describes. A divergence, therefore, indicates that the installed program is not that of this manual's version.

If the numbers match, your installation corresponds exactly to the manual you have in hand. If they do not, the difference is not a defect of your installation, but a version difference that needs to be identified before any study.

6.3.6. What to declare in a published work

Good practice in computational reproducibility requires a paper to identify unambiguously the program that produced the results. In Triton's case, four items of information are enough, and all are available without effort: the version of the program, which appears in the report; the source of the precipitation series, with the period used; the tariff structure adopted, with its effective date; and a statement of which parameters were changed from the default values. Section 4.10 gives the full list, with a ready-made method paragraph to adapt.

Attaching the `.triton` file to the supplementary material settles all four at once, because the file is self-contained and carries the rainfall series inside it. It is the most economical way of making a study verifiable by others, and costs a small attachment.

6.4. How to report a problem

Simulation programs have defects, and Triton is no exception. The review carried out before this beta found a dozen calculation defects, none of them accompanied by an error message, and most of them discovered not by reading the code but by comparing two points of the program itself that should agree and did not. The practical lesson is that the attentive user is the best source of detection a scientific program has, and that is why this section exists.

A good report is one that allows the problem to be reproduced without you being there. Everything asked for below serves that single aim.

6.4.1. What to send

A useful report has four components, and the absence of any of them usually turns the investigation into an exchange of messages that takes more of everyone's time than the fix itself.

The project file. It is the most important item, and on its own it replaces pages of description. The `.triton` file is self-contained: it carries all the parameters and the whole rainfall series inside it so whoever receives it reproduces your simulation exactly, on the same machine or any other. Without it, the investigation starts by trying to guess the inputs, and guessing inputs is the most efficient way of not finding a defect.

What you expected and what you got. This is the part only you can provide. Describe the number that appeared and the number that should have appeared, with the reason for the second — be it a hand calculation, a result from an earlier version, a value from the literature or simply the order of magnitude experience suggests. A report that only says «the result is wrong» leaves the recipient to discover which of the forty numbers on the screen is the wrong one.

The version of the program. It appears in the sidebar, in the footer and in the **About Triton** menu, and is already saved inside the project file and any exported report. State it anyway, because it is the first filter of the investigation: half the problems reported in scientific programs are defects already fixed in a version later than the one the user has installed. State the edition too.

The error message, if there is one. Copy the full text, not a summary. Section 6.2 lists the messages the program raises deliberately, with the meaning of and the action for each one; if your message is there, the problem is probably one of input and has an immediate solution.

6.4.2. What to check before reporting

A considerable share of the results that look wrong are correct results of wrong inputs, and the check below takes a few minutes. It is not there to discourage the report, but so that your time and that of whoever investigates is spent on what really is a defect.

Start with section 5.1, which gathers the ten design mistakes the program has no way of preventing. Three of them account for most unexpected results: the catchment area entered as the sloping area of the roof instead of the horizontal projection, the first-flush depth entered in litres instead of millimetres, and the tariff regime treated as a minimum consumption when it is an availability charge — or the reverse.

Then check whether the behaviour observed is not a declared limitation. Section 5.2 lists what the program admittedly does not do, and some of those limitations give exactly the impression of a defect. The most frequent case involves the tariff category: the program uses the structure typed in, so a study of a school or a shop comes out with the residential tariff until the user enters that of the right category. The program warns about this instead of correcting it on its own, because the right table is public and specific to each utility.

6.4.3. Where to send it

Triton is developed by a university research group. The contact given with the program menu and in the repository is the reporting channel, and it serves for defects as well as for feature suggestions and requests for clarification of the method. Reports may be written in English.

Reports that come with the project file go straight into the verification suite described in section 5.3: a case that reproduces a defect becomes a test, and the test then keeps that defect from coming back. That is why the file matters so much, and it is also the most complete answer that can be given to whoever reported — the problem was not only fixed, it is now watched.

> **IN DEPTH · WHAT MAKES A DEFECT HARD TO FIND**
> The defects that survive for years in a scientific program all have the same signature: they produce plausible numbers. An error that generates a negative value, or one a thousand times larger than expected, is found on the first run. But an efficiency factor applied twice, or a unit converted once more than necessary, produces a number that passes any visual inspection and survives years of use. That is why the program's verification rests on invariants — the mass balance that must close, the monotonicity that must hold, the ceiling the curve cannot cross — and not only on expected values. When you suspect a number, the quickest way to confirm the suspicion is to look for one of those identities it violates.

6.5. Roadmap

> Where the program should go, and on what evidence. A roadmap that separates what is decided from what is intended lets users plan a study with the version they have today, not the one they would like to have.

This section summarises the `ROADMAP.md` at the root of the Triton repository and reflects the state of the beta version 0.2.0. Nothing below the line «Stable» exists in this version: these are intentions of the research group, with no delivery date. When an item is implemented, it leaves this list and enters the version history, with a note on whether it changes the results of studies already done.

The direction comes from two sources. The first is the systematic literature review the group is conducting on the simulation of rainwater harvesting. It shows where published studies omit the operating rule, the definition of reliability and the economic parameters. The second is the program's own issue register, described in the section «Known limitations».

6.5.1. What is already stable in 0.2.0

Climate series. Daily series supplied by the user, plus ERA5 example series for New York, London and Cape Town. **Tariffs.** Entered by the user, with progressive blocks, fixed charges, allowances and escalation. **Water balance.** Daily simulation by the Triton rule, with strict YAS, YBS and the Fewkes (2000b) parameter φ as options for a single tank. **Decision.** Multi-criteria by TOPSIS and by SMAA-VIKOR, with eight criteria in four dimensions (technical, economic, environmental and structural), declared criterion shares or objective weights by CRITIC, and a choice band instead of a single volume. **Weight of the system.** Dry mass, water load and operating load by position, with attention thresholds of the program. **Uncertainty.** Probabilistic modulation of the assumptions (section «What probabilistic modulation is»). **Edition.** International.

6.5.2. Version 1.1: consolidation and reliability

Table 153 — Items planned for version 1.1

Axis	Item	Method
International Edition	Global rainfall providers	ERA5-Land and NOAA GHCN-Daily reanalyses
International Edition	Metric and imperial units	Conversion without residual, with mass conservation checked in both
International Edition	Seasonal and scarcity tariffs	Dynamic blocks, drought surcharge, separate sewer charge
Multi-criteria decision	Full ranking with the GAIA plane	PROMETHEE II
Multi-criteria decision	Veto thresholds and viability classes	ELECTRE Tri
Multi-criteria decision	More consistent weights	Best-Worst Method (BWM)
Probability and risk	Dependence between rainfall and demand	Bivariate copulas (Clayton, Gumbel)
Probability and risk	Which variables govern the result	First-order and total Sobol indices
Probability and risk	Synthetic rainfall	Block bootstrap, preserving consecutive dry days
Costs and engineering	Installation cost by material and soil	Parametric curves by technology and soil class
Costs and engineering	Detailed operating cost	Filters, disinfection, pump degradation curve

6.5.3. Version 2.0: methodological frontier

Table 154 — Items planned for version 2.0

Axis	Item	Method
System physics	Hourly time step	Hourly model with rain-gauge data
System physics	Root-zone water balance	FAO-56 Penman-Monteith, for irrigation
System physics	Variable runoff coefficient	Depends on depth and antecedent dry spell
Territorial	Urban catchment scale	GeoJSON vectors

6.5.4. How to read this roadmap

The order is not a commitment of dates. The order follows the consequence for the result of a study. The hourly step, for example, only arrives in 2.0 because it needs rain-gauge data that most municipalities do not have.

An item enters on evidence. Each method listed answers a gap measured in the literature review, not an implementation preference.

A change that alters results is declared. Anyone publishing with the program must record the version used. That is why the version history separates the correction that changes a number in a study already done from the one that changes only the interface.

7. Probabilistic modulation

7.1. What probabilistic modulation is

> **Question this chapter answers:** is the volume the study chose still a good choice when the assumptions are not exactly the ones I declared?

The Triton study answers with one number per volume. That number holds for the declared assumptions: one per capita consumption, one number of occupants, one non-potable fraction, one catchment area, one tariff, one discount rate. None of them is known exactly at the design stage. The per capita consumption of a house that does not yet exist is estimated; occupancy changes over the service life; the rainfall of the next twenty years does not repeat that of the last thirty; tariffs are revised.

Tool **13. Probabilistic Modulation** measures how much of that uncertainty reaches the result. It reruns the finished study many times — a thousand, by default — each time with the chosen assumptions drawn from distributions declared by the user, and returns the **distribution** of the result instead of a single value: bands of savings and of net present value per volume, the probability that the investment pays back and the frequency with which each volume would be chosen.

The deterministic study does not change. Steps 5 to 9, the reports and the command line keep using it. The modulation is a robustness layer on top of the study: it does not choose another volume, it says how well the choice holds.

7.1.1. When to use it

The modulation answers three questions the deterministic study does not:

1. **How wide is the result?** With what margin does the study's saving hold? The band between the 5th and 95th percentiles of the realisations is the number that should accompany the published result.
2. **With what probability does the investment pay back?** A positive net present value in the base case may hide a sizeable chance of loss; the modulation gives that chance and its confidence interval.
3. **Is the design decision stable?** If the chosen volume wins in a minority of the realisations, next to neighbours with similar frequencies, the choice is fragile and the text must say so.

In the tutorial example, in section 7.4, the three answers appear in numbers.

It is the natural continuation of the sensitivity analysis of section 3.7. Sensitivity varies one assumption at a time; the modulation varies all the chosen ones at once, with weights that come from the distributions, and reveals combinations that a tornado chart does not show.

7.1.2. What it does not do

The modulation does not replace measured data. A wide distribution around a wrong value is still centred on the wrong value: when consumption has been metered, the measurement is worth more than any draw. The starting distributions the screen proposes are **screening values** — centred on the project, with generic widths — and must be adjusted to what is known about the building. Section 7.5 discusses the limits of the method.

7.2. The variables and the distributions

> **Question this section answers:** what can I draw, and how do I describe the uncertainty of each assumption?

7.2.1. The catalogue of variables

The tool draws twenty assumptions, organised in seven groups. On opening, only the three consumption ones are ticked — per capita consumption, number of occupants and non-potable fraction — because they are the most uncertain in a new project and the ones the literature shows to move the result (Silva and Ghisi, 2016). The others keep the study value until the user ticks them.

Table 155 — The variables that probabilistic modulation can draw, with the screening distribution the screen proposes

Group	Variable	Unit	Screening distribution	Ticked on opening
Demand	Per capita consumption	L/person/day	lognormal, project mean, CV of 20%	yes
Demand	Number of occupants	occupants	normal, project mean, deviation of 1 occupant; integer from 1 to double	yes
Demand	Indoor non-potable fraction	%	normal, project mean, deviation of 5 points; 0 to 100%	yes
Demand	Outdoor demand	L/day	normal, project mean, CV of 30%	no
Catchment	Catchment area	m²	normal, project mean, CV of 5%	no
Catchment	Runoff coefficient	—	triangular, from project −0.10 to project +0.05; 0 to 1	no
Catchment	First-flush depth	mm	uniform, from project −1 mm to project +1 mm	no
Rain	Rainfall factor	×	normal, mean 1, deviation of 0.10	no
Tariffs	Water and sewerage tariff factor	×	normal, mean 1, deviation of 0.10	no
Tariffs	Sewerage factor	×	normal, mean 1, deviation of 0.10	no
Tariffs	Tariff escalation	% per period	normal, project mean, deviation of 2 points	no
Tariffs	Energy tariff	currency units/kWh	normal, project mean, CV of 10%	no
Tariffs	Electricity escalation	% per period	normal, project mean, deviation of 2 points	no
Costs	Investment factor	×	lognormal, mean 1, deviation of 0.15	no
Costs	Cistern price factor	×	lognormal, mean 1, deviation of 0.15	no
Costs	Running cost factor (O&M)	×	lognormal, mean 1, deviation of 0.25	no
Costs	Running cost inflation	% per month	normal, project mean, deviation of 0.10 point	no
Cash flow	Minimum attractive rate of return	% per month	normal, project mean, deviation of 0.25 point	no
Cash flow	Analysis period	years	triangular, from project −5 to project +5 years; integer, at least 1	no
Environment	Potable water emission factor	×	normal, mean 1, deviation of 0.20	no
Environment	Grid electricity emission factor	×	normal, mean 1, deviation of 0.20	no

Each group acts at a different point of the calculation chain:

- **Demand** changes the daily consumption and the fraction that rainwater can supply. The total suppliable fraction is recalculated at every draw from the indoor fraction and the outdoor demand, by the same rule as the study (section 4.2). In the weekly, monthly and daily modes, the series receive the drawn factor: the calendar profile is kept, and the level changes.
- **Catchment** changes the volume of rain that reaches the cistern: area, runoff coefficient and first-flush depth.
- **Rain** multiplies the whole daily series by a factor. It is the simplest way to represent future rainfall drier or wetter than the historical record. Drawing amongst climate models, described below, replaces the series itself.
- **Tariffs** changes the price of water, sewerage and electricity and their escalation.
- **Costs** changes the initial investment and the annual operation and maintenance cost.
- **Cash flow** changes the discount rate and the analysis horizon.
- **Environment** changes the emission factors of the life-cycle assessment.

7.2.2. What each economic variable multiplies or replaces

The economic variables are of two kinds. Those with their own unit — escalations, rate, inflation, electricity tariff, period — **replace** the project value by the drawn one. The **factors** (×) multiply a project value and equal 1 in the study: a drawn factor of 1.15 represents a cost 15% above the estimate. The table states what each one acts on and what it leaves out.

Table 156 — What each economic and environmental variable does in the calculation, and what it does not touch

Variable	Acts on	Does not touch
Water and sewerage tariff factor	every monetary value of the water structure — bands, fixed charge, minimum bill, base price of the exponential curve — and sewerage charged in currency units (fixed or per m³)	the exponent of the exponential curve; sewerage as a % of water, which already follows the water
Sewerage factor	the sewerage tariff, in the mode the project declares: the percentage, the fixed value or the price per m³	the water tariff
Tariff escalation	the escalation of water and sewerage in each escalation period, instead of the declared one	the electricity escalation
Electricity tariff	the price of the pumping kWh, instead of the declared one; the tariff flag is still added	—
Electricity escalation	the escalation of the electricity tariff in each period	—
Investment factor	the **whole** initial investment of each volume: cistern, upper tank, pump, piping, accessories, labour and treatment line	the annual running cost
Cistern price factor	only the cistern price of each volume, the part of the investment that grows with volume; with automatic labour, labour follows it, by the program's rule	the other items of the investment
Running cost factor (O&M)	the annual operation and maintenance cost: the items declared in the economic step, the running cost of the treatment line and chlorine	pumping energy, which has its own variables
Running cost inflation	the annual adjustment of the running cost, instead of the declared one	the tariffs
Minimum attractive rate of return	the discount rate of the cash flow	—
Analysis period	the horizon of the cash flow and of the environmental assessment, in whole years	the rainfall series, which remains that of the study
Potable water emission factor	the emission per m³ of the mains water the cistern avoids	the embodied carbon of the materials
Grid electricity emission factor	the emission factor of the pumping energy	the embodied carbon of the materials

The two investment factors combine. Ticked together, the cistern receives the product of both, and the rest of the investment only the investment factor. In practice, the investment factor represents the uncertainty of the estimate as a whole — region, date, contingencies — and the cistern factor that of the item that defines the optimum: since the cistern price is the part of the cost that grows with volume, it is the one that shifts the volume with the shortest payback.

7.2.3. Rainfall uncertainty

The International Edition has no database of climate-model series, so rainfall uncertainty enters through the **rainfall factor**. The factor multiplies the whole daily series of the project — a file the user supplies, or one of the bundled example series — and so keeps its temporal structure: the sequence of dry spells and rainy days does not change, only the level. A factor drawn with mean 1 and a deviation of 0.10 represents rain 10% wetter or drier than the record, which is how to represent a future climate drier or wetter than the past. To test a different sequence of dry spells, run the study once with each alternative series and compare.

7.2.4. The four distributions

Each ticked variable receives a distribution and its parameters:

Table 157 — The four distributions the tool offers, their parameters and when to use each

Distribution	Parameters	When to use
normal	mean and standard deviation	symmetric uncertainty around a likely value
lognormal	mean and standard deviation	positive quantity with an upper tail, such as consumption and construction cost
triangular	minimum, mode and maximum	when the range and the most likely value are known, but not the shape
uniform	minimum and maximum	when only the range is known

For the lognormal, the mean and standard deviation entered are those of the variable itself, not of its logarithm: the program computes the lognormal parameters that return exactly the requested mean and standard deviation. Any distribution can be **truncated** by a lower and an upper bound; a value drawn outside them is drawn again. The number of occupants and the analysis period are rounded to integers and never fall below 1; the non-potable fraction and the runoff coefficient stay between 0 and 100% and between 0 and 1; factors, prices, areas and consumptions are never negative.

Each card on the screen shows the curve of the chosen distribution, drawn with 4,000 samples, and its 5th and 95th percentiles. It is the quickest way to check whether the declared width is plausible: a P95 of 400 L/person/day for a dwelling indicates an exaggerated deviation.

7.2.5. The level, not the noise of the day

The variables are drawn **once per realisation**: in each realisation, the house has one per capita consumption, one occupancy and one fraction, valid for the whole rainfall series. This represents the uncertainty about **how much** the building consumes, which is the one that matters. Day-to-day variation around that level, optional (field «Daily variation»), barely moves the result: drawn independently every day, it cancels out over thirty years of series (Silva and Ghisi, 2016; section 3.6, `stochastic-demand` subcommand).

7.3. How to run it

> **Question this section answers:** what are the steps, on the screen and on the command line?

7.3.1. In the interface

The tool sits at the end of the sidebar, in **13. Probabilistic Modulation**, in both editions. It starts from the study that steps 1 to 4 describe — the same configuration the program writes to the `.triton` file — with the TOPSIS weights and the environmental assumptions of the screen. With no rainfall series loaded, the tool warns and does not run. To start, open the case `09_modulation_tutorial.triton` or `10_modulation_catchment.triton` (appendix J): both are New York studies that arrive with the tool set up, and a click on **Simulate** is enough.

The distributions start from the screening of the open study. When another project is opened, or an assumption changes in steps 1 to 4, the cards that have not been edited follow the new value; the edited ones stay as they are. In a fixed-volume study, the tool shows only the study volume: the per-volume figures and table require the step 4 sweep.

The screen has four blocks, from top to bottom:

1. **What to vary.** The twenty variables, in seven groups, with tick boxes. Hovering over one of them shows what it represents. Section 7.2 describes each group.
2. **Distributions.** One card per ticked variable, with the study value, the distribution, the parameters, the bounds and the curve. The **Screening values** button returns every distribution to the default centred on the project.
3. **Run.** The number of realisations (1,000 by default), the seed (42) and the optional daily variation. **Simulate** runs in the background, with a progress bar, remaining time and a **Cancel** button; when cancelled, the analysis shows the realisations already done.
4. **Results.** Numbered tables and figures, explained in section 7.4.

The layout rearranges itself with the window width — three, two or one column — and there is no horizontal scrolling. The distributions, the ticked models, the number of realisations and the seed are saved in the project and return when it is reopened; the results are not, because they are reproduced identically with the same seed.

The time grows with the number of realisations, of volumes and of years of rainfall. Each realisation reruns the technical, economic, environmental and TOPSIS chain for every volume; the SMAA-VIKOR acceptability (section 2.10), which draws twenty thousand weight vectors, is left out of the realisations, because the modulation only uses the volume with the highest TOPSIS score. In the tutorial, with 21 volumes and thirty years of rainfall, the progress bar estimates the remaining time from the first realisations. The **Export (CSV + JSON)** button writes the samples, one line per realisation, and the full summary, with the seed and the distributions.

7.3.2. On the command line

The `probabilistic-study` command uses the same core as the screen and gives the same numbers with the same project and the same seed:

```
triton probabilistic-study 04_tutorial_sweep.triton --samples 1000 --seed 42
triton probabilistic-study 04_tutorial_sweep.triton --list-variables
triton probabilistic-study project.triton --var fator_chuva=normal:1:0.1 --var fator_investimento=lognormal:1:0.15
triton probabilistic-study project.triton --var fator_cisterna=lognormal:1:0.15 --var fator_om=lognormal:1:0.25
```

```
triton probabilistic-study project.triton --format json --output modulation.json
```

Without distribution options, the command reads the ones the screen saved in the project or, failing those, the screening values. `--var VARIABLE=DISTRIBUTION` switches on any variable of the catalogue and can be repeated; distributions are written `normal:mean:deviation`, `lognormal:mean:deviation`, `triangular:minimum:mode:maximum`, `uniforme:minimum:maximum` or `fixo`. The shortcuts `--per-capita`, `--people` and `--non-potable` apply to the three consumption variables, and `--daily-cv` to the daily variation. `--list-variables` lists the variables of the catalogue. The `csv` format writes the samples; `json`, the whole result. The old name of the command, `stochastic-study`, is still accepted.

7.4. How to read the results

> **Question this section answers:** what does each table and each figure say, and what should be declared in a report or a paper?

The example in this section is the New York tutorial project, saved with the tool already set up in the file `09_modulation_tutorial.triton` (appendix J), with six variables drawn: the three consumption ones, the rainfall factor, the tariff factor and the investment factor, with the screening distributions, in a thousand realisations and seed 42. The numbers in the tables are those the program computes; running the tool with the same project and the same seed reproduces them.

7.4.1. What went in

The first table on the screen states what was actually drawn: the study value, the declared distribution and the sample statistics. It is the first to read, because it confirms that the distributions produced what was intended — the sample mean should be close to the declared mean, and the interval between P5 and P95 should be plausible for the building.

Table 158 — The variables drawn in the tutorial example: declared distribution and statistics of the realisations

Variable	In the study	Distribution	Mean	Standard deviation	P5	P95
Per capita consumption (L/person/day)	150.0	lognormal (150.0; 30.0)	149.1	29.4	105.3	202.6
Number of occupants (occupants)	4	normal (4; 1)	3.9	1.0	2	6
Indoor non-potable fraction (%)	28.0	normal (28.0; 5.0)	28.2	5.1	19.3	36.3
Rainfall factor (×)	1.00	normal (1.00; 0.10)	1.00	0.10	0.84	1.16
Water and sewerage tariff factor (×)	1.00	normal (1.00; 0.10)	1.00	0.10	0.83	1.16
Investment factor (×)	1.00	lognormal (1.00; 0.15)	1.01	0.15	0.77	1.27

7.4.2. The result at the chosen volume

The second table summarises the volume the study chose — the one with the highest TOPSIS score in the base case — comparing the deterministic study with the mean, standard deviation, coefficient of variation and percentiles of the realisations.

Table 159 — Results at the volume chosen by the tutorial study: deterministic study and statistics of the realisations (money in US$, illustrative, not a market price)

Quantity	Deterministic study	Mean	Standard deviation	CV (%)	P5	P50	P95
Potable water savings (%)	24.2	24.0	4.1	17.3	17.3	24.0	30.9
NPV (US$, illustrative, not a market price)	−2,644	−3,116	1,537	49.3	−6,037	−2,972	−936
Discounted payback (years)	—	17.9	2.8	15.8	13.4	18.7	19.8
Life-cycle CO_2 balance (kg)	−200	−200	1	0.5	−201	−200	−198

Two readings matter. The first is the **width**: the interval between P5 and P95 contains 90% of the realisations and is the number that should accompany the published result. The second is the **position of the deterministic study** relative to the median. When the median falls below the base case, the non-linearities of the system — the progressive tariff, the minimum charge, the overflowing cistern — make unfavourable

realisations weigh more than favourable ones, and the base case is optimistic.

The discounted payback only exists when the investment pays back; the table computes it over the realisations in which that happens, and the screen states how many there were.

Table 160 — Probabilities at the chosen volume, with the Wilson 95% confidence interval

Event	Probability (%)	95% CI, lower bound (%)	95% CI, upper bound (%)
the investment pays back (NPV > 0)	0.8	0.4	1.6
the life-cycle CO_2 balance is positive	0.0	0.0	0.4

The probability that the investment pays back is the proportion of realisations with a positive net present value. The 95% confidence interval beside it is Wilson's (1927), suited to small samples and to proportions close to 0% or 100%. It measures the uncertainty of the **sampling**, not that of the assumptions: with more realisations it narrows; the probability itself does not.

7.4.3. The bands by volume

The following figures show the band between the 5th and 95th percentiles, the median and the deterministic study across all volumes. The dotted line marks the chosen volume, and the values written are its own (Figure 69 and Figure 70).

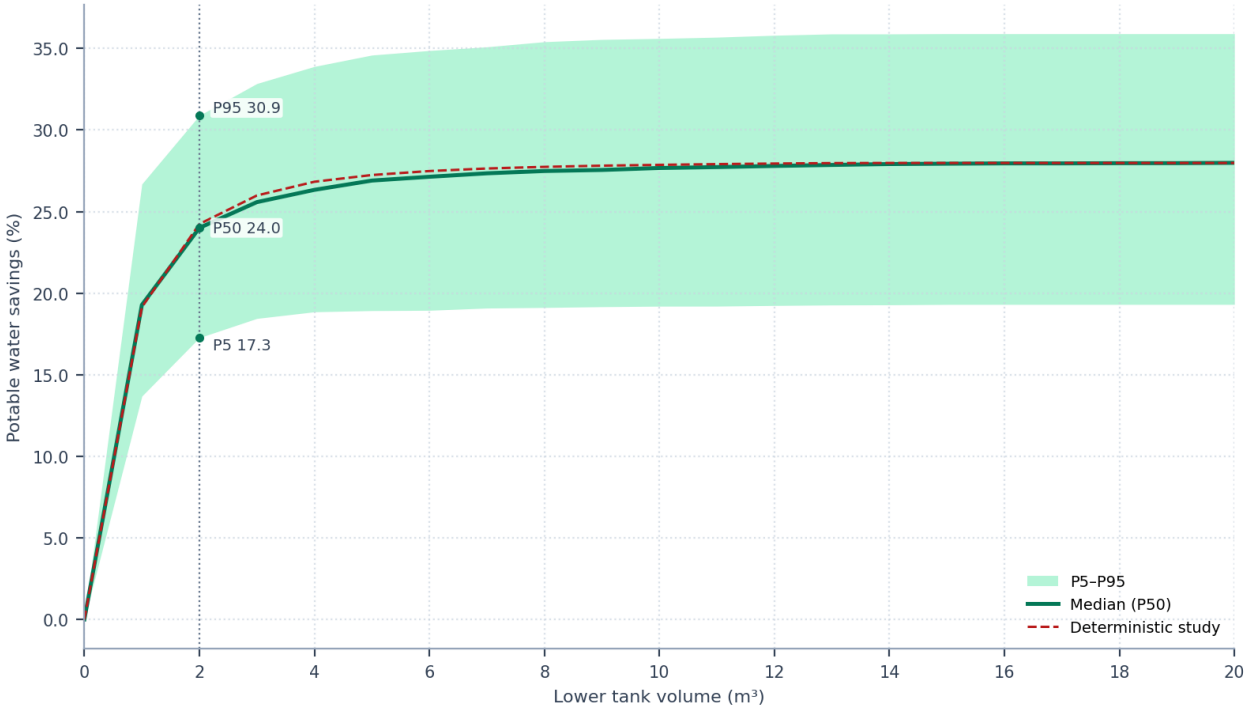


Figure 69 — Potable water savings by lower-tank volume in the tutorial example: band between the 5th and 95th percentiles of the realisations, median and deterministic study. The marked values are those of the volume chosen by the study (dotted line).

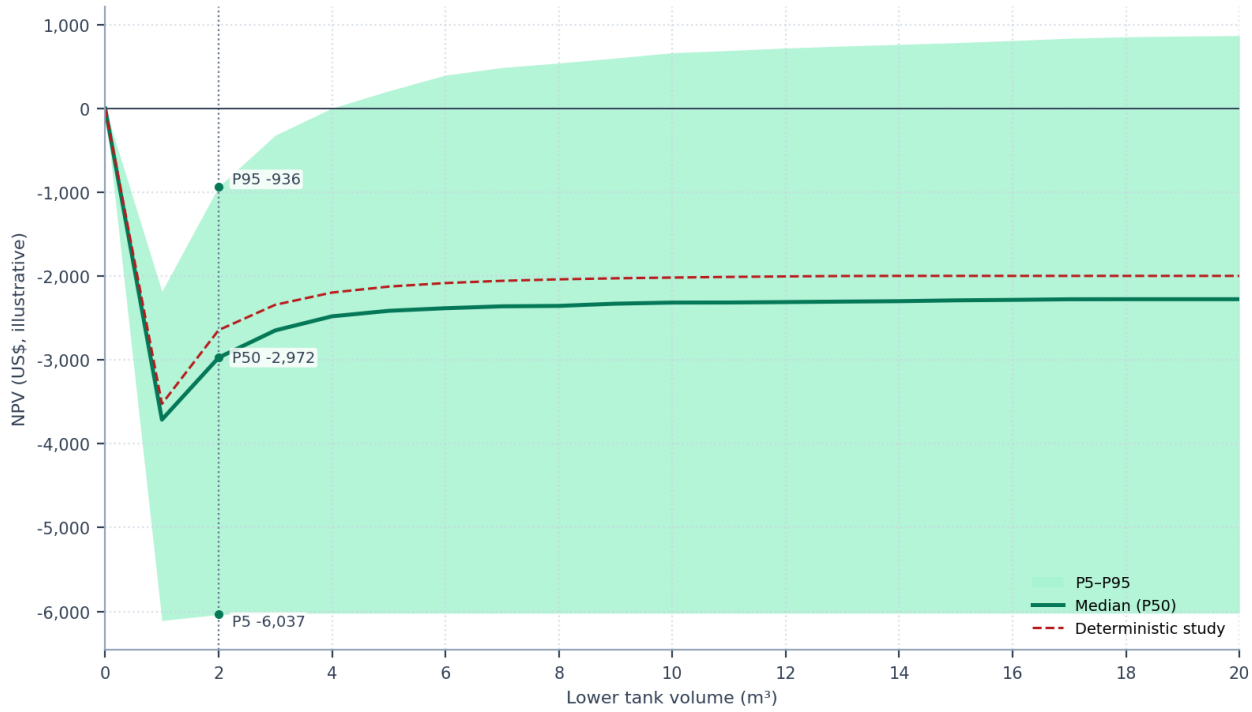


Figure 70 — Net present value by lower-tank volume in the same example. A band that crosses zero at every volume indicates that none of them pays back with certainty; a median below the deterministic study, that the base case is optimistic.

7.4.4. The stability of the choice

The frequency table and figure count, in each realisation, which volume would be the technical ideal, which would be the economic optimum — the one with the shortest discounted payback, the program's criterion (section 4.9) — and which would have the highest TOPSIS score (Figure 71). A realisation in which no volume pays back appears as «none pays back» in the economic column.

Table 161 — Frequency with which each volume is chosen in the realisations of the example, by criterion (%)

Volume (m³)	Technical ideal	Economic optimum (payback)	TOPSIS winner
1	0	0	14
2	4	0	75
3	28	0	8
4	32	0	3
5	28	0	0
6	9	0	0
7	0	0	0
13	0	0	0
15	0	0	0
16	0	0	0
17	0	0	0
18	0	0	0
19	0	0	0
20	0	12	0
none pays back	0	87	0

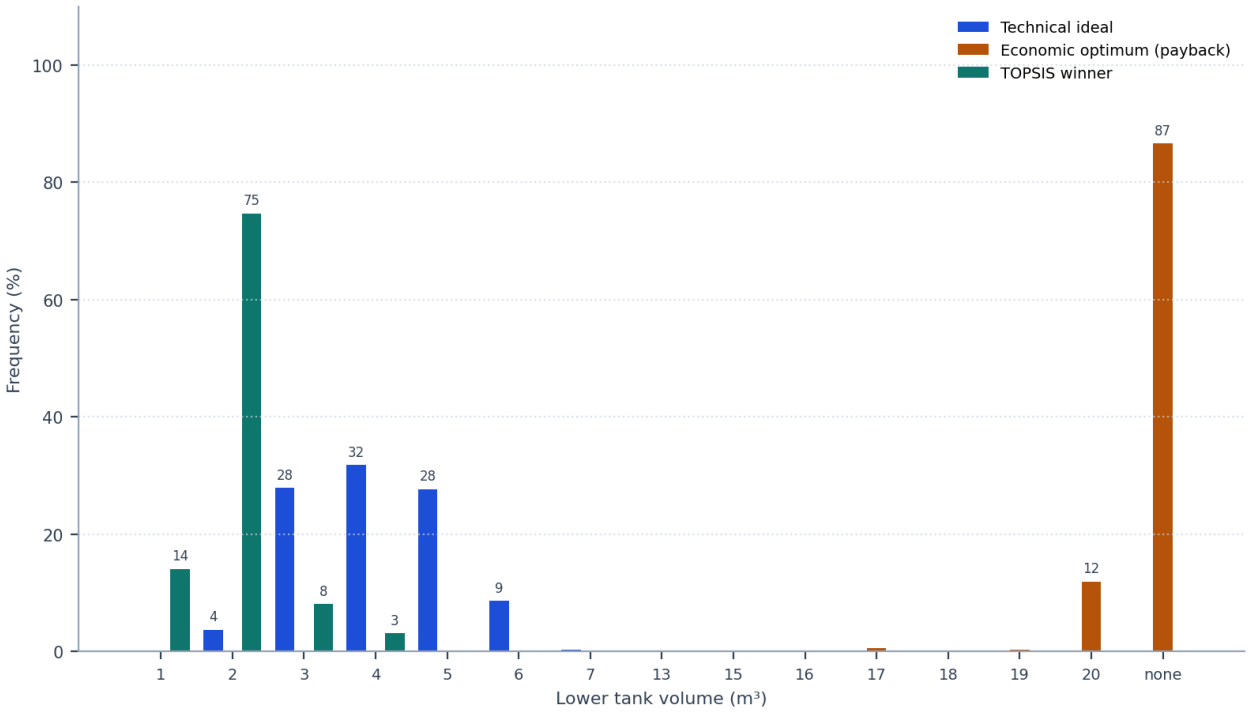


Figure 71 — Frequency, as a percentage of the realisations, with which each volume is the technical ideal, the economic optimum and the volume with the highest TOPSIS score in the tutorial example.

The reading is the same as that of the SMAA-VIKOR acceptability (section 2.10): a volume that wins in most realisations is a robust recommendation; one that wins in a minority, next to neighbours with similar frequencies, is a preference that depends on the assumptions, and the text must say so.

7.4.5. What weighs most

Sensitivity (Figure 72) is measured by Spearman's (1904) rank correlation between each drawn variable and the result at the chosen volume. The coefficient ρ ranges from −1 to 1: the sign gives the direction of the effect and the magnitude its strength. Because it uses ranks rather than values, it captures non-linear monotonic relations — such as that of the progressive tariff — and is not distorted by extreme realisations.

Table 162 — Sensitivity at the chosen volume: strength and direction of the influence of each drawn variable on the tutorial results

Variable	ρ with savings	ρ with NPV	ρ with CO_2 balance
Investment factor	−0.07	−0.52	−0.04
Number of occupants	−0.47	0.51	−0.69
Per capita consumption	−0.35	0.36	−0.47
Indoor non-potable fraction	0.70	0.35	−0.49
Water and sewerage tariff factor	0.01	0.26	−0.04
Rainfall factor	0.15	0.03	−0.11

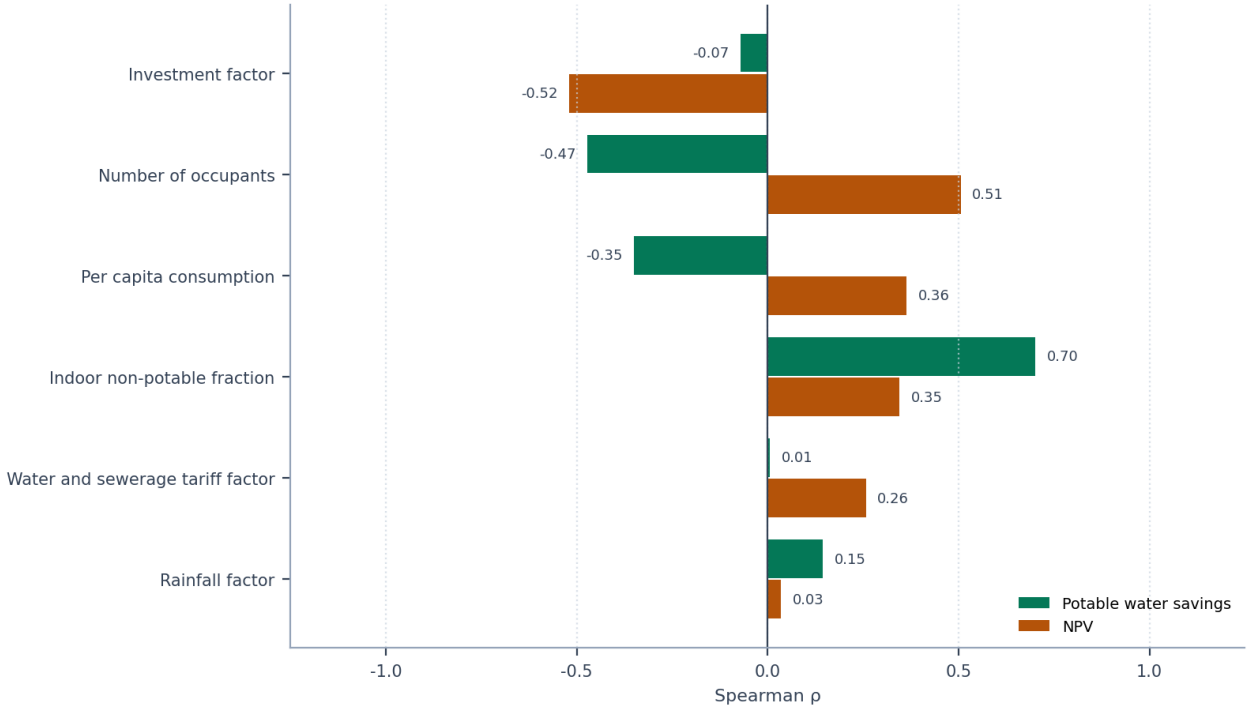


Figure 72 — Spearman rank correlation of each drawn variable with potable water savings and with the net present value at the volume chosen by the tutorial study, from the largest to the smallest influence on the net present value.

Rank correlation can show an effect that one-at-a-time analysis hides. The non-potable fraction defines the demand that rainwater can supply, so it is the natural candidate to move the **percentage** saving most. The number of occupants and the per capita consumption raise total consumption: they tend to move the percentage little, and in the opposite direction, but they can move the net present value a great deal, because more consumption pushes the bill into the dearer bands of a progressive tariff and every cubic metre saved becomes worth more. Read the table for your own case, and check which of these effects the tariff you typed in allows.

7.4.6. How much of the uncertainty comes from each source

ρ gives the direction and strength of a monotonic relation, but not what share of the uncertainty of the result comes from each variable. That share is the correlation ratio, η^2: the variance of the means of the result between classes of the variable, divided by the total variance. Continuous variables are grouped in deciles, the number of occupants and the climate model by their own values. η^2 estimates the first-order sensitivity index (Saltelli et al., 2008), ranges from 0 to 1 and also captures non-monotonic relations.

Table 163 — Share of the variance of the result explained by each drawn variable in the tutorial example, at the chosen volume (η^2; continuous variables grouped in deciles)

Source of uncertainty	η^2 of savings	η^2 of NPV	η^2 of CO_2 balance
Number of occupants	0.23	0.37	0.53
Investment factor	0.01	0.25	0.01
Per capita consumption	0.13	0.15	0.23
Indoor non-potable fraction	0.52	0.10	0.23
Water and sewerage tariff factor	0.01	0.06	0.01
Rainfall factor	0.03	0.00	0.02
Sum	0.94	0.93	1.01

In the example, compare the columns: the variables that dominate the variance of the savings are rarely those that dominate the variance of the net present value, and factors drawn with narrow screening widths, such as the tariff, investment and rainfall factors, usually weigh little. With independent variables and additive effects, the sum is close to 1; a sum well below 1 indicates interaction between the variables. The class-based estimate has a small upward bias, of the order of the number of classes divided by the number of realisations, so the sum may slightly exceed 1.

7.4.7. Catchment and rainfall

The second example, saved in the file `10_modulation_catchment.triton`, uses the same New York sweep but draws the uncertainty of the **catchment** — area, runoff coefficient and first-flush depth — together with the rainfall factor, the tariff factor and the investment factor, in a thousand realisations and seed 42. The International Edition has no per-model table, because it has no climate-model database: rainfall uncertainty enters through the rainfall factor, and the variance table lists the drawn variables, the rainfall factor among them.

Read this example for what it separates. A runoff coefficient or an area off by a few per cent changes every day of the series by the same proportion, so these variables shift the savings roughly in step with the rainfall factor; a deeper first flush acts mainly on small rains, which are the days that fill an empty tank. The η^2 table shows which of them the savings and the net present value actually respond to.

7.4.8. What to declare

In a report or a paper, declare: the drawn variables and their distributions (the first table), the number of realisations and the seed, the P5–P95 band and the median of the result at the chosen volume, the probability that the investment pays back with its interval, the frequency with which the chosen volume wins and the share of variance each source explains. The **Export** button writes all of this to JSON, and the CSV of the samples allows any statistic to be recomputed outside the program.

7.5. Method, statistics and limits

> **Question this section answers:** how does the modulation compute, and how far can it be trusted?

7.5.1. The procedure

The modulation is a Monte Carlo simulation over the program's full chain. For N realisations with seed s:

1. the program runs the base case, with the study assumptions;
2. it draws, at once, N values of each ticked variable, with the pseudo-random generator initialised by the seed;
3. for each realisation, it copies the project, replaces the assumptions by the drawn values and reruns the technical, economic, environmental and TOPSIS chain for **every** volume of the sweep;
4. it gathers the N realisations into statistics per volume and at the chosen volume.

The comparison between volumes is **paired**: in one realisation, every volume faces the same drawn assumptions, and the difference between two of them is an effect of the volume, not of the draw. This is what allows counting how often each volume wins. The volume grid is that of the study, and the program stops the analysis if it changes between realisations.

7.5.2. The statistics

The percentiles are empirical, computed over the realisations; the standard deviation is the sample one, and the coefficient of variation the ratio between it and the magnitude of the mean. The probabilities come with Wilson's (1927) 95% interval. Sensitivity is Spearman's (1904) ρ, with ties at the mean rank. The share of variance explained is the correlation ratio η^2, the variance between class means divided by the total variance; the classes are the deciles of the drawn variable, or its own values when it has up to ten distinct values, as for the number of occupants. It is the class-based estimator of the first-order index (Saltelli et al., 2008), computed from the same realisations at no extra cost.

Convergence is tracked by the cumulative mean of the net present value at the chosen volume and its 95% interval, whose half-width is 1.96 times the standard deviation divided by the square root of the number of realisations. The band narrows with the inverse square root of N: quadrupling the realisations halves the sampling uncertainty. If the band still oscillates at the end of the curve, increase N before publishing.

7.5.3. Limits

- **The variables are independent.** The program imposes no correlation between them. In many projects this is reasonable; when two assumptions move together — more occupants and more outdoor demand, for instance — drawing them independently widens the band beyond reality in some combinations and narrows it in others.
- **The uncertainty is the declared one.** The output band is never more reliable than the input distributions. The screening values are generic; adjust them with data from the building, from metering or from the literature, and declare the source.
- **Rainfall varies by factor.** The rainfall factor scales the whole series and preserves its temporal structure — the sequence of dry and rainy days. A change in that structure, or a different climate scenario, is not drawn: compare them by running the modulation once for each series. The effect of series length has its own study (section 2.2).
- **What is not in the catalogue stays fixed.** The price of each material separately, the pump parameters, the chlorine dose and the other assumptions follow the study. The sensitivity analysis of section 3.7

covers the missing ones, one at a time.

- **Class-based η^2 is biased.** With k classes and N realisations, it overestimates the explained share by about $(k - 1)/N$ — 0.009 with ten classes and a thousand realisations. Values of that order do not distinguish a variable with no effect.

Probabilistic modulation gives the uncertainty of the result from the uncertainty of the assumptions; it is not a validation of the model, which section 5.3 discusses. For an introduction to the method and its variants — stratified sampling, variance-based sensitivity indices — see Saltelli et al. (2008).

Appendices

Appendix A — The project parameters

There are **119 parameters**. This is the complete list of what a project stores in this edition, with the exact name of each field inside the `.triton` file.

The list was not transcribed by hand: it is extracted from the program itself for each version, and therefore cannot diverge from it.

The column **where it is entered** says on which screen the field appears; the column **who consumes it** says which calculation uses it. A field with neither is a field stored in the file and never read, and is listed in section 5.2.

The defaults are those of the project the International Edition opens with. Costs, prices, tariffs and the rainfall series start empty or at zero: you enter them, in the currency of the project, and the program never assumes a currency. A dash means that the field has no starting value.

The project file also holds 4 fields that belong to national schemes of other editions. They have no effect in this one and are not listed.

A.1. Identification

3 parameters.

Table 164 — Project parameters: identification

Parameter	Default	Unit	Where it is entered	Who consumes it
`project_name`	New Triton project	—	Export, Main window, Reports	Automation, CAD and BIM, Reports, Spreadsheets
`project_id`	—	—	Main window, Reports	Automation
`created_at`	—	—	Main window	—

A.2. Rainfall

9 parameters.

Table 165 — Project parameters: rainfall

Parameter	Default	Unit	Where it is entered	Who consumes it
`precip_file`	—	—	Main window, Project	Automation, Scenarios, Spreadsheets
`climate_source_mode`	custom_file	—	Main window, Project, Reports	Automation
`climate_city_uf`	—	—	Main window, Project, Reports	Automation
`climate_city_name`	—	—	Main window, Project, Reports	Automation
`climate_model`	—	—	Main window, Project, Reports	Automation
`climate_scenario`	—	—	Main window, Project, Reports	Automation
`climate_start_date`	1980-01-01	—	Main window, Project, Reports	Automation
`climate_end_date`	2013-12-31	—	Main window, Project, Reports	Automation
`start_date`	1980-01-01	—	Export, Main window, Project, Tariffs and costs	Automation, Climate, Spreadsheets

Notes from the code:

- `climate_source_mode`: "custom_file" (own file): in this edition the rainfall series always comes from a file of the user

A.3. Catchment

7 parameters.

Table 166 — Project parameters: catchment

Parameter	Default	Unit	Where it is entered	Who consumes it
`discard`	—	mm	Charts, Documentation, Environmental, Main window, Project, Quality, Reports	Automation, CAD and BIM, LCA, Reports, Scenarios, Spreadsheets, Treatment line
`discard_mode`	1	code	Main window, Project, Sweep	Automation, Daily balance, Scenarios
`discard_days_interval`	7	days	Main window, Project, Sweep	Automation, Daily balance, Scenarios
`area`	100	m²	Building, Charts, Documentation, Environmental, Main window, Quality, Reports, Sweep, Tariffs and costs	Automation, CAD and BIM, Daily balance, LCA, Reports, Scenarios, Spreadsheets, Treatment line
`irrigation_garden_area_m2`	0	m²	—	—
`runoff_coeff`	—	—	Building, Main window, Quality, Sweep	Automation, Daily balance, Scenarios, Spreadsheets
`first_flush_system_enabled`	no	—	Environmental, Quality	Automation, LCA, Treatment line

Notes from the code:

- `discard`: mm
- `discard_mode`: 1 = every event, 2 = first event after a dry spell, 3 = every X days
- `discard_days_interval`: interval for mode 3
- `area`: m^2
- `irrigation_garden_area_m2`: Garden area in m^2 for the sizing wizard
- `runoff_coeff`: see hydrology_defaults

A.4. Building

2 parameters.

Table 167 — Project parameters: building

Parameter	Default	Unit	Where it is entered	Who consumes it
`num_economias`	1	units	Building, Environmental	Automation, Economic
`building_template_id`	res_medio	—	Building	Automation, Tariffs

Notes from the code:

- `num_economias`: Number of dwelling units / apartments with individual metering

A.5. Demand

17 parameters.

Table 168 — Project parameters: demand

Parameter	Default	Unit	Where it is entered	Who consumes it
demand_type	0	code	—	—
demand_mode	constant	—	Building, Environmental, Main window, Reports, Sweep	Automation, Daily balance
demand_value	200	L/day	Documentation, Economic, Main window	Automation, Daily balance
demand_monthly	—	—	Main window	Automation
residents_type	0	code	—	—
residents_count	4	residents	Economic, Environmental, Main window	Automation, Daily balance, Pump set
residents_monthly	—	—	Main window	Automation
potable_indoor_share	0.6	fraction	Building, Main window	Automation
non_potable_indoor_share	0.4	fraction	Building, Main window	Automation, Daily balance
rainwater_share	0.4	fraction	Documentation, Main window, Sweep	Automation, Daily balance, Scenarios, Spreadsheets
weekly_demands	—	—	Building, Main window, Sweep	Automation, Daily balance
weekly_residents	—	—	Building, Main window, Sweep	Automation, Daily balance
weekly_shares	—	—	Building, Main window, Sweep	Automation, Daily balance
monthly_shares	—	—	Building, Main window, Sweep	Automation, Daily balance
daily_demands	—	—	Building, Main window, Sweep	Automation, Daily balance
daily_residents	—	—	Building, Main window, Sweep	Automation, Daily balance
daily_shares	—	—	Building, Main window, Sweep	Automation, Daily balance

Notes from the code:

- demand_mode: "constant", "weekly", "monthly", "daily"
- demand_value: L/day, per resident or total
- potable_indoor_share: Potable fraction of indoor consumption; 1 – non_potable_indoor_share
- non_potable_indoor_share: Non-potable fraction of indoor consumption (toilets, washing machine); see fracao_atendivel
- rainwater_share: fraction from 0 to 1 (0.4 = 40%)

A.6. Irrigation

4 parameters.

Table 169 — Project parameters: irrigation

Parameter	Default	Unit	Where it is entered	Who consumes it
irrigation_liters_per_day	0	L/day	Building, Environmental, Main window, Reports	Automation, Daily balance
irrigation_rain_threshold_mm	2	mm/day	Building, Main window	Automation, Daily balance
irrigation_potable_backup	yes	—	Building, Main window	Automation, Daily balance
irrigation_rate_l_m2_day	3	L/m²·day	—	—

Notes from the code:

- `irrigation_liters_per_day`: Outdoor demand (watering, washing outdoor areas), L/day
- `irrigation_rain_threshold_mm`: Daily precipitation threshold that suppresses irrigation (mm/day)
- `irrigation_potable_backup`: If True, the mains supplies irrigation on dry days when the cistern runs dry
- `irrigation_rate_l_m2_day`: Daily watering rate ($L/m^2/day$)

A.7. Water quality

9 parameters.

Table 170 — Project parameters: water quality

Parameter	Default	Unit	Where it is entered	Who consumes it
`water_quality_target_class`	classe_1	—	Environmental, Quality	Automation, LCA, Treatment line
`water_quality_disinfection`	cloro	—	Environmental, Quality	Automation, LCA, Treatment line
`water_quality_polishing`	no	—	Environmental, Quality	Automation, LCA, Treatment line
`etap_enabled`	yes	—	Economic, Environmental, Optimiser	Automation, LCA, Treatment line
`chlorine_treatment_enabled`	yes	—	Economic, Environmental, Optimiser, Quality	Automation, Economic, LCA
`chlorine_dose_mg_l`	—	mg Cl_2/L	Economic, Environmental, Optimiser, Quality	Automation, Economic, LCA, Reports, Treatment line
`chlorine_product_purity`	—	kg/kg	Environmental, Quality	Automation, Economic, LCA, Treatment line
`chlorine_cost_per_kg`	0	currency/kg	Economic, Optimiser, Quality	Automation, Economic, Prices, Treatment line
`chlorine_co2_kg_per_kg`	—	kg CO_2e/kg	Environmental, Quality	Automation, LCA, Treatment line

Notes from the code:

- `water_quality_disinfection`: "cloro" (chlorine), "uv", "ozonio" (ozone), "nenhum" (none)
- `chlorine_dose_mg_l`: mg of active Cl2 per litre
- `chlorine_product_purity`: kg of active Cl2 per kg of product
- `chlorine_cost_per_kg`: price per kg of commercial PRODUCT, in the currency of the project

A.8. Tanks

13 parameters.

Table 171 — Project parameters: tanks

Parameter	Default	Unit	Where it is entered	Who consumes it
upper_tank_vol	500	L	Economic, Environmental, Export, Main window, Optimiser, Pump wizard, Reports, Sweep, Tariffs and costs, Upper tank	Automation, CAD and BIM, Daily balance, Multi-criteria, Prices, Scenarios, Spreadsheets
upper_tank_used	1	code	Economic, Environmental, Main window, Optimiser, Reports, Sweep, Tariffs and costs	Automation, Daily balance, LCA, Prices, Pump set, Scenarios, Spreadsheets
lower_tank_max	10000	L	Main window, Sweep	Automation, Daily balance, Scenarios, Spreadsheets
lower_tank_step	250	L	Main window, Sweep	Automation, Daily balance, Scenarios, Spreadsheets
lower_tank_mode	1	code	Main window, Sweep	Automation
lower_tank_fixed	2000	L	Main window, Sweep, Tariffs and costs	Automation
delta_ideal	5	%/m³	Main window, Optimiser, Sweep	Automation, Scenarios
econ_lower_tank_vol	2000	L	Economic, Environmental, Sweep, Tariffs and costs	Automation
lower_tank_material	PEAD	—	Economic, Optimiser, Tariffs and costs	Automation, LCA, Prices
upper_tank_material	PEAD	—	Economic, Optimiser, Tariffs and costs	Automation, LCA, Prices
cost_lower_tank	0	currency	Economic, Sweep, Tariffs and costs	Automation, Economic, Prices
cost_lower_tank_per_m3	0	—	Tariffs and costs	Prices
cost_upper_tank	0	currency	Economic, Sweep, Tariffs and costs	Automation, Economic

Notes from the code:

- upper_tank_vol: L
- upper_tank_used: 0 = no upper tank, 1 = with upper tank
- lower_tank_max: L
- lower_tank_step: L
- lower_tank_mode: 0 = fixed volume, 1 = sweep
- lower_tank_fixed: used in fixed-volume mode
- delta_ideal: marginal-gain threshold for the ideal volume, in %/m³
- lower_tank_material: "PEAD" (HDPE), "CONCRETO" (concrete), "FIBRA" (GRP), "ACO_INOX" (stainless steel)
- upper_tank_material: "PEAD" (HDPE), "CONCRETO" (concrete), "FIBRA" (GRP), "ACO_INOX" (stainless steel)

A.9. Pump set

18 parameters.

Table 172 — Project parameters: pump set

Parameter	Default	Unit	Where it is entered	Who consumes it
pumping_threshold	50	L	Main window, Sweep	Automation, Daily balance, Scenarios, Spreadsheets
supply_arrangement	—	code	Economic, Environmental, Sweep	Automation, Economic, LCA, Pump set
pressurizer_pressure_m	18	m head	Sweep	Pump set
pressurizer_starts_per_person_day	5.05	1/person·day	Sweep	Pump set
pressurizer_model	—	code	Sweep	Pump set
pressurizer_point_flow_l_min	9	L/min	Sweep	Pump set
pressurizer_power_kw	0.18	kW	Sweep	Pump set
pressurizer_flow_l_min	13.3	L/min	Sweep	Pump set
pressurizer_post_run_s	0	s	Sweep	Pump set
pump_count	2	units	Economic, Environmental, Optimiser, Reports, Tariffs and costs	Automation, Economic, LCA, Prices, Reports
pump_power_str	1/2	—	Reports	—
pump_power_kw	0.36775	kW	Charts, Economic, Optimiser, Reports, Sweep, Tariffs and costs	Automation, CAD and BIM, Economic, Prices, Pump set, Reports
pump_manometric_head_m	0	m head	Sweep	Automation, Pump set
pump_efficiency	0	%	Charts, Sweep, Tariffs and costs	Automation, Pump set
pump_flow_rate	0	L/h	Charts, Economic, Optimiser, Reports, Sweep, Tariffs and costs	Automation, Pump set
pump_startup_time_h	0.03	h	Charts, Economic, Optimiser, Tariffs and costs	Automation, Pump set
pump_motor_efficiency	0	%	Tariffs and costs	Automation, Pump set
pump_unit_cost	0	currency	Economic, Optimiser, Sweep, Tariffs and costs	Automation, Economic, Prices

Notes from the code:

- pumping_threshold: L, pump trigger level
- pump_count: duty + standby as the recommended initial configuration
- pump_power_kw: kW (1 hp (metric) = 0.7355 kW; 1/2 hp = 0.36775 kW)
- pump_efficiency: %, 0 = deduce from the size
- pump_startup_time_h: h
- pump_motor_efficiency: %
- pump_unit_cost: price of one pump set, in the currency of the project (zero until you enter it)

A.10. Piping

1 parameter.

Table 173 — Project parameters: piping

Parameter	Default	Unit	Where it is entered	Who consumes it
pipes_list	—	—	Economic, Tariffs and costs	Automation, LCA

A.11. Investment

3 parameters.

Table 174 — Project parameters: investment

Parameter	Default	Unit	Where it is entered	Who consumes it
cost_labor	0	currency	Economic, Sweep, Tariffs and costs	Automation, Economic
cost_piping	0	currency	Economic, Sweep, Tariffs and costs	Automation, Economic
cost_accessories	0	currency	Economic, Sweep, Tariffs and costs	Automation, Economic, Treatment line

A.12. Operation

1 parameter.

Table 175 — Project parameters: operation

Parameter	Default	Unit	Where it is entered	Who consumes it
op_costs	—	—	Economic, Optimiser, Sweep, Tariffs and costs	Automation, Economic

A.13. Tariffs

17 parameters.

Table 176 — Project parameters: tariffs

Parameter	Default	Unit	Where it is entered	Who consumes it
`tariff_customized`	no	—	Project	—
`water_tariffs`	—	—	Project, Sweep, Tariffs, Tariffs and costs	Economic
`tariff_city_uf`	custom	—	Main window, Project, Reports, Tariffs, Tariffs and costs	—
`tariff_city_name`	custom	—	Main window, Project, Reports, Tariffs, Tariffs and costs	Automation
`tariff_vigencia`	—	—	Project, Tariffs and costs	—
`tariff_category`	residencial	—	Economic, Tariffs, Tariffs and costs	Tariffs
`sewage_rate`	100	% of water	Project, Tariffs, Tariffs and costs	Automation, Economic, Tariffs
`sewage_mode`	1	code	Economic, Optimiser, Project, Tariffs, Tariffs and costs	Automation, Economic, Tariffs
`sewage_tariffs`	—	—	—	Economic, Tariffs
`sewage_volume_factor`	1	—	—	Automation, Economic, Tariffs
`water_tax_fixed`	0	currency/month	Tariffs and costs	Automation, Economic
`water_tax_var`	0	%	Tariffs and costs	Automation, Economic
`tariff_escalation`	12	months	Economic, Optimiser, Sweep, Tariffs and costs	Automation, Economic
`water_tariff_escalation`	5	% per period	Economic, Optimiser, Sweep, Tariffs and costs	Automation, Economic
`sewage_tariff_escalation`	5	% per period	Economic, Optimiser, Tariffs and costs	Automation, Economic
`elec_tariff_escalation`	5	% per period	Economic, Optimiser, Sweep	Automation, Economic
`elec_tariff`	0	currency/kWh	Charts, Economic, Optimiser, Project, Reports, Sweep, Tariffs and costs	Automation, Economic

Notes from the code:

- `tariff_category`: category of the tariff table applied; "personalizada" (custom) when typed in
- `sewage_mode`: 0 = fixed amount, 1 = percentage of the water part, 2 = amount per m^3 consumed, 3 = tiers
- `water_tax_fixed`: currency per month
- `water_tax_var`: %
- `tariff_escalation`: months; length of the escalation period
- `water_tariff_escalation`: % per escalation period; with 12 months, % per year
- `sewage_tariff_escalation`: % per escalation period; with 12 months, % per year
- `elec_tariff_escalation`: % per escalation period; with 12 months, % per year
- `elec_tariff`: price of electricity per kWh, in the currency of the project (zero until you enter it)

A.14. Energy

4 parameters.

Table 177 — Project parameters: energy

Parameter	Default	Unit	Where it is entered	Who consumes it
elec_city_uf	custom	—	Main window, Project, Tariffs and costs	—
elec_city_name	custom	—	Main window, Project, Tariffs and costs	—
elec_tax_fixed	0	currency/month	Tariffs and costs	Automation, Economic
elec_tax_var	0	%	Tariffs and costs	Automation, Economic

Notes from the code:

- elec_tax_fixed: currency per month
- elec_tax_var: %

A.15. Financial

4 parameters.

Table 178 — Project parameters: financial

Parameter	Default	Unit	Where it is entered	Who consumes it
inflation	0.2	% per month	Documentation, Economic, Optimiser, Sweep, Tariffs and costs	Automation, Economic
analysis_period_years	20	years	Economic, Optimiser, Reports, Sweep, Tariffs and costs	Automation, Economic, LCA, Reports
tma	2	% per month	Economic, Optimiser, Sweep, Tariffs and costs	Automation, Economic
install_month	0	month	—	—

Notes from the code:

- inflation: % per month; inflation of O&M costs
- analysis_period_years: years
- tma: % per month; minimum attractive rate of return

A.16. Certifications

1 parameter.

Table 179 — Project parameters: certifications

Parameter	Default	Unit	Where it is entered	Who consumes it
edge_base_case_l_person_day	0	L/person·day	Environmental	—

A.17. Other

6 parameters.

Table 180 — Project parameters: other

Parameter	Default	Unit	Where it is entered	Who consumes it
`phi_operation_rule`	—	—	Main window, Sweep	Automation, Daily balance, Spreadsheets
`data_base_estudo`	—	—	Tariffs and costs	—
`precos_de_catalogo`	no	—	Economic, Optimiser, Pump wizard, Quality, Sweep, Tariffs and costs	Automation, Prices, Treatment line
`bim_layout`	—	—	Export, Main window	—
`capex_do_arranjo`	no	—	Main window, Sweep, Tariffs and costs	Treatment line
`mao_de_obra_automatica`	no	—	Main window, Sweep, Tariffs and costs	—

Appendix B — The program's processes

There are **24 processes**, from the rainfall file to the report. Each one declares what triggers it, what it receives, the rules with their branches, what it produces and what happens when it fails.

It is the most technical appendix of the manual, and it serves two people: whoever reviews a study made with the program and needs to know exactly which calculation was done, and whoever found a strange result and wants to know where the number went through.

The names in `code` are the project file fields, listed in appendix A.

B.1. PROC-01 — Load the precipitation series

Rainfall

Trigger. Project tab: open a rainfall file (CSV), or load a series stored in a project.

Inputs

- Daily CSV file, in millimetres per day (the series that ships in `data/rainfall`, or your own)
- `climate_start_date` and `climate_end_date`, which trim the series
- `start_date`, the date of the first day of the series

Rules

1. The series becomes a `numpy` vector of millimetres per day; the vector index is the day, and the date only serves to know the weekday and the month.
2. An incomplete year is dropped on reading, so as not to bias annual totals.
3. The series is always a file of the user: the edition ships three example series in `data/rainfall` (ERA5 reanalysis) and no regional rainfall database.

Outputs

- `precip_data`: vector of mm/day, which is the input of **two** distinct processes — PROC-04 (first flush and collection) and PROC-03 (irrigation suppression)

Exception. An unreadable file or one without a rainfall column stops loading with a message; the simulation does not run on an empty series.

B.2. PROC-02 — Build the daily demand

Demand

Trigger. Start of the simulation, once per run.

Inputs

- `demand_mode`: constant, weekly, monthly or daily
- `demand_value` (L/day per person), `residents_count`
- `rainwater_share` or `non_potable_indoor_share`
- vectors `weekly_*`, `monthly_*`, `daily_*` when the mode uses them

Rules

1. Base demand of the day = `demand_value × residents_count`, with the multiplier of the weekday, month or day, depending on the mode.
2. The non-potable fraction splits the demand in two: indoor potable and indoor non-potable.

3. When the mode is weekly, monthly or daily, the fraction comes from the period vector itself; otherwise `non_potable_indoor_share` applies, and only then `rainwater_share`.
4. A null or zero value at any position of the vector falls back to the constant value.

Outputs

- `tot_arr`: total demand of the day
- `pot_in_arr`: indoor potable, which rain never supplies
- `non_pot_in_arr`: indoor non-potable, rain priority 1
- `pluv_arr` = indoor non-potable + active irrigation

Exception. An unreadable start date falls back to 01/01/1980 instead of stopping, because it only affects the weekday.

B.3. PROC-03 — Suppress irrigation on rainy days

Demand

Trigger. Demand composition, one test per day of the series.

Inputs

- `irrigation_liters_per_day`
- `irrigation_rain_threshold_mm` (default 2 mm/day)
- `precip_data`, the **same** vector that feeds the collection

Rules

1. If the day's rain ≥ threshold, the day's irrigation is **zero** and the day is counted as suppressed.
2. Otherwise, the day's irrigation is the nominal volume.
3. It is the second reading of the rainfall file, independent of the first: a day can suppress irrigation and still yield collection.

Outputs

- `irr_arr`: irrigation of the day
- `irr_suppressed_mask`: suppressed days, which become `total_irrigation_days_suppressed` in the result

Exception. Without an irrigation volume, the vector is zero and the mask is false on every day.

B.4. PROC-04 — Divert the first flush

Water balance

Trigger. Every day with rain, inside the daily loop.

Inputs

- `precip_mm` of the day
- `discard_mm`
- `discard_mode` (1, 2 or 3)
- `discard_days_interval`

Rules

1. **Mode 1**: diverts on every rain event.
2. **Mode 2**: diverts only on the first event after a dry spell, defined as a previous day with less than 1 mm.
3. **Mode 3**: diverts when `discard_days_interval` days have passed since the last diversion.

4. When the diversion applies: `p_eff = p − discard_mm` if `p > discard_mm`, otherwise **zero**: all the day's rain goes to the diverter.
5. When it does not apply: `p_eff = p`, the whole rain is usable.

Outputs

- `p_eff`: effective depth of the day, in mm, which goes **only** to PROC-05
- `eff_precip_mm` in the detailed daily series, when it is kept

Exception. A negative first-flush depth is rejected at the validation gate, before the loop.

B.5. PROC-05 — Convert depth into collected volume

Water balance

Trigger. Every day, after the first flush.

Inputs

- `p_eff` from PROC-04
- `area` (m^2)
- `runoff_coeff`

Rules

1. `v_ac = p_eff × area × runoff_coeff`, in litres.
2. This is where the rainfall file becomes volume, and the only place where it happens.
3. The coefficient is dimensionless and lies in [0, 1]; outside it the simulation does not start.

Outputs

- `v_ac`: volume collected in the day, which goes to PROC-06
- `harvested_liters` in the daily series

Exception. A negative area or a coefficient outside [0, 1] raises `ValueError` naming the field, in PROC-11.

B.6. PROC-06 — Store and overflow

Water balance

Trigger. Every day, after collection.

Inputs

- `v_ac`
- volume left from the previous day
- `lower_tank_vol`

Rules

1. **Overflow before consumption**, as in the YAS rule; the day's rain, up to the capacity, already supplies the day's demand, which places the model between strict YAS and YBS.
2. `available = v_lower + v_ac`. If it exceeds the capacity, the surplus overflows and the tank is full.
3. The order matters: withdrawing the demand first would let the tank accept water that would physically have overflowed already, overestimating the yield.

Outputs

- `v_spill_today`, summed into `avg_spilled_l_day`, which becomes the overflow criterion in the multi-criteria decision

- `v_in_tank`, the volume available for supply

Exception. Zero volume is valid and represents the no-system scenario; a negative one is rejected.

B.7. PROC-07 — Supply from a single tank

Water balance

Trigger. Every day, when there is no upper tank.

Inputs

- `v_in_tank`
- `pluvial_demand_per_day` from PROC-02

Rules

1. `v_c = min(rainwater demand, volume in the tank)`.
2. The remaining volume stays for the next day: `v_lower = v_in_tank − v_c`.

Outputs

- `v_c`: rainwater volume consumed in the day

Exception. None: the minimum already handles an empty tank and a null demand.

B.8. PROC-08 — Supply with pumping to an upper tank

Water balance

Trigger. Every day, when `upper_tank_used` and the upper volume is positive.

Inputs

- `v_lower`, `v_upper`
- `upper_tank_vol`
- `pumping_threshold`, the reserve volume that is not consumed

Rules

1. Loop until the demand is met or the water runs out.
2. First consumes from the upper tank what lies **above** the pump trigger level.
3. If something is still missing and there is water below, starts the pump: transfers `min(v_lower, free space above)`, counts **one cycle** and records the batch.
4. After pumping, consumes again.
5. The trigger level is capped at the upper tank volume at the start of the process.

Outputs

- `v_c`
- `v_rec_today`, summed into `total_pumped_liters`
- `cycles_today`, summed into `total_pump_cycles`
- `max_pump_batch_liters`

Exception. A negative upper volume is rejected at validation. The loop has a guaranteed exit: if there is no water below or above, it stops.

B.9. PROC-09 — Split the supply and top up with potable water

Water balance

Trigger. Every day, after supply.

Inputs

- `v_c`
- `non_pot_in_day`
- `irr_day`
- `pot_in_day`
- `irrigation_potable_backup`

Rules

1. **Priority 1**, indoor non-potable use: `c_pluv_in = min(v_c, indoor non-potable)`.
2. **Priority 2**, irrigation: `c_pluv_irr = min(v_c − c_pluv_in, irrigation of the day)`.
3. The potable water consumed is the sum of three parts: the indoor potable, the deficit of the indoor non-potable and — only if the backup supply is on — the irrigation deficit.
4. With the backup supply off, the garden is simply not watered on the dry day, and the mains is not used.

Outputs

- `potable_consumed_liters` of the day
- `avg_pluvial_indoor_consumed_l_day` and `avg_pluvial_irrigation_consumed_l_day`, which separate indoor from outdoor use for credits WEc1 and WEc2 of LEED v4 and Options 2 and 4 of WEc2 of LEED v5

Exception. None: all parts are minima and maxima with zero.

B.10. PROC-10 — Classify the day's supply

Water balance

Trigger. Every day, at the end of supply.

Inputs

- `v_c`
- `pluvial_demand_per_day`

Rules

1. **Full** when the consumption equals the rainwater demand, with a tolerance of 10^{-5} L.
2. **Partial** when something was consumed, but less than the demand.
3. **Null** when nothing was consumed.

Outputs

- `pct_days_full_satisfaction`, `pct_days_partial_satisfaction` and `pct_days_null_satisfaction`, which are the system's time reliability

Exception. None.

B.11. PROC-11 — Validate the physical input

Water balance

Trigger. First line of `run_single_simulation`, before any calculation.

Inputs

- lower and upper volume
- area

- runoff coefficient
- first-flush depth
- daily demand
- rainwater fraction

Rules

1. Negative volume, negative area, negative first flush and negative demand are refused.
2. Runoff coefficient and rainwater fraction must lie in [0, 1].
3. **Zero volume remains valid**: it is the «no system» reference of the sweep.
4. The message names the field and the value received, instead of silently correcting it.

Outputs

- No output: it either passes or raises `ValueError`

Exception. It is the handling itself. Before this gate, a volume of −1,000 L returned −166.67% saving, and the number went on to the economic analysis, the LCA and the report.

B.12. PROC-12 — Aggregate the period and compute the indicators

Water balance

Trigger. End of the daily loop.

Inputs

- loop accumulators
- `n_days`

Rules

1. **Saving potential** = rainwater consumed in the period ÷ total demand in the period × 100.
2. The daily means divide the totals by the number of simulated days.
3. Conversions to a year use **365.25** days, not 365, to absorb the leap years of the series.
4. The potential always lies in [0, 100] — an invariant the validation gate exists to guarantee.

Outputs

- `SingleTankSimulationResult`, with 21 fields, which is the object **all** downstream modules consume

Exception. A null total demand returns zero potential instead of dividing by zero.

B.13. PROC-13 — Sweep volumes and find the ideal volume

Water balance

Trigger. Sweep tab: simulate button.

Inputs

- `lower_tank_max`
- `lower_tank_step`
- `delta_ideal` (%/m^3)

Rules

1. The discrete grid rounds the step **up** to a multiple of 250 L, the commercial quantum of tanks, and limits it to 40 positive volumes.

2. The maximum volume entered is always kept as the last point, so that only the last interval can be smaller than the step.
3. Zero enters the grid as the reference alternative.
4. Runs PROC-04 to PROC-12 once per volume.
5. The **ideal volume** is the first whose marginal gain `Δpotential/Δm³` falls below the threshold: from there on, more storage does not pay.

Outputs

- `SweepSimulationResult`: one result per volume, the ideal volume, and the record that the step was adjusted
- The list of volumes is the list of multi-criteria **candidates**

Exception. A step larger than the maximum returns a one-point grid. The step adjustment is recorded in `step_adjusted`, not silenced.

B.14. PROC-14 — Compute the rainfall indices

Rainfall

Trigger. Charts tab and research report.

Inputs

- `precip_data`
- dates of the series

Rules

1. Nine indices: PRCPTOT, R95p, RX1day, RX5day, SDII, R20mm, CDD, CWD and the Walsh and Lawler seasonality index.
2. The set is **not** pure ETCCDI: seasonality is not in the set, and R10mm, which is, is missing.
3. The 95th percentile is computed over the **whole loaded series**, not over the fixed 1961–1990 base of ETCCDI.
4. RX5day uses `min_periods=1`, so the first windows of the year have 1 to 4 days.

Outputs

- Nine annual series, for chart and report

Exception. A series shorter than one year returns the indices that can be computed, without stopping.

B.15. PROC-15 — Size the treatment plant

Quality and treatment

Trigger. A change in the Water Quality tab, or the start of the economic analysis and the LCA.

Inputs

- `water_quality_target_class` (4 use classes)
- `water_quality_disinfection`: chlorine, ultraviolet or ozone
- `water_quality_polishing`, polishing filter
- `annual_pluvial_m3` from PROC-12
- `area`
- chlorine dose, purity, price and CO_2 factor
- `discard` and `first_flush_system_enabled`, for the first-flush diverter

Rules

1. The target class defines the mandatory stages; the chosen disinfection defines the equipment and the running cost.
2. The polishing filter is applied **if and only if** ticked; when the class would recommend it and the user declines, this is recorded in `polishing_recommended_but_declined` instead of being imposed.
3. What is bought is the **product** — tablets with 65% active chlorine — not pure chlorine. Charging the mass of active chlorine, rather than that of the product, underestimates the cost by about 35%.
4. **Incremental rule**: the CAPEX of the line deducts the generic treatment allowance already included in «Accessories», and the running cost deducts chlorination, which the cash flow already pays. The rule lives in one place, consumed by **both** economic engines.
5. With `first_flush_system_enabled`, the first-flush diverter, of volume `discard × area`, enters the CAPEX and the running cost of the line.
6. In the LCA, the treatment line **replaces** the chlorination term; it never adds to it.
7. With `etap_enabled = False`, the treatment line enters no calculation: not the CAPEX, not the running cost, not the environmental assessment.

Outputs

- `total_etap_capex`, which enters the CAPEX
- `total_etap_annual_opex`, which enters the running cost
- `total_etap_co2e_kg_yr`, which replaces chlorination in the LCA
- `disinfection_stages`, shown in the report

Exception. A purity outside (0, 1] is refused by the validator of the chlorination chain.

B.16. PROC-16 — Compute the pumping energy

Pump set

Trigger. Economic analysis and LCA, from the same simulation result.

Inputs

- `supply_arrangement`: pumping to an upper tank, direct pressurisation or gravity
- `total_pumped_liters` and `total_pump_cycles` from PROC-08
- `pressurizer_pressure_m`, `pressurizer_starts_per_person_day`, `residents_count`
- `pump_power_kw`, `pump_efficiency`, `pump_flow_rate`
- `pump_manometric_head_m`
- `pump_startup_time_h`

Rules

1. The arrangement decides what is pumped. **Pumping to an upper tank**: the volume sent to the upper tank. **Direct pressurisation**: all the rainwater consumed, with the working pressure in place of the head and no start-up energy. **Gravity**: nothing. It is the only source of kWh of the economic analysis and the LCA.
2. Specific energy `e = ρgH/(η_pump·η_motor)` per m^3 pumped, or `P/(Q·η_motor)` when the flow rate is declared.
3. Nameplate power is shaft power and **already includes** the pump efficiency; that is why `P × hours / η_pump` counts that efficiency twice, and what is missing is to divide by the motor efficiency, entered by the user or taken from the typical value for the rated power. Four copies of that old formula survived in the program and overestimated consumption by 1.68 times — the worst of them ranked volumes in the

multi-criteria decision.

4. Start-up energy is added separately, by the number of cycles.
5. Flow rate and efficiency not entered fall back to typical values **for the chosen power**, not to fixed constants.

Outputs

- `annual_kwh`, which becomes cost in the economic analysis and emission in the LCA
- `pump_hours_year`, `annual_cycles`

Exception. Gravity arrangement, an arrangement not stated in an old project, or zero power: the energy is zero.

B.17. PROC-17 — Compute the water and sewage bill

Economic

Trigger. Twice per projected month: with and without harvesting.

Inputs

- monthly volume in litres
- `water_tariffs`: quadruples (minimum, maximum, value, code)
- `sewage_mode` and `sewage_rate`
- fixed and variable taxes
- `num_economias`

Rules

1. Consumption is evaluated **at the level of one dwelling unit** and multiplied by the number of units, so as not to distort the progressive blocks in a building with individual metering.
2. Code **1** or **0**: progressive block, charged only on the volume within it.
3. Code **−1**, availability charge: a fixed value that **adds** on top of the metered consumption.
4. Code **−2**, retroactive allowance: up to the allowance volume the fixed value is paid; beyond it, **all** the volume from zero is charged by the blocks.
5. Code **−3**, payment floor: it does not add, it **bounds from below**. With a floor of 40 currency units and a charged consumption of 55, saving up to 15 reduces nothing — and that is exactly what a rainwater harvesting study needs to see.
6. Sewage is a percentage of the **water part**, not of the total bill: where the sewer charge is 100% of the water charge, it is half the bill.
7. The six tariff regimes are described in appendix D; the user enters the table of the project.

Outputs

- Value of the water and sewage bill per month, for the projection of PROC-18

Exception. An empty table gives a zero bill: the program does not assume a tariff. An incomplete structure is flagged by the validation gate, which separates errors from warnings.

B.18. PROC-18 — Project the cash flow

Economic

Trigger. Economic tab, after the technical simulation.

Inputs

- CAPEX of the five items plus pump and treatment line
- monthly water and sewage saving from PROC-17
- running costs: pumping, chlorination, treatment line and declared operating costs
- `tma`, `inflation`, `analysis_period_years`
- separate escalations for water, sewage and energy, and the interval between them

Rules

1. Water and sewage are escalated by **separate** indices, not by the aggregate bill.
2. Inflation applies only to running costs; tariff escalations apply only to the bill.
3. The escalation is applied every `tariff_escalation` months, in steps.
4. The payback is the first month in which the discounted cumulative cash flow crosses zero.

Outputs

- `vpl`, `tir_monthly_pct`, `tir_annual_pct`, `payback_months`
- `monthly_cash_flows`, month by month
- `annual_pump_kwh`, `annual_chlorine_kg`, `etap_capex_brl`

Exception. A negative monthly saving is truncated at zero before entering the cash flow. An IRR without a real root returns null instead of an invented number.

B.19. PROC-19 — Assess the life cycle

LCA

Trigger. Environmental tab, after the technical simulation.

Inputs

- `tank_vol_liters`
- `annual_pluvial_m3` from PROC-12
- materials and masses of the two tanks
- lengths per pipe diameter
- `pump_count`
- grid electricity factor
- production route of the potable water
- treatment line result from PROC-15

Rules

1. Seven stages: lower cistern, upper tank, piping, pump set, pumping operation, treatment operation and avoided potable water.
2. Zero volume **without** rainwater volume is the no-system scenario, and receives no fixed impact for tank, pipe or pump.
3. The treatment line **replaces** the chlorination term; it does not add to it. Chlorination follows the treatment, not the upper tank.
4. Upper tank only in the pumping arrangement; pump sets in every arrangement with a pump; energy from PROC-16.
5. The avoided water is the water **delivered**, not produced: distribution losses mean that producing 1 m^3 delivers less than 1 m^3, and a factor given at the plant outlet must be converted to the volume delivered. The user enters the emission factor of the water delivered to the building and the factor of the local grid; the edition has no default for either.

6. The carbon payback is the embodied carbon divided by the net annual saving; without a positive net saving, it returns 999 years instead of infinity.

Outputs

- `total_embodied_co2_kg`, `net_annual_avoided_co2_kg`
- `lifetime_net_co2_saved_kg`, which is a multi-criteria criterion
- `environmental_payback_years`
- `inventory_items`, the item-by-item inventory

Exception. A factor without a primary source receives a screening label, and the label is shown — the gap is declared, not hidden.

B.20. PROC-20 — Map onto certifications

ESG and certifications

Trigger. Environmental tab and reports.

Inputs

- `potential_potable_savings_pct`
- annual rainwater and potable volumes
- indoor/outdoor split from PROC-09
- CO_2 avoided over the life cycle
- `area`, for the catchment area of WEM14
- EDGE base case, when declared

Rules

1. **LEED v4**: WEc1 up to 2 points for outdoor use, WEc2 up to 6 points for indoor use, on the official scale. Without an outdoor demand, WEc1 is zero and says why.
2. **LEED v5 BD+C** (rating system of November 2025): WEc2 up to 8 points, by Option 1 (whole project, 30% to 65%, +1 with an alternative source) or by the sum of Options 2 (fixtures and fittings, 30% to 40%), 4 (outdoor, 50% and 100%) and 6 (on-site reuse, 2 points), new construction only. SSc3 recorded as not assessed; its reuse point does not exceed the cap of 3.
3. **EDGE**: **does not score points**. It measures a percentage against a local base case and compares it with 20%, in three independent bars. The advanced level raises the *energy* bar to 40%, not the water one. The program assesses only the water bar, by measure WEM14, and says that the other two are outside its reach.
4. Without a declared base case, EDGE uses the modelled demand and warns that the number is a **floor**.
5. **GRI 303**: avoided withdrawal and circularity rate.

Outputs

- `credit_details`: the credit matrix that feeds the on-screen table and the reports
- `esg_summary_text`
- cards for LEED, EDGE and GRI

Exception. A null total demand returns zero per cent without dividing by zero.

B.21. PROC-21 — Rank volumes by multiple criteria

Multi-criteria

Trigger. Optimiser tab, with the sweep done.

Inputs

- one candidate per sweep volume, each with volumetric reliability, storage efficiency, net financial savings, LCOW, discounted payback, life-cycle CO_2, dry mass and annual overflow
- four dimension weights (technical, economic, environmental, structural) and eight criterion shares, eight criterion weights, or `critic` for objective weights
- tolerance of the choice band, 5% of the score range by default

Rules

1. Eight criteria in four dimensions: **maximise** volumetric reliability, storage efficiency and net financial savings; **minimise** LCOW, payback, CO_2, dry mass and overflow.
2. Each dimension weight is shared among its criteria by the criterion shares (equal by default). Three weights, from version 0.1.0, give the structural dimension their mean; seven values are refused.
3. With `critic`, the weights are computed from the results by the CRITIC method: the contrast of each criterion across the volumes times its independence from the others.
4. A volume that does not pay back receives the worst payback observed plus 10% (at least one year more and at least 20 years); the volume with no cistern receives the worst LCOW plus 10%.
5. Normalisation shifts by `x − min(x)` **before** the vector normalisation of Hwang and Yoon, to admit a negative NPV. It is a deliberate variant, and must be declared as a variant.
6. SMAA-VIKOR draws eight weights, with 25% expected on each dimension, and returns the probabilities of each volume taking each rank.
7. The choice band gathers the volumes whose score lies within the tolerance of the best, on a scale from the worst (0) to the best (1) of the volumes evaluated.
8. Opricovic's conditions C1 and C2 are not implemented.

Outputs

- Ranking of the volumes, distance to the ideal per criterion, choice band and highest score

Exception. A single candidate returns a trivial ranking. A criterion constant across candidates does not contribute to the distance.

B.22. PROC-22 — Save and reopen the project

Project file

Trigger. Save and open menu.

Inputs

- the whole `TritonConfig`, with the fields of appendix A
- interface state
- current analysis

Rules

1. JSON format, in named sections.
2. Reading uses a default value field by field, so an old file keeps opening.
3. `created_at` and `precip_file` describe the act of saving, not the project: that is why they do not come back.
4. It is the fifth crossing of the program — the one that crosses **time** rather than modules. Thirty of the 87 fields of the time did not survive the round trip, including the whole treatment-line choice, the manometric head, the tank materials and irrigation.

Outputs

- `.triton` file
- rebuilt `TritonConfig`

Exception. A section missing from the file falls back to the class defaults. Invalid JSON stops opening with a message.

B.23. PROC-23 — Issue reports and exports

Reports

Trigger. Reports tab; Export tab.

Inputs

- results of PROC-12, PROC-18, PROC-19, PROC-20 and PROC-21
- project data

Rules

1. Three reports: executive, environmental with ESG, and research.
2. Export to CAD and BIM from the sizing.
3. Spreadsheets with the daily series and the sweep.

Outputs

- HTML, PDF, DXF, JSON for BIM and XLSX

Exception. Conversion to PDF tries the Qt engine and falls back to the alternative generator when it is not available.

B.24. PROC-24 — Automation for large-scale studies

Automation

Trigger. The `triton` command line, described in section 3.6; it comes with the installation as a Python package, not with the Windows installer.

Inputs

- project file
- rainfall file

Rules

1. Calls the **same** calculation core as the window, without a screen.
2. Only part of the parameters can be reached through it; the others exist only in the interface, and the way is to build the project in the window and vary by automation only what changes between cases.
3. It serves factorial matrices of thousands of cases and uncertainty propagation by sampling, which are the instruments of the studies published by the group.

Outputs

- JSON and CSV with the results

Exception. A parameter out of range is refused before simulating, with the same validation gate as the interface.

Appendix C — Emission factors

Every factor used by the life cycle assessment, with its provenance, boundary and degree of confidence. The assessment is a **screening** one, not an inventory conforming to ISO 14040 (appendix G).

The International Edition separates the factors in two kinds.

- **User-supplied.** The factor of the electricity grid and the factor of the mains water delivered to the building depend on the place and the year of the project. The edition has no default for either: the fields start empty, and the life cycle assessment is not calculated until you enter them. You must obtain them from the supplier of the project's site or from a local inventory, and declare the source, the year and the boundary.
- **Screening factors of the program.** The factors for tank materials, pipes, the pump set and the treatment consumables are starting values, editable on screen. Each is listed below with the reference the program's source records for it. These references have not been re-verified for this edition of the manual (pending, see below), so treat every value as a screening assumption and replace it by an Environmental Product Declaration (EPD) of the product you specify whenever one exists.

C.1. User-supplied factors

Table 181 — Emission factors that the user supplies, and what to declare for each

Factor	Unit	Default	What to declare
electricity grid	kg CO_2e/kWh	none (empty)	source, **year**, whether it is CO_2 or CO_2e, and whether it covers generation only or also losses and upstream fuel
mains potable water delivered to the building	kg CO_2e/m³	none (empty)	source, boundary, and whether the figure is per m³ **delivered** or per m³ produced
tank material, when you replace the preset	kg CO_2e/kg and kg/m³	see below	source, version, boundary of the product system

The boundary is per cubic metre delivered to the building, not per cubic metre produced at the works. A factor given at the outlet of the works must be divided by the share of the produced volume that reaches the building (one minus the distribution losses of the supplier), or the avoided emission is underestimated.

The grid factor changes every year, and a study without the year declared cannot be reproduced. A factor for CO_2 alone and a factor for CO_2-equivalent are different quantities: a life cycle assessment needs the latter.

C.2. Tank materials

Table 182 — Emission factors of the tank materials, with mass and boundary

Material	Mass per useful m³	Factor	Boundary
high-density polyethylene	22 kg/m³	1.612 kg CO_2e/kg	cradle to gate
reinforced concrete	1,200 kg/m³	0.140 kg CO_2e/kg	cradle to gate
fibreglass	15 kg/m³	3.250 kg CO_2e/kg	cradle to gate
stainless steel AISI 304	38 kg/m³	3.700 kg CO_2e/kg	cradle to gate

The mass per useful cubic metre is what converts tank volume into mass of material. It is that, and not the factor, that makes concrete dominate the inventory: 1,200 kg per cubic metre against 22 for polyethylene. The masses are geometric scenarios of the program, not the weight of a product.

Table 183 — Reference recorded in the program for each tank-material factor, and its status

Material	Reference recorded in the program	Status
polyethylene	Franklin Associates for the American Chemistry Council (October 2020), Cradle-to-Gate Life Cycle Analysis of High-Density Polyethylene (HDPE) Resin, Table 6: 1,612 kg CO_2e per 1,000 kg of resin (TRACI 2.1, IPCC 2013 GWP-100, United States scope)	recorded; re-verification pending
concrete	screening value of 0.14 kg CO_2e/kg; Hammond and Jones (2008, doi:10.1680/ener.2008.161.2.87) publish a concrete value but the exact adopted value is not traced to it	screening, no source traced
fibreglass	Composites UK, Embodied carbon data for composites: typical range 2.5 to 4.0 kg CO_2e/kg; the midpoint is adopted	recorded; re-verification pending
stainless steel	worldstainless (World Steel Association), CO_2 emissions report of 24/09/2024, cradle to gate: 1.95 kg CO_2/kg at 85% scrap, 2.45 at 75%, 3.70 at 50%, 6.80 at 30%; the 50% scrap case is adopted	recorded; re-verification pending

> **Practical consequence, shown in section 4.8:** the material decides the **sign** of the environmental result. With concrete and a twenty-year service life, the tutorial system does not pay off its carbon debt.

C.3. Pipes and pump set

PVC pipe is taken at 2.36 kg CO_2e per kilogram of installed pipe, modules A1 to A3 of an Environmental Product Declaration (EPD Australasia S-P-05503, 25/11/2022, EN 15804+A2), multiplied by the linear mass of the pipe for its nominal diameter. The linear masses are screening values: replace them with the data sheet of the pipe you specify.

The pump set is taken at an intensity of 4.77 kg CO_2e per kilogram of pump, from the Grundfos EPD EPD-GRU-20250340-CBA1-EN (2025, modules A1 to A3), applied to the mass of the pump. Enter the mass of the pump you specify; where you hold the manufacturer's EPD for it, that prevails.

> **Declare it in the study.** The EPD is for a European circulator with on-board electronics, and its reference mass includes the packaging. The intensity per kilogram is an order-of-magnitude approximation, not an inventory of the installed pump.

Status of both references: recorded in the program, re-verification pending.

C.4. Treatment consumables

Table 184 — Emission factors of the treatment consumables

Consumable	Factor
calcium hypochlorite tablet at 65%	1.72 kg CO_2e/kg of product
ultraviolet lamp	grid energy
ozone generator	grid energy

The mass is of **product**, not of active chlorine. Tablets have about 65% active chlorine.

The hypochlorite factor is an approximation from a commercial database (ecoinvent 3.8, *cutoff*, sodium hypochlorite in 15% solution, rest-of-world geography, EF 3.1 *Climate change*: 2.522 kg CO_2e per kg of NaOCl, converted to an active-chlorine basis and to a 65% tablet). It has no calcium hypochlorite process, and the database is not open: the factor is a **screening** value. If you hold an open factor for the product you use, enter

it in the field `chlorine_co2_kg_per_kg`.

C.5. Factors with a screening label

Not every parameter has a primary source, and those without one are marked in the report: the masses per useful cubic metre of polyethylene, concrete and stainless steel, which are geometric scenarios, the concrete factor, the hypochlorite factor, and any factor typed in without a source. Factors you enter without a source also receive the screening label. An inventory that presents all factors with the same degree of confidence hides where the weakness lies.

C.6. What to consult before publishing

1. the EPD or the data sheet of each product you specify;
2. the Documentation tab, life cycle assessment chapter, for the justifications shown to the user;
3. the inventory of the environmental report, which lists each item with the factor applied.

Appendix D — Tariff regimes

The International Edition ships **no tariff catalogue**. You enter the water and sewage tariff of the project, in the currency you choose, and the program calculates the bill with and without the harvesting system. This appendix describes the structure the program accepts, the six regimes it recognises, and the three example tariffs that come with the edition.

D.1. The block codes

Each row of the water tariff table is a quadruple `(minimum, maximum, value, code)`, in m^3 per month and currency per m^3 (or currency per month for the fixed codes).

Table 185 — The block codes of the water tariff table

Code	Meaning
1 or 0	progressive block: charged only on the volume inside it
−1	availability charge: a fixed value per month that adds to the metered consumption
−2	retroactive allowance: up to the allowance the fixed value is paid; beyond it, all the volume from zero is charged by the blocks
−3	payment floor: the bill is not allowed to fall below the value

The effect of each code on the bill is drawn in section 2.7, and is not repeated here.

D.2. The sewage part

Table 186 — The four ways of entering the sewage charge

Mode	The sewage charge is
0	a fixed amount
1	a percentage of the water part (not of the whole bill)
2	an amount per m³ consumed
3	blocks (steps), applied to a fraction of the water volume that you declare

Fixed and variable taxes can be added to the water part and to the electricity part. Tariff escalation is entered separately for water, sewage and energy (appendix A).

D.3. The six regimes

The program classifies a water tariff table into one of six regimes. The regime tells you what saving water is worth, which is what a rainwater harvesting study needs to see.

Table 187 — The six tariff regimes and what happens when saving

Regime	Structure	What happens when saving
No minimum	Progressive blocks only.	Each m³ saved reduces the bill.
Availability charge	A fixed value that **adds** on top of the metered consumption.	Each m³ saved reduces the bill; the fixed part remains.
Allowance in the minimum	The fixed value already includes a volume.	Saving **below** the allowance deducts nothing.
Retroactive allowance	Up to the allowance the fixed value is paid; beyond it, **everything from zero** is charged by the blocks.	Going past the allowance, the whole volume is billed from zero.
Payment floor	The bill does **not** go below the floor.	It does not add: it bounds. Savings that bring the bill under the floor earn nothing.
Exponential formula	Basic service plus `PB × C^n`, with the exponent `n` set by the consumption of the month.	Each m³ saved reduces the bill, but not at a fixed price per m³.

Quick test. Simulate two consumptions, one inside and one outside the minimum block, and compare them with a real bill. If only one matches, the regime is wrong. Section 3.3 teaches the test that identifies a wrong structure.

D.4. The example tariffs that come with the edition

Three example projects (`examples/new_york.triton`, `london.triton` and `cape_town.triton`) carry the water and sewage tariff of their city, as published by the utility and entered by the maintainers on 14/10/2026. They are examples of how to enter a tariff, not a catalogue: tariffs change every year, and you must check the current document of your utility before any economic conclusion. The document address and file signature of each source have not been recorded yet, so each value below is to be confirmed against the utility's current tariff.

D.4.1. New York: NYC Water Board / NYC DEP

Currency USD; effective 01/07/2026 (as stated by the maintainers; confirm).

NYC Water Board and NYC Department of Environmental Protection (DEP), Water and Sewer Rates FY2027, in force from 1 July 2026: water US$ 5.35 per CCF (100 ft3 = 2.8316847 m3), sewer 159% of the water charge, minimum charge US$ 0.49 per day.

Table 188 — Tariff structure of the New York example

Part	From (m³/month)	To (m³/month)	Value	Code
water	0	0	14.9144	-3
water	0	open	1.8893	1
sewage	—	—	159% of the water part	—

Assumptions made when entering it:

- US$ 5.35 per CCF converted at 1 CCF = 2.8316847 m3 (US$ 1.8894 per m3).
- Sewer = 159% of the water charge (percentage of the water parcel, mode 1).
- The US$ 0.49 per day minimum charge is entered as a monthly floor on the water parcel (US$ 0.49 x 30.4375 days = US$ 14.91 per month); it does not bind at the example's consumption.

D.4.2. London: Thames Water

Currency GBP; effective 01/04/2026 (as stated by the maintainers; confirm).

Thames Water, charges 2026-27, metered household: water GBP 2.7346 per m3 and wastewater GBP 1.4721 per m3; standing charges GBP 66.87 per year (water) and GBP 128.13 per year (wastewater; GBP 80.43 with the surface-water drainage rebate). No VAT on household water and sewerage.

Table 189 — Tariff structure of the London example

Part	From (m³/month)	To (m³/month)	Value	Code
water	0	0	5.5725	-1
water	0	open	2.7346	1
sewage	—	—	1.4721 per m³	—
fixed amount, per month	—	—	10.6775	—

Assumptions made when entering it:

- Water standing charge GBP 66.87/12 per month on the water parcel; wastewater standing charge GBP 128.13/12 per month as a fixed amount (it cancels in the saving).
- Wastewater charged on 100% of the metered volume (no return-to-sewer allowance applied: none was supplied). The GBP 80.43 rebate case is not applied.
- Charging year 2026-27 taken to start on 1 April 2026 (inferred; confirm).

D.4.3. Cape Town: City of Cape Town

Currency ZAR; effective 01/07/2026 (as stated by the maintainers; confirm).

City of Cape Town, Tariffs 2026/27, domestic (non-indigent), no restrictions, VAT included, R/kl: water 0-6 kl 25.05; 6-10.5 kl 34.42; 10.5-35 kl 54.60; >35 kl 109.98. Sanitation: 70% of the water consumption, up to 35 kl: 0-4.2 kl 18.28; 4.2-7.35 kl 25.11; 7.35-24.5 kl 42.18; 24.5-35 kl 73.91. Monthly standing charges (domestic 12-20 mm, VAT included): water R 103.65, sanitation R 56.66 (total R 160.31).

Table 190 — Tariff structure of the Cape Town example

Part	From (m³/month)	To (m³/month)	Value	Code
water	0	0	103.65	-1
water	0	6	25.05	1
water	6	10.5	34.42	1
water	10.5	35	54.6	1
water	35	open	109.98	1
sewage (on 70% of the water volume)	0	4.2	18.28	—
sewage (on 70% of the water volume)	4.2	7.35	25.11	—
sewage (on 70% of the water volume)	7.35	24.5	42.18	—
sewage (on 70% of the water volume)	24.5	35	73.91	—
fixed amount, per month	—	—	56.66	—

Assumptions made when entering it:

- 1 kl = 1 m3; prices already include VAT (no extra tax is added).
- Sanitation volume = 70% of the water consumed, charged by the four steps up to 35 kl of sanitation volume; above that nothing more is charged (the cap is read from 'up to 35 kl'; confirm).
- Monthly standing charges (domestic 12-20 mm, VAT included): water R 103.65 on the water parcel and sanitation R 56.66 as a fixed amount (total R 160.31 per month; they cancel in the saving).

- Tariff year 2026/27 taken to start on 1 July 2026 (inferred; confirm).

D.5. Entering your own tariff

1. Take the current tariff document of your water utility and write down its date.
2. Enter the blocks, the fixed charges and the sewage rule in the tariff dialog (stage 5).
3. Check the bill the program calculates against a real bill of the building.
4. Declare in the study the utility, the effective date, the regime and the currency.

Appendix E — Climate database

> **The International Edition ships no regional climate database.** The rainfall series of a project is always a file of the user (section 4.1). Three example series come with the program, so that the manual's cases can be reproduced. The last two sections of this appendix set out the particulars of the edition and describe the data it ships and how far to trust them.

E.1. The series that come with the program

Three daily series are installed in the program's `data/rainfall` folder. They are **reanalysis** data, not rain-gauge records.

Table 191 — Rainfall series distributed with the International Edition

File	Place	Period	Days	Mean annual rain	Source
`NewYork.csv`	New York (grid point over Manhattan, 40.81 N, 74.02 W)	01/01/1991 to 31/12/2020	10,958	1,125 mm	ERA5 reanalysis via Open-Meteo
`London.csv`	London (51.49 N, 0.16 W)	same	10,958	649 mm	same
`CapeTown.csv`	Cape Town (33.99 S, 18.43 E)	same	10,958	495 mm	same

The format is one value per line: daily precipitation in millimetres, with no date. The date of the first day comes from the project (1 January 1991 for these three files).

What they are. ERA5 is the fifth-generation global reanalysis of the European Centre for Medium-Range Weather Forecasts (ECMWF), produced by the Copernicus Climate Change Service (Hersbach et al., 2020, *Quarterly Journal of the Royal Meteorological Society*, 146, 1999-2049). The series were extracted for one grid point of about 9 km through the archive interface of Open-Meteo.com (licence CC BY 4.0) on 14/10/2026. A grid cell is an area average: it smooths intense showers and overstates the number of days with light rain, so it is a starting point and not a substitute for a measured record.

Use for a real design. Replace the example series with the record of a rain gauge near the site, or declare explicitly that you use reanalysis and why.

E.2. Using your own series

1. Obtain a daily record, in millimetres, from the meteorological service or the gauge closest to the site. Record the station, its distance from the site, the period and the source.
2. Save it as a CSV with one value per day. A point or a comma is accepted as the decimal separator, and a header line is ignored.
3. Open it in step 1 (Project & Rainfall) and set the date of the first day.

An incomplete year is dropped on reading, so as not to bias the annual totals. Daily data are required: monthly means hide the dry spells that decide the volume (section 5.1.2).

How long a series. The length needed to stabilise the ideal volume is not a geographical constant: it grows with the suppliable fraction and with the demand of the building (glossary, appendix G). The three example series have thirty years each.

E.3. Future scenarios

The International Edition carries no climate-model projections. To study a future climate, prepare the projected daily series yourself, from the source you choose, and load it as any other file. The rain factor of the probabilistic modulation (section 7.1) offers a simple way to test a drier or wetter series by a declared percentage. Section 3.2 deals with conducting the study.

E.4. What to declare in a study

- the **source** of the series (station or reanalysis product) and its version;
- the **location**, and for a gauge the distance from the site;
- the **period**, with the first and last years;
- whether the series was **corrected, filled or downscaled**, and how;
- for a projection, the model, the scenario and the window, and the method used to correct bias;
- the number of **years** of data.

E.5. Regional and national particulars

The International Edition is neutral on purpose. It ships **no regional rainfall database, no tariff catalogue, no cost catalogue and no emission-factor series**, and it applies no national standard, no national tariff structure and no predefined currency. Everything that changes from one country or region to another is entered by you, and the program calculates with what you enter.

Table 192 — What the user supplies in the International Edition, and what happens without it

You supply	Where in the program	Without it
the daily rainfall series of the site (CSV, TXT or DAT; one value per line, in millimetres)	step 1, climate source «own file»	the simulation cannot run
the water and sewer tariffs, in the currency you choose	economic inputs, button 4. Water and Sewage Tariffs	the water bill is zero, and the economic analysis shows nothing
the costs of works, pump, treatment and maintenance	step 4 and the economic inputs	costs are zero, so payback and net present value say little (section 4.7)
the electricity tariff	button 2. Motor Pump & Energy Cost	the pump energy costs nothing
the grid emission factor and the emission factor of the potable water you replace	life-cycle inputs	the life-cycle assessment credits no avoided emissions

Standards. The program does not decide which standard applies to your project. Quality requirements, permitted uses, the first-flush depth and the maintenance interval are set by the standard or regulation of the place where the system is built. Look it up, enter its limits as the quality criterion (section 4.6) and cite it in the study. The four quality classes of the program are a comparison scale, not the text of a standard.

Currency and units. There is no predefined currency: choose it in the economic step, and every value in the project is read in that currency. Volumes are in cubic metres and litres, depths in millimetres. A tariff published in other units is converted when entered: the New York example, for instance, publishes its water charge per hundred cubic feet, and the project records it per cubic metre.

The three worked examples. The edition carries three cities so that it opens with something to run, and each is one end of a different tariff structure.

Table 193 — The worked examples of the International Edition: rainfall, currency and tariff structure

City	Currency	Mean annual rainfall	Tariff structure
New York	US$	1,125 mm	water at a single rate, sewer at 159% of the water charge, minimum daily charge
London	£	649 mm	volumetric water and wastewater charges plus standing charges
Cape Town	R	495 mm	stepped blocks for water and for sanitation, with monthly standing charges

The three share one building, so that the results compare. They are examples, not a database of those cities: their rainfall is a reanalysis grid cell and their tariffs are illustrative (next section).

E.6. Description of the data and how far to trust it

This section summarises the data the edition ships. The full inventory, with sizes, licences, source addresses and the way to reproduce each item, is in `docs/DADOS.md` of the repository, and every figure below is the one given there.

What ships. Three daily rainfall series, three example projects with their tariffs, the reports made from them, a few reference files of the core, the 3D viewer and the manual. The largest data file is 0.04 MiB. No tracked file of the repository exceeds 50 MiB.

Table 194 — Example rainfall series of the International Edition: description and quality

Field	New York	London	Cape Town
file	`NewYork.csv`	`London.csv`	`CapeTown.csv`
location (grid point)	40.81° N, 74.02° W	51.49° N, 0.16° W	33.99° S, 18.43° E
mean annual rainfall	1,125 mm	649 mm	495 mm
days	10,958	10,958	10,958
missing values	none	none	none
period	01/01/1991 to 31/12/2020	same	same

Rainfall: source, licence and quality. The series are daily precipitation from the ERA5 reanalysis, taken at one grid cell of about 9 km through the Open-Meteo archive interface and retrieved on 14/10/2026. Licence: CC BY 4.0, with attribution (weather data from Open-Meteo.com, based on the ERA5 reanalysis of the Copernicus Climate Change Service; Hersbach et al., 2020, *Quarterly Journal of the Royal Meteorological Society*, 146, 1999-2049). Redistribution is allowed with that attribution. A reanalysis cell is not a rain-gauge record: it smooths intense showers and overstates the days of light rain. The program does not fill gaps, so a series with missing values must be completed by you before use. For a real design, use the series measured at the site.

Example tariffs: illustrative, not verified. The prices were read from each utility's published tariff and entered as printed: New York from the NYC Water Board and the city's Department of Environmental Protection, FY2027 rates, in force from 01/07/2026; London from Thames Water, charges 2026-27 for a metered household, taken as starting on 01/04/2026; Cape Town from the City of Cape Town, Tariffs 2026/27 for a domestic, non-indigent customer, taken as starting on 01/07/2026. For the last two the effective date is inferred, not printed. Each tariff was checked by hand, once, against the bill it produces (for 18 m^3 per month: US$ 88.08, £ 91.97 and R 1,252.32), and an automatic test recomputes those bills. There is no independent second check. The address of each document, the access date and a checksum of the file were not recorded when the examples were built, so the figures cannot be traced to a stored copy of the document. **Use them to learn the method, never for a real project:** enter the tariff of your own utility.

What is left at zero, on purpose. The costs of works, pump, treatment and maintenance, the electricity tariff and the grid emission factor are zero or unset in the examples, because no official source was used for them. The payback and the net present value shown for the three example projects are therefore **not results**. The tutorial of the manual uses round, illustrative figures, labelled as such wherever they appear.

Reference files of the core. Three small files ship with the program, none of which supplies a value to your project: `costs_database.json` holds only the cost-file structure, with no prices, currency or regional factors (costs start at zero and you enter your own); `rotas_producao_agua.json` lists routes by which potable water is produced, with the emission avoided per cubic metre when rainwater replaces it, and you declare the route you replace; `fatores_emissao_rede_padrao.json` is an empty template, so the grid factor is zero until you enter the factor of the grid that supplies the project.

How to cite and attribute. Cite the weather data as above whenever a study uses the example series. The sky map of the 3D viewer is the «Quarry» map of Poly Haven (CC0 1.0) and the viewer library is three.js (MIT).

Appendix F — Files, folders and formats

Everything the program reads and writes, and where each thing is kept.

F.1. What the program reads

Table 195 — Formats the program reads and where each one is loaded

Format	Extension	What it is	Where it is loaded
project	`.triton`	a complete study, with the rain inside	Open Project
old project	`.json`	project from an earlier version, same content	Open Project
legacy project	`.csv`	project saved by an early version of the program, as a table	Open Project
rainfall series	`.csv`	one column of millimetres per day (the edition ships three examples in `data/rainfall`)	step 1. Project & Rainfall
daily demand	`.csv`	measured consumption, day by day	step 2. Building & Demand
scenarios	`.xlsx`	one row per scenario	Scenarios & Tools menu

The rainfall series in CSV is the simplest format possible: one line per day, with the depth in millimetres. The program accepts a point or a comma as the decimal separator, and ignores a header line if there is one. An incomplete year is discarded on reading, so as not to bias the annual totals.

> **Legacy project in CSV.** The old format does not keep everything the current version uses: demand modulation, materials, multi-criteria weights and the rainfall series are left out. When opening such a file, the program warns and adopts the default values for what is missing. Section 3.8 shows what to check after importing.

F.2. What the program writes

Table 196 — Formats the program writes and where each one is generated

Format	Extension	What it carries	Where it is generated
project	`.triton`	all the parameters and the rainfall series	Save Project
report	`.pdf`	the complete study, ready to hand over	step 9. PDF Reports
spreadsheet	`.xlsx`	daily series, sweep and indicators	step 10. Export
table	`.csv`	the same data, as delimited text	step 10. Export
data	`.json`	the results, for reprocessing	step 10. Export
drawing	`.dxf`	the hydraulic schematic, for CAD	step 10. Export
drawing	`.svg`	the same schematic, as a vector image	step 10. Export

In CSV export you choose the separator: **semicolon** to open in a spreadsheet set to a language that uses the decimal comma, **comma** for the international standard. Choosing wrongly makes the spreadsheet open everything in a single column.

The drawing comes in three presentations: **A3 technical sheet**, **simple schematic** and **block library**, the last accompanied by a JSON file with the properties of the components, for BIM coordination. Section 3.9 deals with all of them.

F.3. The project file, inside

The `.triton` file is a text file in JSON format. It can be opened in any text editor, and that is deliberate: a published study needs to be inspectable without the program.

It has seven sections:

Table 197 — The seven sections of the project file and what each one holds

Section	What it holds
`metadata`	project name, identifier and dates
`rainfall`	the city, the period and the **whole daily series**
`building_and_demand`	area, coefficient, occupants, consumption and fraction
`demand_modulation`	the weekly, monthly and daily profiles, when there are any
`reservoirs_and_pumping`	volumes, thresholds and the pump set
`water_quality_and_etap`	target class, disinfection and treatment
`financial_and_economic`	tariffs, taxes, adjustments and period

Appendix A lists all the parameters, with the exact name of each field.

> **The rainfall series goes inside the file.** That is what makes the project reproducible: whoever receives the file obtains exactly your numbers, without needing the original rainfall file. On the other hand, a project with thirty years of series takes up about 160 kB — little for a file and a lot for an e-mail attachment with twenty of them.

F.4. Where things are kept

Table 198 — Location of the program's files and of the user's files

What	Where
the program	`C:\Program Files\Triton`
the rainfall series that come with it (New York, London, Cape Town)	in the program folder, in `data\rainfall`
the manual's cases	in the program folder, in `casos`
the three example projects (New York, London, Cape Town)	in the program folder, in `examples`
your projects and reports	**wherever you choose when saving**

The program does not create a working folder or keep hidden files. Each save asks for the destination, and nothing you produce stays inside the installation folder — which means that reinstalling or updating the program deletes nothing of yours.

F.5. The batch study file (`estudo.json`)

Used by `triton estudo` (chapter «Comparing many cases at once»). Schema `triton-estudo`, version 1.

Table 199 — Sections of the estudo.json file (schema triton-estudo, version 1)

Section	Content
`esquema`	`{"nome": "triton-estudo", "versao": 1}`; any other version is refused
`estudo`	`id` (letters, digits, dot, hyphen and underscore), `titulo` (title), `tipologia` (`escolar` school, `comercial` commercial, `residencial-unifamiliar`, `residencial-multifamiliar`, `hospitalar` hospital, `aeroportuario` airport or `outra` other), `tipologia_rotulo`, `autores` (authors), `nota` (note)
`projeto_base`	`arquivo`: a `.triton`, with a path relative to `estudo.json`; or `modelo`: `"edicao"`, the project template of the edition (each case must then give area, demand, share and rainfall: nothing is assumed)
`padroes`	`substituicoes` (substitutions) and `clima` (climate) applied to every case; what a case declares wins over the default
`casos`	list; each case has `id`, `nome` (name), `grupo` (group; by default the typology), `projeto` (another `.triton` for this case), `clima` and `substituicoes`
`clima`	`arquivo` (daily rainfall series, CSV), `data_inicio` (dd/mm/yyyy), `nome` and `fonte` (labels that go into the provenance)
`analise`	`tipo` (`technical`, `economic`, `environmental`, `topsis` or `all`), `volume` (`otimo_tecnico` technical optimum, `topsis`, `smaa_vikor` or a volume in litres), `pesos` (four dimension weights — technical, economic, environmental, structural — eight criterion weights, or `"critic"` for objective weights computed from the results; three, from studies up to version 0.1.0, are still accepted and seven are refused), `partes_no_eixo` (eight criterion shares, in the order of the criteria), `tolerancia_faixa` (tolerance of the choice band, 0 to 1, default 0.05) and `semente` (seed)
`saidas`	`formatos` (`csv`, `json`, `md`, `tex`, `xlsx`), `metricas`, `casas_decimais` (one integer or one per metric), `idioma` (`auto`, `pt-BR`, `pt-PT`, `en`, `es`, `zh`), `milhar` (thousands separator), `legenda` (caption) and `orientacao` (`casos_nas_linhas` or `metricas_nas_linhas`)

Keys that start with _ are comments and the program ignores them. An empty field, `null` or «XX» means «to be filled in»: the validation refuses it and says where it is. An unknown key is an error, with the closest match suggested. `triton estudo esquema` prints the JSON Schema of the file, for completion and checking in an editor.

F.5.1. Aliases of the substitutions

Table 200 — Aliases of the substitutions and the project field each one changes

Alias	Project field	Unit
`area_captacao_m2`	`area`	m²
`coeficiente_escoamento`	`runoff_coeff`	0 to 1
`descarte_mm`	`discard`	mm
`usuarios` (also `populacao`, `pessoas`, `ocupantes`, `users`, `residents`)	`residents_count`	people
`demanda_per_capita_l_dia`	`demand_value`	L/person·day
`demanda_total_l_dia`	`demand_value` (the total demand divided by the users)	L/day
`fracao_pluvial_pct` or `fracao_pluvial`	`rainwater_share`	% or 0 to 1
`volume_reservatorio_l`	`lower_tank_fixed` (and `lower_tank_mode` = fixed volume)	L
`volume_maximo_l`, `passo_volume_l`	`lower_tank_max` (sweep), `lower_tank_step`	L
`reservatorio_superior_l`	`upper_tank_vol` (and `upper_tank_used`)	L
`limiar_bombeamento_l`, `economias`, `irrigacao_l_dia`	`pumping_threshold`, `num_economias`, `irrigation_liters_per_day`	L, units, L/day
`data_inicio`, `regra_phi`, `delta_ideal_pct`	`start_date`, `phi_operation_rule`, `delta_ideal`	dd/mm/yyyy, 0 to 1, %/m³
`periodo_analise_anos`, `tma_pct_mes`, `tarifa_energia`	`analysis_period_years`, `tma`, `elec_tariff`	years, % per month, currency/kWh

Besides the aliases, the key of a substitution can be **any field that `--set` accepts** (for example `cost_labor`) or a **dotted path of the `.triton` file itself**, such as `inputs.building_and_demand.catchment_area_m2`. The path must exist in the project and the value must have the same type as what is already there; otherwise the case ends with a clear error that lists the available keys. An unknown alias is also refused, with the closest match suggested. Two names for the same parameter in the same case (`area_captacao_m2` and `area_m2`, or `fracao_pluvial` and `fracao_pluvial_pct`) are a conflict. The fraction from 0 to 1 refuses 40 (probably a percentage); the percentage refuses anything outside 0 to 100.

The substitutions go through the same fraction reconciliation as `--set`, and the preliminary cost fill (CAPEX) runs **after** them, so the price of the tank follows the volume of the case. `triton estudo apelidos` lists every alias and metric, in the language of the edition.

F.5.2. Outputs of the study

Table 201 — Files that triton estudo run writes to the output folder

File	Content
`resultados.csv`	**tidy** format: one row per case and metric (`estudo_id`, `caso_id`, `caso`, `grupo`, `metrica`, `rotulo`, `valor`, `unidade`, `status`); decimal point, no thousands separator, UTF-8
`resultados.json`	the same values plus the **provenance**: Triton version, edition, SHA-256 of `estudo.json` and of each project and rainfall series, rainfall source, credit and licence, warnings and the run date
`tabela.md`	Markdown table, with the numbers in the format of the language (decimal comma in Portuguese and Spanish, point in English and Chinese)
`tabela.tex`	LaTeX table with `booktabs` (`\toprule`, `\midrule`, `\bottomrule`), ready to paste; needs `\usepackage{booktabs}`
`tabela.xlsx`	optional (`xlsx` in `formatos`): real, formatted numbers, plus the `tidy` and `proveniencia` sheets
`resumo.md`	short summary: cases, range of each result, warnings, sources and licences
`casos/<id>/resultado.json` and `analise.json`	every metric of the case and the full analysis of the engine (this is what `resumo` and `texto` read)
`estudo.json`	copy of the study that produced the folder
`consolidado.csv` and `consolidado.md`	written by `triton estudo consolidar` (not by `run`): one row per typology (`grupo`), case, metric and unit, with `n`, minimum, mean, median and maximum over the `resultados.csv` files found

The outputs carry no absolute path: projects appear with a path relative to `estudo.json` (or just the name). Two runs of the same study give identical files; the run date is the only difference, and the environment variable `SOURCE_DATE_EPOCH` fixes it. The `xlsx` stores its creation date in the file properties and is identical in content, not byte for byte.

Resuming and exit codes. In an output folder that already has results, `run` requires `--retomar` (skips the finished and unchanged cases: the fingerprint of a case includes the study, the files, the version and the edition) or `--sobrescrever` (redoes everything). The exit code is 0 if every case was computed, 1 if some case ended with an error (the outputs of the others are written and the failed case shows `status erro`) and 2 if the study or the arguments are invalid.

Metrics. The volume of each case is, by default, the technical optimum of the sweep (`volume: "otimo_tecnico"`); with `"topsis"`, the first of the ranking; with a number, the fixed volume. The available metrics include `volume_l`, `economia_agua_potavel_pct` (potable water saving), `agua_pluvial_m3_ano` (rainwater used), `agua_potavel_m3_ano`, `extravasamento_m3_ano` (overflow), the days with full, partial and no supply, `capex`, `vpl` (net present value), `economia_anual_agua` (annual saving on the water bill), `opex_anual`, `tir_anual_pct` (IRR), `payback_descontado_meses`, `co2_liquido_vida_kg`, `indice_topsis`, `faixa_topsis_min_l` and `faixa_topsis_max_l` (the ends of the TOPSIS choice band) and `aceitabilidade_smaa_pct`, plus the inputs of the case (`area_captacao_m2`, `usuarios`, `demanda_total_l_dia`, `chuva_media_anual_mm`). The economic metrics need `analise.tipo economic` or `all`; the environmental ones, `environmental` or `all`. The raw names of the report (`potable_savings_pct`) are also accepted. Monetary values come out in the currency of each project; if the cases have different currencies, the summary warns that they are not comparable and the comparison does not aggregate them. With CAPEX equal to zero (costs not entered), the summary warns that NPV, IRR and payback are not results.

Text with the numbers. `triton estudo texto` replaces, in your `.md` template, the markers wrapped in double braces (two on each side; the examples below are shown without them):

`economia_agua_potavel_pct:caso-01` (the value of one case), `economia_agua_potavel_pct:@min`, `@max`, `@media` (mean), `@mediana` (median) (over the computed cases; `@media(escolar)` restricts to one group), `n_casos` and, after a vertical bar, the decimal places (`vpl:caso-01|0`). Where a result is missing the marker becomes «XX» and the command lists the gaps (with `--estrito`, it exits with code 1). An unknown metric is an error.

F.6. Compatibility between versions

Table 202 — Compatibility between versions of the project file

Situation	What happens
project from an earlier version	opens; new fields take the default
project from this version in an earlier version	may not open, or may lose fields
legacy project in CSV	opens with a warning; check what section 3.8 lists
JSON file from another program	**rejected**, with a message of its own

The last row deserves an explanation. A JSON file that is not a Triton project could, in principle, be accepted and filled in with default values — and the user would simulate 100 m^2 believing they were simulating the 180 m^2 the file describes. The program prefers to stop the opening with a message of its own, which is inconvenient and is correct: a project opened wrongly produces an entire study that is wrong.

Appendix G — Glossary

Technical terms and acronyms used in the manual and in the program. The terminology guidelines of Triton close the appendix.

Allowance within the minimum. Tariff regime in which the fixed value already includes a volume of consumption. Saving **below** the allowance does not reduce the bill.

Availability charge. Tariff regime in which a fixed value is **added** on top of the metered consumption. Every cubic metre saved earns a discount.

BD+C (*Building Design and Construction*). Family of LEED rating systems for the design and construction of new or substantially refurbished buildings. It is the family dealt with in this manual, in versions 4, 4.1 and 5.

BIM (*building information modelling*). Digital representation of the building in which each component carries properties beyond geometry, which allows the designs of different disciplines to be coordinated.

CAD (*computer-aided design*). The program exports the hydraulic schematic in DXF, an exchange format accepted by CAD programs.

CAPEX (*capital expenditure*). Initial investment.

Carbon payback. Time for the net annual emission saving to pay off the carbon embodied in the manufacture of the system.

Catchment area. **Horizontal** projection of the impermeable roof surface on which water is collected, as in EN 16941-1:2024. It is not the sloping area of the roof, nor the contributing area used to size gutters.

CDD (*consecutive dry days*). Longest sequence of consecutive days with rain below 1 mm.

Choice band. In the multi-criteria decision, the volumes whose score, rescaled from the worst (0) to the best (1) of the volumes evaluated, lies within a tolerance of the best — 5% of the score range by default. The program reports it instead of a single «best volume»; it depends on the grid of volumes and on the tolerance, which a study must declare.

Criterion shares. In the multi-criteria decision, how much of the weight of each dimension goes to each of its criteria. Only the proportion within the dimension matters; the default is equal shares, and a share of zero removes the criterion from the calculation.

CRITIC (*criteria importance through intercriteria correlation*). Method of Diakoulaki, Mavrotas and Papayannakis (1995) that computes objective weights from the decision matrix: each criterion weighs by its contrast across the alternatives times its independence from the other criteria. The weights express no preference and change with the set of volumes evaluated.

CSV (*comma-separated values*). Text file format in which each line is a record and the columns are separated by a character, typically a comma or a semicolon. It is the format of the precipitation series.

CWD (*consecutive wet days*). Longest sequence of consecutive days with rain equal to or above 1 mm.

Discounted payback. Time for the cumulative discounted cash flow to cross zero.

DN (*nominal diameter*). Commercial designation of the diameter of a pipe or fitting, in millimetres. It corresponds exactly to neither the internal nor the external diameter: it is a reference number from which the real dimensions follow, tabulated by standard.

Dry mass (of the system). Mass of the cisterns, pipes, pump and fittings without water, given by the program's weight calculator. It is a criterion of the structural dimension of the multi-criteria decision.

DXF (*drawing exchange format*). Exchange format for technical drawings, read by practically all CAD programs.

EDGE (*excellence in design for greater efficiencies*). Certification system of the World Bank's International Finance Corporation. It measures the percentage saving against a local baseline in three independent dimensions and requires each to cross the threshold.

EN (*Europäische Norm*, European standard). Standard published by the European Committee for Standardization. In this manual, EN 15978, which defines the building life cycle modules, EN 15804, which governs the environmental product declarations of construction products, and EN 16941-1, on rainwater harvesting systems.

EPD (*Environmental Product Declaration*). Third-party verified document, according to ISO 14025 and, in construction, EN 15804, that publishes the life cycle impacts of a product per declared unit. It is the preferred source of emission factors for materials and equipment.

ESG (*environmental, social and governance*). Set of environmental, social and governance criteria used in assessing companies and developments. The program feeds environmental indicators of that set.

ETCCDI (*Expert Team on Climate Change Detection and Indices*). International working group that standardised the indices of climate extremes, of which the program calculates eight.

First flush. Initial depth of rain diverted from the system, which carries the dirt deposited on the roof. In Triton it is **subtracted** from the day's rain, in millimetres. The manual's examples use 2 mm; the right value depends on the roof and on the local practice, and must be declared.

GRI (*Global Reporting Initiative*). International standard for corporate disclosure of social and environmental performance. Its 303 series deals with water and effluents.

IFC. The acronym designates two different things. In certification, it is the World Bank's *International Finance Corporation*, which develops EDGE. In the BIM context, it is *Industry Foundation Classes*, an open exchange format the program does **not** export: the program's BIM export is a JSON file of properties.

Ideal volume (optimal tank volume). Smallest tank volume of the simulation grid from which the marginal gain in potable water saving ($\Delta E_{pot} / \Delta V$) falls below a declared threshold (typically $1.0\%/\text{m}^3$ or $0.5\%/\text{m}^3$). It avoids oversizing tanks, securing the best cost-benefit ratio.

Individual metering. Metering per dwelling unit in a multi-family building. Entered in the program as the number of units.

INT. Acronym of the program's International Edition: it opens in English and ships no national data. Rainfall series, tariffs, costs, currency and emission factors are entered by the user; three example cities (New York, London and Cape Town) come with it.

IPCC (*Intergovernmental Panel on Climate Change*). Intergovernmental panel that synthesises scientific knowledge on climate change and organises the assessment reports to which the climate projections refer.

IRR. Internal rate of return. The discount rate that makes the net present value zero.

ISO 14040. International standard that sets out the principles and framework of life cycle assessment. An inventory conforming to ISO 14040 requires traceability of each flow and external critical review, requirements a screening assessment does not meet.

JSON (*JavaScript object notation*). Structured text file format, readable by people and by programs. It is the internal format of the `.triton` file.

LCA. Life cycle assessment. Method that accounts for the environmental impacts of a product over its whole existence, from the extraction of raw materials to disposal. The program's is a **screening** one, not a full inventory conforming to ISO 14040.

LCOW (*levelised cost of water*). Ratio between the investment plus the discounted running costs of the system (pumping energy, operation and maintenance, chlorine and the treatment line) and the discounted volume of rainwater delivered over the analysis horizon, at the same rate, in currency per m^3. It allows the cost of the rainwater to be compared directly with the utility's tariff, and it is one of the eight multi-criteria criteria (section 2.10).

LEED (*leadership in energy and environmental design*). Environmental certification system for buildings of the *U.S. Green Building Council*, the most widespread internationally. It deals with water efficiency in the *Water Efficiency* category: in version 4, by credits WEc1 and WEc2; in version 5, by credit WEc2, *Enhanced Water Efficiency*.

Marginal gain. Change in the saving potential per cubic metre added to the tank, in %/m^3 ($\Delta E_{pot} / \Delta V$). Selection criterion of the ideal volume.

Metre of head (m). Unit of pressure equal to that exerted by a column of water one metre high, about 9.81 kPa. It is the usual unit in building installations. The project file and some screens abbreviate it to «m.c.a.» (the abbreviation of the same unit in a few languages).

MARR (*minimum attractive rate of return*). The discount rate adopted in the economic analysis. It is entered in the field `tma`, in per cent per month.

Motor efficiency. Ratio between the mechanical power at the shaft and the electrical power drawn from the mains. Motor standards require it to be marked on the rating plate.

Non-potable water. Water not intended for direct human consumption, but which meets the quality required by the applicable national standard for the uses admitted: flushing toilets and urinals, washing vehicles, pavements and floors, landscape irrigation, laundry and cooling towers.

NPV. Net present value.

Overflow (spillage). Volume that exceeds the capacity of the tank and is led away by the overflow pipe when the tank is already full.

Payment floor. Tariff regime in which the bill **does not go** below a value. Different from the availability charge: the floor limits from below, the availability charge adds on top.

PB (*base price*). Base price, in currency per m^3, of the exponential tariff formula `PB × Cⁿ`, in which `C` is the month's consumption and `n` the exponent for that consumption.

PEAD. Code of the high-density polyethylene (HDPE) tank material in the project file.

Pluvial demand (D_{pl}). Part of the building's daily water demand that can be supplied by the harvesting system ($D_{pl,t} = D_{tot,t} \times f$). It corresponds to the non-potable points of use connected to the rainwater network.

Potable water. Water that fully meets the drinking-water standard of the country of the project, intended for drinking, food preparation and personal hygiene.

Potable water saving potential (E_{pot}). Fraction of the **total** demand of the building supplied by rainwater ($E_{pot} = \sum V_{con} / \sum D_{tot} \times 100\%$). It is the program's central indicator, bounded above by the suppliable fraction ($E_{pot} \le f$).

pp. Percentage points. Used to express the difference between two percentages: from 35% to 37% is two percentage points, not two per cent.

PRCPTOT. Total annual precipitation on wet days.

PRFV. Glass-fibre reinforced plastic (GRP), the material of medium and large tanks. It appears in the program as «fibreglass» (code `FIBRA`).

Pump efficiency. Ratio between the hydraulic power delivered to the water and the mechanical power at the shaft. It does not include the motor.

PVC. Polyvinyl chloride, the material of building cold-water piping and of the first-flush diversion columns.

R95p. Sum of the precipitation of the days above the 95th percentile of the wet days.

Rainwater. Atmospheric precipitation collected directly on impermeable roof surfaces (roofs and waterproofed slabs), before it reaches the ground or public drains.

Rainwater harvesting. Use of the water falling on roofs for non-potable uses in buildings. «Harvesting» is preferred to «reuse», since rainwater collected on the roof is a primary resource and not an effluent of earlier human use.

Rainwater harvesting system. Integrated set of building components — catchment area, pipes, first flush, treatment line, lower cistern, upper tank, pump set or pressure pump and an independent distribution network — designed to collect, treat, store and supply non-potable water.

Representative rainfall series length (N_{rep}). Shortest continuous period, in years of daily rainfall data, needed to stabilise the sizing and performance of the system statistically (reproducing the ideal volume and the saving potential of the full series with confidence $\ge 90\%$), according to the method of Geraldi and Ghisi (2017, 2018, 2019). The length needed is not a fixed geographical constant: it grows with the suppliable fraction and with the demand level of the building.

Retroactive allowance. Tariff regime in which consumption up to the allowance pays a fixed value and consumption above it is billed in full from 0 m^3.

Runoff coefficient. Fraction of the rain that actually reaches the tank, after losses to absorption, evaporation and initial wetting of the roof.

RX1day, **RX5day**. Largest precipitation in one and in five consecutive days, in the year.

SB (*basic service*). Basic service charge: the fixed monthly part of a water bill, added to the result of the exponential formula.

SDII (*simple daily intensity index*). Mean precipitation of the wet days.

SI (*seasonality index*). Walsh and Lawler seasonality index. Zero when rain is uniform over the year.

SMAA (*stochastic multicriteria acceptability analysis*). Method that draws weights and returns the probability of each alternative winning. In the program, the eight weights are drawn with 25% expected on each dimension.

SSP (*shared socioeconomic pathways*). Coherent hypotheses of global development and the corresponding emissions. They are combined with the climate models to produce projections.

Stochastic demand. Modelling daily water consumption as a probabilistic variable that varies from day to day and between realisations (Silva and Ghisi, 2016), allowing the uncertainty range of the sizing and of the performance indicators to be assessed under real variability of use.

Storage efficiency. Rainwater delivered per day divided by the volume of the lower cistern, in %: the daily turnover of the stored volume. It falls as the volume grows and is a technical criterion of the multi-criteria decision. Not to be confused with the mean occupancy of the tank.

Stormwater. Rainwater after urban surface runoff, or when led by building drainage and storage pipes and systems. In this manual the word is used only for drainage; the harvesting system, the rainwater network, the pluvial demand, the rainwater consumption and the overflow all take «rainwater» or «pluvial».

Suppliable fraction (non-potable demand share, f). Percentage of the building's total water demand (D_{tot}) that can be supplied by rainwater ($f = D_{pl} / D_{tot}$). It is the **insurmountable asymptotic**

ceiling of the potable water saving potential ($E_{pot} \le f$): even with infinite storage and unlimited rain, the potable saving never exceeds the suppliable fraction, because the rest ($1 - f$) is reserved for potable uses. It is distinct from volumetric reliability ($C_v = E_{pot} / f$), which assesses the supply of the rainwater part.

Time reliability (C_t). Percentage of days on which the system fully ($V_{con,t} = D_{pl,t}$), partly or not at all supplied the rainwater demand.

TOPSIS (*technique for order of preference by similarity to ideal solution*). Multi-criteria ranking method of Hwang and Yoon. In the program, it ranks the volumes by eight criteria in four dimensions: technical, economic, environmental and structural.

Treatment line (code `ETAP`). In the program, the set of inlet filter, disinfection and polishing filter that treats the rainwater before use.

UV. Ultraviolet radiation, used in water disinfection by inactivating micro-organisms. It acts only at the moment of passage through the reactor and leaves no residual, unlike chlorination.

VIKOR. Multi-criteria decision method proposed by Opricovic, which seeks a compromise solution between conflicting criteria. See also *SMAA*.

Volumetric reliability (C_v). Fraction of the **rainwater** demand the system supplied ($C_v = \sum V_{con} / \sum D_{pl} = E_{pot} / f$). Not to be confused with the saving potential, whose denominator is the total demand of the building.

WEM. Coding of the EDGE water efficiency measures. WEM14 is the rainwater harvesting system.

XLSX. Microsoft Excel workbook format, based on compressed XML. It is one of the export formats for spreadsheets and command-line results.

YAS (*yield after spillage*). Operating rule in which overflow is calculated **before** the demand is withdrawn and, in the strict form, the day's withdrawal comes only from the volume stored the day before. The program calculates overflow first, as YAS does, but lets the day's rain meet the day's demand; it lies between YAS and YBS (section 2.1).

YBS (*yield before spillage*). Operating rule in which the demand is withdrawn **before** overflow is calculated. It assumes consumption before the day's rain and overestimates the yield; the program does not adopt it, and its result lies between YAS and YBS.

G.1. Triton's terminology and naming guidelines

Consistent terminology is essential to technical rigour in scientific papers, technical reports, the graphical interface and Triton's documentation. The conventions below detail the distinction between related terms that are often confused.

G.1.1. 1. Rainwater and stormwater

Table 203 — Terminology for rainwater and stormwater

Term	Definition and context of use	Status in Triton
rainwater	Precipitation collected directly on the roof (roof or waterproofed slab), before it reaches the ground or drains. It refers to the **water source** and the resource collected.	**Canonical and preferred**, also for systems, networks and the balance («rainwater network», «rainwater demand»).
stormwater	Rainwater after urban surface runoff, or when led by building drainage. It applies to the **drainage** infrastructure.	Used only for drainage.

G.1.2. 2. Suppliable fraction, pluvial demand, potential and reliability

To avoid the mathematical and conceptual ambiguities often found in the literature:

Table 204 — Fundamental quantities of the water balance and relations between fraction and potential

Quantity	Symbol / Code	Definition	Formula	Relation / Ceiling
Suppliable fraction	f / `rainwater_share`	Share of the building's total demand corresponding to non-potable points of use that can be connected to the harvesting system.	$f = D_{pl} / D_{tot}$	Design parameter ($0 \le f \le 1$). It is the **asymptotic ceiling** of E_{pot}.
Pluvial demand	D_{pl} / `rainwater_demand`	Volume of water required by the building's non-potable points of use over a time interval.	$D_{pl,t} = D_{tot,t} \times f$	In L/day or m³/year.
Rainwater volume consumed	V_{con} / `pluvial_consumed`	Volume of non-potable water actually supplied by the rainwater tank to the points of use.	Determined by the daily balance (section 2.1)	$V_{con,t} \le D_{pl,t}$ and $V_{con,t} \le S_{t-1} + C_t$.
Potable water saving potential	E_{pot} / `potential_potable_savings_pct`	Percentage of the building's **total** demand saved by rainwater harvesting.	$E_{pot} = \frac{\sum V_{con}}{\sum D_{tot}} \times 100\%$	**Central indicator**. Always $E_{pot} \le f$.
Volumetric reliability	C_v / `volumetric_reliability_pct`	Percentage of the **rainwater** demand supplied by the stored rainwater.	$C_v = \frac{\sum V_{con}}{\sum D_{pl}} \times 100\%$	$C_v = \frac{E_{pot}}{f}$. It can reach 100% even when $E_{pot} < 100\%$.
Time reliability	C_t / `temporal_reliability_pct`	Percentage of days of the series on which the rainwater demand was 100% supplied ($V_{con,t} = D_{pl,t}$).	$C_t = \frac{N_{full_days}}{N_{total}} \times 100\%$	It measures the security of daily supply without potable top-up.

G.1.3. 3. Recommended naming for papers and reports

- Use **«rainwater harvesting»** (not «rainwater reuse» — rainwater is not an effluent; its use is *harvesting*, not *reuse*).
- Use **«catchment area»** for the horizontal plane of the roof (EN 16941-1) and keep **«contributing area»** exclusively for the hydraulic sizing of gutters under wind.
- Use **«first flush»** for the initial depth diverted, declaring its value in millimetres, not «first-flush threshold».
- Use **«suppliable fraction»** or «non-potable demand share» (not «relative demand» or «saving fraction») to express the share of non-potable uses in total consumption.
- Use **«representative series length»** for the minimum length in years needed for the statistical stabilisation of the simulation (Geraldi and Ghisi method).
- Use **«LCOW»** or **«levelised cost of water»** for the unit cost metric over the life cycle discounted at the minimum attractive rate of return.

Appendix H — References

Standards, publications and databases that support the program's decisions. The list for the International Edition has international standards and publications only. The full list, with the provenance of each citation, is in the program's bibliography module and in the Documentation tab.

H.1. Certification systems

LEED v4 / v4.1 BD+C — USGBC. *Water Efficiency* category, credits WEc1 and WEc2. Registration of commercial projects until 30 Jun. 2027.

LEED v5 BD+C — U.S. GREEN BUILDING COUNCIL. *LEED v5 Building Design and Construction: rating system*. Washington, DC: USGBC, Nov. 2025. Prerequisites WEp1 (*Water Metering and Reporting*) and WEp2 (*Minimum Water Efficiency*), credits WEc2 (*Enhanced Water Efficiency*) and SSc3 (*Rainwater Management*).

EDGE — IFC, World Bank Group. *EDGE Certification Process*, and the WEM coding of the water efficiency measures. Administered by GBCI in more than 120 countries.

GRI 303 — Global Reporting Initiative. Water and effluents, indicators 303-3 and 303-5.

H.2. Methods

Hwang, C.-L.; Yoon, K. (1981). *Multiple Attribute Decision Making: Methods and Applications*. The original formulation of TOPSIS.

Opricovic, S.; Tzeng, G.-H. The VIKOR method and the conditions C1 and C2 of acceptable advantage and stability.

Lahdelma, R.; Hokkanen, J.; Salminen, P. (1998), and **Tervonen, T.; Figueira, J.** (2008). SMAA and SMAA-2.

Diakoulaki, D.; Mavrotas, G.; Papayannakis, L. (1995). Determining objective weights in multiple criteria problems: the CRITIC method. *Computers & Operations Research*, 22(7), 763–770. doi:10.1016/0305-0548(94)00059-H. The objective weights of the multi-criteria decision.

Walsh, R. P. D.; Lawler, D. M. (1981). The seasonality index.

ETCCDI — *Expert Team on Climate Change Detection and Indices*, of the WMO. The indices of climate extremes.

H.3. Water end uses

Mayer, P. W.; DeOreo, W. B. et al. (1999). *Residential End Uses of Water*. Denver: AWWA Research Foundation. Frequency of fixture use: 5.05 flushes and 0.37 washing-machine cycles per person per day; the flushes are the basis of the starts of direct pressurisation.

H.4. Life cycle assessment standards

ISO 14040:2006 — Environmental management: life cycle assessment, principles and framework. The four phases of the assessment.

ISO 14044:2006 — Environmental management: life cycle assessment, requirements and guidelines.

EN 15978:2011 — Sustainability of construction works: assessment of environmental performance of buildings, calculation method. The life cycle modules A to D of the building.

EN 15804:2012+A2:2019 — Sustainability of construction works: environmental product declarations, core rules for the product category of construction products.

EN 16941-1:2024 — On-site non-potable water systems — Part 1: Systems for the use of rainwater. Brussels: CEN, 2024.

H.5. Sizing and performance of rainwater harvesting systems

SOUZA, E. L.; GHISI, E. (2012). Potable water savings by using rainwater for non-potable uses in houses. *Water*, v. 4, n. 3, p. 607-628. doi:10.3390/w4030607.

CAMPISANO, A. et al. (2017). Urban rainwater harvesting systems: research, implementation and future perspectives. *Water Research*, v. 115. doi:10.1016/j.watres.2017.02.056.

CAMPISANO, A.; MODICA, C. (2015). Appropriate resolution timescale to evaluate water saving and retention potential of rainwater harvesting for toilet flushing in single houses. *Journal of Hydroinformatics*, v. 17, n. 3. doi:10.2166/hydro.2015.022.

FEWKES, A.; BUTLER, D. (2000). Simulating the performance of rainwater collection and reuse systems using behavioural models. *Building Services Engineering Research and Technology*, v. 21, n. 2, p. 99-106. doi:10.1177/014362440002100204.

GHISI, E. (2010). Parameters influencing the sizing of rainwater tanks for use in houses. *Water Resources Management*, v. 24, n. 10, p. 2381-2403. doi:10.1007/s11269-009-9557-4.

HASHIMOTO, T.; STEDINGER, J. R.; LOUCKS, D. P. (1982). Reliability, resiliency, and vulnerability criteria for water resource system performance evaluation. *Water Resources Research*, v. 18, n. 1, p. 14-20. doi:10.1029/WR018i001p00014.

SEMAAN, M. et al. (2020). Optimal sizing of rainwater harvesting systems for domestic water usages: a systematic literature review. *Resources, Conservation & Recycling: X*, v. 6, 100033. doi:10.1016/j.rcrx.2020.100033.

H.6. Future climate

HAWKINS, E.; SUTTON, R. (2011). The potential to narrow uncertainty in projections of regional precipitation change. *Climate Dynamics*, v. 37, p. 407-418. doi:10.1007/s00382-010-0810-6.

KISAKYE, V.; VAN DER BRUGGEN, B. (2018). Effects of climate change on water savings and water security from rainwater harvesting systems. *Resources, Conservation and Recycling*. doi:10.1016/j.resconrec.2018.07.009.

LASH, D. et al. (2014). Robust rainwater harvesting: probabilistic tank sizing for climate change adaptation. *Journal of Water and Climate Change*. doi:10.2166/wcc.2014.080.

MARAUN, D. (2016). Bias correcting climate change simulations: a critical review. *Current Climate Change Reports*, v. 2, n. 4, p. 211-220. doi:10.1007/s40641-016-0050-x.

H.7. Life cycle and energy of rainwater systems

GHIMIRE, S. R. et al. (2014). Life cycle assessment of domestic and agricultural rainwater harvesting systems. *Environmental Science & Technology*, v. 48. doi:10.1021/es500189f.

GHIMIRE, S. R. et al. (2017). Life cycle assessment of a commercial rainwater harvesting system compared with a municipal water supply system. *Journal of Cleaner Production*. doi:10.1016/j.jclepro.2017.02.025.

VAZ, I. C. M. et al. (2023). Sustainable rainwater management and life cycle assessment: challenges and perspectives. *Sustainability*, v. 15, n. 16, 12133. doi:10.3390/su151612133.

VIEIRA, A. S. et al. (2014). Energy intensity of rainwater harvesting systems: a review. *Renewable and Sustainable Energy Reviews*, v. 34, p. 225-242. doi:10.1016/j.rser.2014.03.012.

WARD, S.; BUTLER, D.; MEMON, F. A. (2012). Benchmarking energy consumption and CO2 emissions from rainwater-harvesting systems: an improved method by proxy. *Water and Environment Journal*, v. 26, n. 2, p. 184-190. doi:10.1111/j.1747-6593.2011.00279.x.

H.8. Uncertainty and Monte Carlo simulation

SILVA, A. S.; GHISI, E. (2016). Uncertainty analysis of daily potable water demand on the performance evaluation of rainwater harvesting systems in residential buildings. *Journal of Environmental Management*, v. 180, p. 82-93. doi:10.1016/j.jenvman.2016.05.028.

WILSON, E. B. (1927). Probable inference, the law of succession, and statistical inference. *Journal of the American Statistical Association*, v. 22, n. 158, p. 209-212. doi:10.1080/01621459.1927.10502953.

SPEARMAN, C. (1904). The proof and measurement of association between two things. *The American Journal of Psychology*, v. 15, n. 1, p. 72-101. doi:10.2307/1412159.

SALTELLI, A.; RATTO, M.; ANDRES, T.; CAMPOLONGO, F.; CARIBONI, J.; GATELLI, D.; SAISANA, M.; TARANTOLA, S. (2008). *Global Sensitivity Analysis: The Primer*. Chichester: Wiley. doi:10.1002/9780470725184.

H.9. Rainfall data of the example series

HERSBACH, H. et al. (2020). The ERA5 global reanalysis. *Quarterly Journal of the Royal Meteorological Society*, v. 146, p. 1999-2049. The reanalysis behind the three example series that come with the program (appendix E).

Open-Meteo.com. Weather data by Open-Meteo.com, licence CC BY 4.0, based on the ERA5 reanalysis of the ECMWF (Copernicus Climate Change Service). Archive interface consulted on 14/10/2026.

H.10. Emission factors

The sources recorded in the program for the screening factors of appendix C. Their re-verification for this edition is pending.

FRANKLIN ASSOCIATES for the American Chemistry Council (2020). *Cradle-to-Gate Life Cycle Analysis of High-Density Polyethylene (HDPE) Resin*. Table 6.

HAMMOND, G. P.; JONES, C. I. (2008). Embodied energy and carbon in construction materials. *Proceedings of the Institution of Civil Engineers: Energy*, v. 161, n. 2, p. 87-98. doi:10.1680/ener.2008.161.2.87.

EPD Australasia. *Environmental product declaration: PVC pipes*, S-P-05503, 25/11/2022, EN 15804+A2.

Grundfos. *Environmental Product Declaration*, EPD-GRU-20250340-CBA1-EN, 2025, modules A1 to A3.

worldstainless (World Steel Association). CO_2 emissions report, 24/09/2024.

Composites UK. *Embodied carbon data for composites*.

H.11. How to cite the program

When publishing a study done with Triton, cite the program **with the version**, and the edition, and declare the items of section 4.10. A study that cites the program without a version is not reproducible: fixes between versions change results, and section 2.6 gives the example of the pump set's consumption, which changed by 65% between two consecutive versions.

Appendix I — One-page summaries

Detachable summaries. Each sheet fits on one page and serves as a quick reference beside the computer.

I.1. Sheet 1 — The flow of a complete study

Table 205 — Reference sheet: the ten steps of a complete study and the section that deals with each one

#	Step	What is decided in it	Section
1	Project and rain	series, area, coefficient, first flush	4.1
2	Building	building type, demand, suppliable fraction	4.2
3	First simulation	a guessed volume, to see	4.3
4	Sweep	return curve, ideal volume	4.4
5	Arrangement	is an upper tank needed?	4.5
6	Quality	class, disinfection, filters	4.6
7	Economics	real tariff, CAPEX, cash flow	4.7
8	Carbon	inventory, material, payback	4.8
9	Decision	eight criteria in four dimensions, declared weights	4.9
10	Report	outputs and the list of what to declare	4.10

Before publishing: section 4.10, the list of what to declare. Section 5.1, the ten mistakes. Section 5.2, the limitations that affect your case.

I.2. Sheet 2 — The pitfalls, one line each

Table 206 — Reference sheet: the ten design pitfalls and where each one is dealt with

Pitfall	Where
sloping area instead of the horizontal projection	5.1.1
mean monthly rain instead of the daily series	5.1.2
first flush in **litres** when the field wants millimetres	5.1.3
tariff **minimum-charge regime** ignored	5.1.4
school or hospital with a **residential tariff**	5.1.5
expecting more **water** from the upper tank	5.1.6
too **short a series**	5.1.7
quality class chosen by **cost**	5.1.8
comparing with **another program** without declaring the differences of method	5.1.9
publishing the volume with the **highest saving** as the recommendation	5.1.10

I.3. Sheet 3 — The six tariff regimes

Table 207 — Reference sheet: the six tariff regimes and the effect of saving

Regime	When saving
no minimum	every m³ earns a discount
availability charge	every m³ earns a discount; the fixed part remains
exponential formula	every m³ earns a discount; the bill is PB × C^n + basic service
allowance within the minimum	**below the allowance there is no discount at all**
retroactive allowance	going past it, everything is billed from zero
payment floor	the bill does not go below the floor

Quick test: simulate two consumptions, one inside and one outside the minimum block, and compare them with a real bill. If only one matches, the regime is wrong.

The International Edition has no tariff catalogue: the regime is the one of the table you enter (appendix D).

I.4. Sheet 4 — The indicators, and what each one answers

Table 208 — Reference sheet: the indicators and the question each one answers

Indicator	Denominator	Answers
saving potential	**total** demand	how much potable water consumption falls
volumetric reliability	**rainwater** demand	how much of what was intended was supplied
full, partial, no-supply days	days of the series	how often it can be counted on
overflow	—	is the tank small?
marginal gain	—	is it worth enlarging?

```
Epot = volumetric reliability × suppliable fraction
```

I.5. Sheet 5 — The pump set energy chain

```
pumping:   e = ρ · g · H ÷ (η_pump · η_motor)       kWh/m³
start-ups: E = plate × time ÷ η_motor              kWh
```

The plate gives the power **at the shaft**. The motor efficiency separates the shaft from the socket. If left blank, the typical value for the rated power applies; enter the efficiency of your motor when you have its data sheet.

I.6. Sheet 6 — The list of what to declare, summarised

Program: version and edition, with revision.

Rain: source, cut, years; if a projection, model, scenario and window.

Building: area and how it was obtained, coefficient, per capita consumption and its source, **suppliable fraction** and the uses that make it up.

First flush: depth and mode; and how it differs from the other program, if you compare programs.

Volume: selection criterion — marginal-gain threshold, or multi-criteria weights.

Economics: utility, effective date of the table, **minimum-charge regime**, sewage percentage, minimum attractive rate of return, inflation, adjustments and period, and the currency.

Carbon: boundary (water delivered), service life, tank material, grid factor with its source and year, **approximate** factors or those with a **screening label**.

Certification: that classes 2 to 4 are adaptations of the program; for LEED, the version; for EDGE, that only the water bar was assessed.

Appendix J — Example files

The manual prints results; these files are what you open to reproduce them. They are in the program's `casos` folder, and each one carries its rainfall series embedded: they open without the original CSV, on any machine. The rainfall is the ERA5 reanalysis of 1991 to 2020 for New York, London and Cape Town that ships in `data/rainfall` (appendix E); each file carries the water and sewage tariff of its city (appendix D).

Costs are illustrative, not market prices. Only the New York tutorial files (01, 04, 06, 09 and 10) carry costs, in US$, as rounded figures that let you follow the method. The other files compare rainfall, demand and tariff, and leave the costs at zero. Before you draw any economic conclusion, enter your own costs in stage 5.

J.1. The cases of the manual

Table 209 — The example cases and what each one demonstrates

File	Section	What it demonstrates
`01_tutorial_new_york.triton`	4.1 to 4.10	the closed tutorial project in New York: a 4,000 L polyethylene cistern and a pumped feed to a 1,000 L upper tank (illustrative costs, not market prices)
`02_london.triton`	3.1	the tutorial building taken to London, with the London rainfall and the Thames Water tariff (no costs set)
`03_cape_town.triton`	3.1	the tutorial building taken to Cape Town, with winter-concentrated rain and the City of Cape Town stepped tariff (no costs set)
`04_tutorial_sweep.triton`	4.4 and 2.2	the project before the upper tank, in sweep mode, from 0 to 20,000 L in 1,000 L steps (New York)
`05_ten_days.triton`	2.1	the didactic ten-day case, 21 to 30 September 2018 of the New York series, that fits in a spreadsheet
`06_upper_tank.triton`	4.5	4,000 L below plus 1,000 above, the comparison of section 4.5 against 5,000 L in one tank (New York)
`07_school_weekly.triton`	3.4 and 3.5	a 300-pupil school in London with demand modulated by day of the week
`08_hotel_monthly.triton`	3.4	a beach hotel in Cape Town with monthly occupancy concentrated in the dry summer
`09_modulation_tutorial.triton`	7.3 and 7.4	the tutorial sweep with probabilistic modulation set up: the three consumption variables, the rain, the tariff and the investment, 1,000 realisations, seed 42
`10_modulation_catchment.triton`	7.4	the same sweep with the uncertainty on the catchment (area, runoff coefficient, first flush), the rain factor on the New York series, the tariff and the investment; 1,000 realisations, seed 42

J.2. What each one produces

The values below are obtained by **rereading the saved file** and simulating what was reread, not the configuration that generated it. That is the difference that matters: a parameter that does not survive saving shows up here as a wrong number, instead of going unnoticed.

Table 210 — Result each example case produces when reread and simulated

File	Mode	Volume	Potential	Rainwater consumed
`01_tutorial_new_york.triton`	fixed volume	4,000 L	27.09%	162.6 L/day
`02_london.triton`	fixed volume	4,000 L	20.08%	120.5 L/day
`03_cape_town.triton`	fixed volume	4,000 L	14.52%	87.1 L/day
`04_tutorial_sweep.triton`	sweep	ideal: 4,000 L	26.83%	21 volumes
`05_ten_days.triton`	fixed volume	2,000 L	25.70%	51.4 L/day
`06_upper_tank.triton`	fixed volume	4,000 L	27.09%	162.6 L/day
`07_school_weekly.triton`	fixed volume	30,000 L	12.58%	1,134.3 L/day
`08_hotel_monthly.triton`	fixed volume	25,000 L	9.83%	567.9 L/day
`09_modulation_tutorial.triton`	sweep	ideal: 4,000 L	26.83%	21 volumes
`10_modulation_catchment.triton`	sweep	ideal: 4,000 L	26.83%	21 volumes

Case 01 includes the 1,000 L upper tank, and case 06 compares it with a single 5,000 L tank, which gives 27.24% (section 4.5).

J.3. How to run them

File, Open Project, choose the file, and the program loads everything: the rain, the building, the tariff, the costs and the configuration of the analyses. Go through the result steps in the sidebar to see each dimension.

Cases 09 and 10 open with **Probabilistic Modulation** already set up: the variables, the distributions, the number of realisations and the seed of section 7.4. Go to step 13 and click **Simulate**. Both are in sweep mode, which is what gives meaning to the per-volume figures; in a fixed-volume case, the tool shows only the study volume. Case 09 draws the three consumption variables, the rain, the tariff and the investment. Case 10 draws the catchment (area, runoff coefficient, first flush), a rain factor applied to the New York series, the tariff and the investment. Both use 1,000 realisations and seed 42.

The files are in the `casos` folder, inside the program's installation folder. If you want to modify them, **save them under another name**: that way the original case keeps reproducing the number printed in the manual.

J.4. The three projects in `examples`

Besides the manual's cases, the program comes with three example projects in `examples`: the tutorial house in New York, in London and in Cape Town (`new_york.triton`, `london.triton` and `cape_town.triton`). The building is the same in the three, so that the results compare. They leave the costs of works, pump, treatment and maintenance, and the electricity tariff, at zero, because they depend on the site and the market. Enter your own before reading the economic results; until you do, the economic analysis shows only the saving on the water bill, and the payback and the net present value say little.

J.5. What these files are not

They are not design templates. They are **demonstration cases**: the costs, where present, are illustrative; the tariff of each file is the residential water and sewage tariff of its city, entered as a user would enter it, and it is the residential one in all of them, including the school and the hotel (see the limitations in section 5.2). For a real study, replace the tariff, costs and rainfall series with those of your case.